


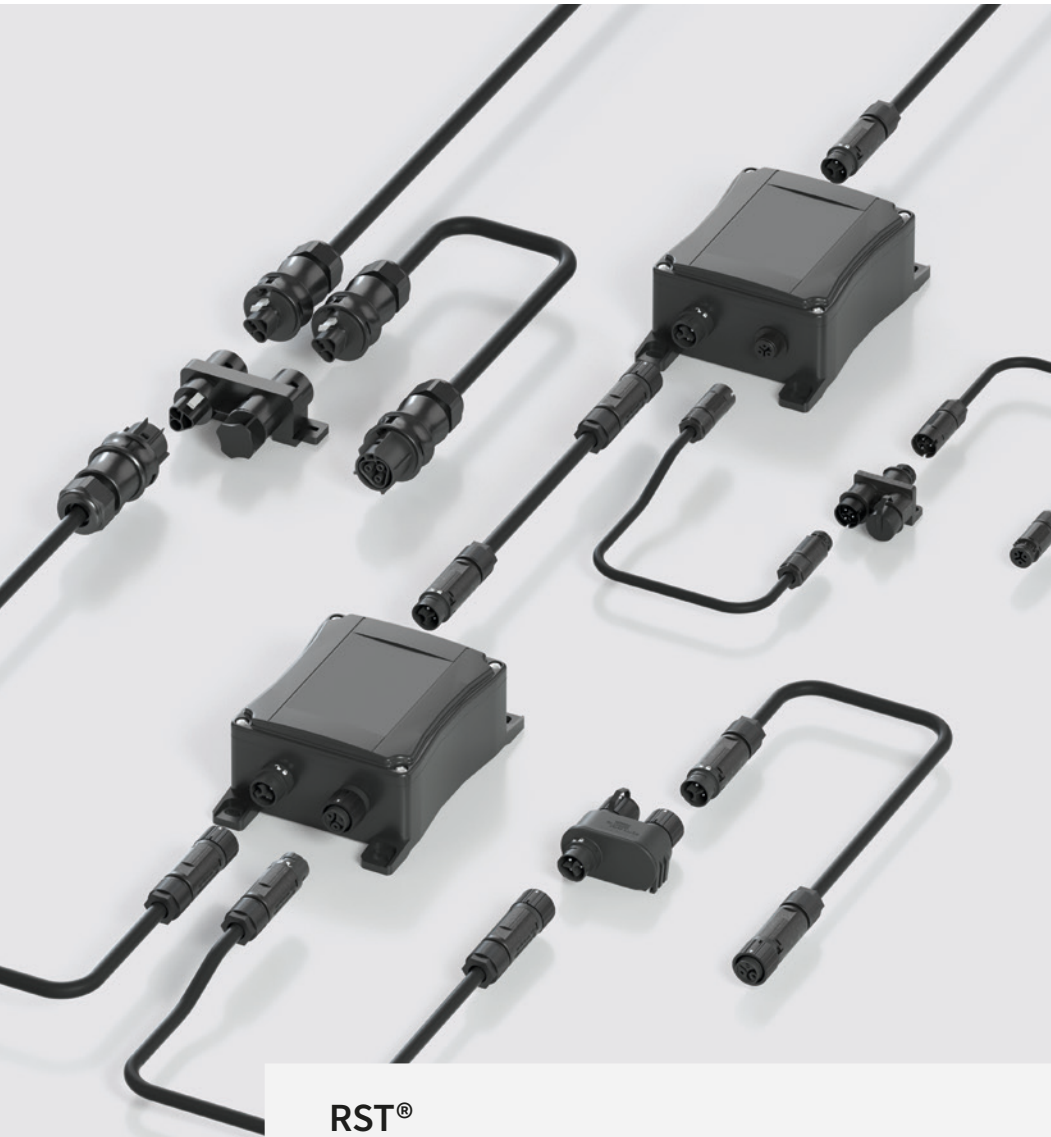

RST®

INSTALL **EFFICIENTLY**

Pluggable electrical installation systems
in highest IP rating.

HELLO WIELAND ELECTRIC

Tradition and innovation - Wieland is representing the synergy of these two guiding principles for more than 100 years.

At Wieland Electric, we are proud to be the world market leader in electrical connections, and have been focusing on safe and innovative technologies since our founding. The beginnings of our success lie in the legendary Wieland Clamp, the first-ever safe electrical connector. Since then, innovation has pushed us to develop safer and more efficient ways to electrify the world.

Expanding from a component-only manufacturer, we are now one of the leading suppliers of innovative, future-oriented, and complete electrical solutions.

The focus here is on the “Installation Systems” and “Safety Automation” sectors. The Installation Systems sector focuses on decentralized energy distribution in modular construction, building automation, EV charging and lighting solutions. In the Safety Automation sector, the focus is on systems and services for the functional safety of machines in the mechanical engineering and wind power sectors.

We are at our customers’ side in every step of the project, right from the start. Our experts offer consulting, on-site services, and technical support. We see ourselves as service providers, trainers and subject-matter experts.



1910

Founded in
Bamberg



1700+

Employees
worldwide



70+

Countries
worldwide

CONTENT


RST® MICRO	Introduction – RST08 codings	4
	RST08i2 Plug connectors, device connectors, distributors, cable assemblies, 2-pole	6
	RST08i3 Plug connectors, device connectors, distributors, cable assemblies, 3-pole	12
	RST08i4 Plug connectors, device connectors, 4-pole	18
	RST08i5 Plug connectors, device connectors, 5-pole	20
	RST08 Accessories	22
RST® MINI	Introduction – RST16 codings	24
	RST16i2 Plug connectors, device connectors, distributors, cable assemblies, 2-pole	26
	RST16i3 Plug connectors, device connectors, distributors, cable assemblies, 3-pole	34
	RST16i4 Plug connectors, device connectors, distributors, cable assemblies, 4-pole	44
	RST16i5 Plug connectors, device connectors, distributors, cable assemblies, 5-pole	48
	RST16 Accessories	58
RST® CLASSIC	Introduction – RST20/25 codings	62
	RST20i2 Plug connectors, device connectors, distributors, cable assemblies, 2-pole	64
	RST20i3 Plug connectors, device connectors, distributors, cable assemblies, 3-pole	78
	RST20i4 Plug connectors, device connectors, distributors, cable assemblies, 4-pole	98
	RST20i5 Plug connectors, device connectors, distributors, cable assemblies, 5-pole	110
	RST20i6 Plug connectors, device connectors, 6-pole	126
	RST20i7 Plug connectors, device connectors, 7-pole	138
	RST25i3 Plug connectors, device connectors, cable assemblies, 3-pole	150
	RST25i5 Plug connectors, device connectors, cable assemblies, 5-pole	156
	RST20/25 Accessories	164
RST® CLASSIC ATEX	Introduction – RST20/25 codings	172
	RST20i2 Plug connectors, device connectors, distributors, 2-pole	174
	RST20i3 Plug connectors, device connectors, distributors, 3-pole	178
	RST20i4 Plug connectors, device connectors, distributors, 4-pole	184
	RST20i5 Plug connectors, device connectors, distributors, 5-pole	188
RST® POWER	Introduction – RST50 codings	192
	RST50i4 Plug connectors, device connectors, 4-pole	194
	RST50i5 Plug connectors, device connectors, 5-pole	196
	RST50 Accessories	198
Facts & Data	General notes + Technical data	200
Index		242
General information + contacts		259

Information regarding limits of use, notes, materials used can be found in Facts & Data.



RST® MICRO

The miniature connector for
LED lamps, signals and mains.

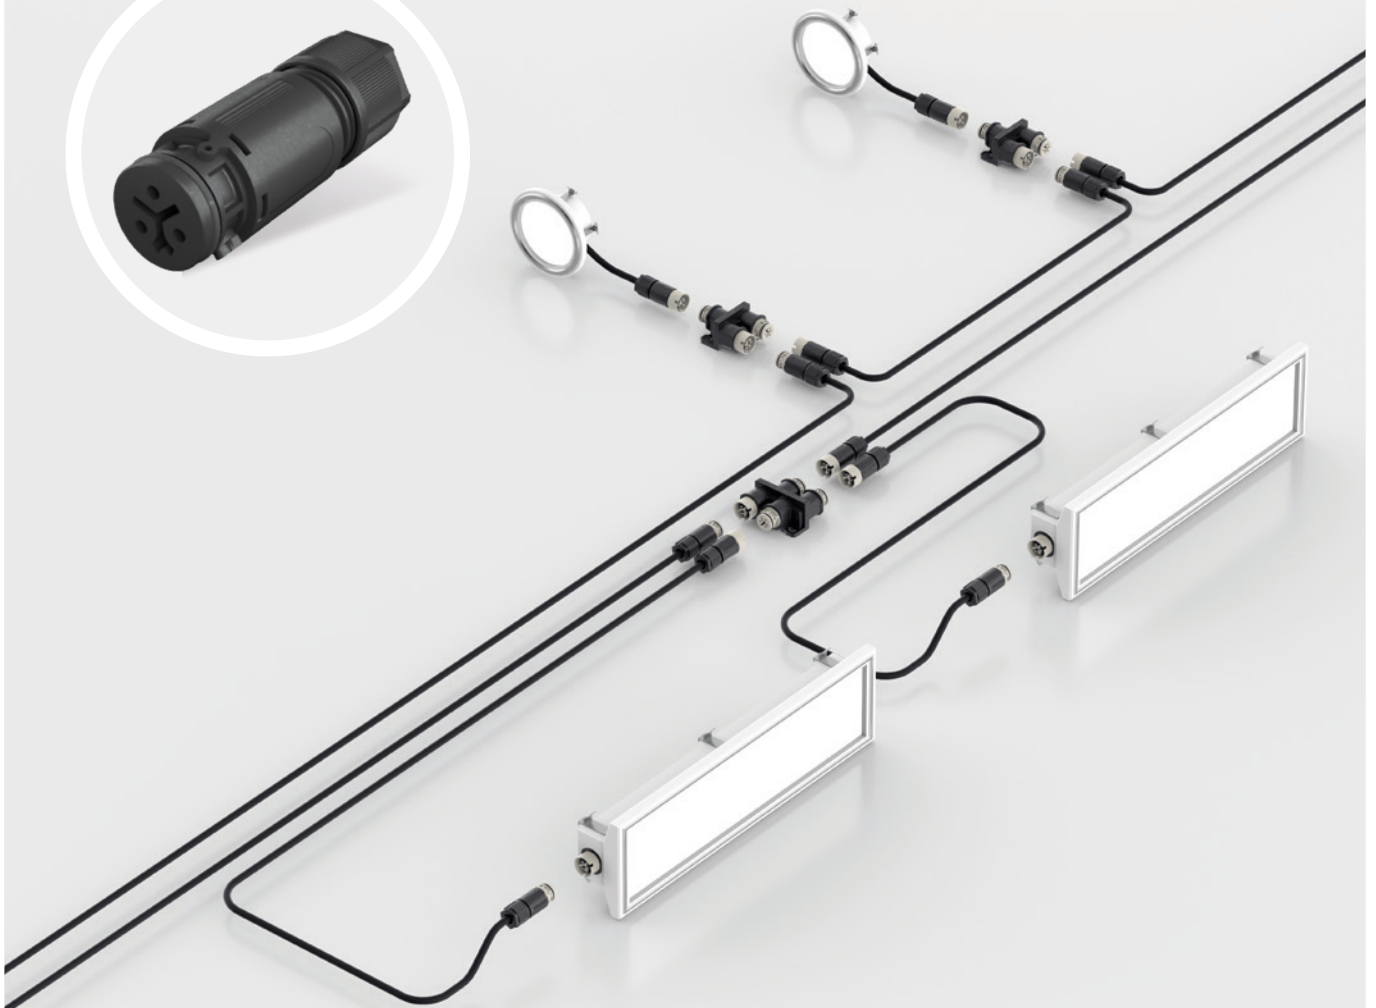

FEATURES

- + 2-pole to 5-pole
- + 8 A rated current
- + Optionally available in the barrier seal version (water stop)
- + Mechanical + color coding

RST08i2



Mechanical coding (view on connector interface female)	black	light blue	slate gray	pebble gray
Operating voltage (application)	250 V	250/400 V	~50/-120 V	~50/-120 V
Marking of poles	1, 2/N	1, 2/N	1, 2	1, 2

RST08i3



Mechanical coding (view on connector interface female)	black	light blue	slate gray	pebble gray
Operating voltage (application)	250 V with PE	250/400 V	~50/-120 V	~50/-120 V with PE
Marking of poles	1, PE, 2/N	1, 2/N, 3	1, 2, 3	1, 2, PE

RST08i4



Mechanical coding (view on connector interface female)	black	light blue	slate gray	pebble gray
Operating voltage (application)	250/400 V with PE	250/400 V	~50/-120 V	~50/-120 V with PE
Marking of poles	1, PE, 2/N, 3	1, 2/N, 3, 4	1, 2, 3, 4	1, 2/N, 3, 4, PE

RST08i5



Mechanical coding (view on connector interface female)	black	light blue	slate gray	pebble gray
Operating voltage (application)	250/400 V with PE	250/400 V	~50/-120 V	~50/-120 V with PE
Marking of poles	1, 2/N, 3, 4, PE	1, 2/N, 3, 4, 5	1, 2, 3, 4, 5	1, 2, 3, 4, PE

RST08I2, CONNECTOR, 2-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	8 A	Cross section fine-stranded: 0,22 mm ² - 1 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 0,2 mm ² - 1 mm ²
Lockable:	self-locking (unlocking by hand)	solid:
		Additional technical data, see facts & data.

female



male



straight, for cables Ø 4-7 mm, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V	1, 2/N	4L.021.3043.1	4L.022.3043.1
■ light blue	250/400 V	1, 2/N	4L.021.3043.9	4L.022.3043.9
■ pebble grey	~50/-120 V	1, 2	4L.021.3041.8	4L.022.3041.8
■ slate grey	~50/-120 V	1, 2	4L.021.3041.4	4L.022.3041.4

female



male



straight, for cables Ø 4-7 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V	1, 2/N	41.021.3043.1	41.022.3043.1
■ light blue	250/400 V	1, 2/N	41.021.3043.9	41.022.3043.9
■ pebble grey	~50/-120 V	1, 2	41.021.3041.8	41.022.3041.8
■ slate grey	~50/-120 V	1, 2	41.021.3041.4	41.022.3041.4

RST08I2, DEVICE CONNECTOR, M14, 2-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	8 A	Cross section fine-stranded:	0,22 mm ² - 1 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:	
Terminations per pole:	1	Connection cross section	0,2 mm ² - 1 mm ²
Lockable:	self-locking (unlocking by hand)	solid:	
		Additional technical data, see facts & data.	

female



male



standard, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V	1, 2/N	4L.021.4043.1	4L.022.4043.1
■ light blue	250/400 V	1, 2/N	4L.021.4043.9	4L.022.4043.9
■ pebble grey	~50/-120 V	1, 2	4L.021.4041.8	4L.022.4041.8
■ slate grey	~50/-120 V	1, 2	4L.021.4041.4	4L.022.4041.4

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V	1, 2/N	41.021.4043.1	41.022.4043.1
■ light blue	250/400 V	1, 2/N	41.021.4043.9	41.022.4043.9
■ pebble grey	~50/-120 V	1, 2	41.021.4041.8	41.022.4041.8
■ slate grey	~50/-120 V	1, 2	41.021.4041.4	41.022.4041.4

RST08I2, DISTRIBUTOR, 2-POLE



TECHNICAL DATA

Rated current:	8 A	Lockable:	self-locking (unlocking by hand)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	

distribution block 1I / 2O, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V	1, 2/N	4L.020.1143.1
■ light blue	250/400 V	1, 2/N	4L.020.1143.9
■ slate grey	~50/-120 V	1, 2	4L.020.1141.4

distribution block 1I / 2O, series connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ pebble grey	~50/-120 V	1, 2	4L.020.1241.8

distribution block 1I / 3O, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V	1, 2/N	4L.020.0143.1
■ light blue	250/400 V	1, 2/N	4L.020.0143.9
■ slate grey	~50/-120 V	1, 2	4L.020.0141.4

distribution block 1I / 3O, series connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ pebble grey	~50/-120 V	1, 2	4L.020.0241.8

RST08I2, CABLE ASSEMBLY, 2-POLE

0.75 mm², 6 A



TECHNICAL DATA

Rated current:	6 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by hand)		

connecting cable, female - male

H05RN-F halogenated

Cable color:
Color of coding: ■ black
Application: 250/400 V
Marking of poles: 1, 2/N
with longitudinal sealing

Cable color:
Color of coding: ■ black
Application: 250/400 V
Marking of poles: 1, 2/N

Cable color:
Color of coding: ■ light blue
Application: 250/400 V
Marking of poles: 1, 2/N
with longitudinal sealing

Cable color:
Color of coding: ■ light blue
Application: 250/400 V
Marking of poles: 1, 2/N

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V
Marking of poles: 1, 2
with longitudinal sealing

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V
Marking of poles: 1, 2

Cable color:
Color of coding: ■ slate grey
Application: ~50/-120 V
Marking of poles: 1, 2
with longitudinal sealing

Cable color:
Color of coding: ■ slate grey
Application: ~50/-120 V
Marking of poles: 1, 2

Length (m)	Art.No.
	■ black
0.5	4L.427.0530.1
1	4L.427.1030.1
1.5	4L.427.1530.1
2	4L.427.2030.1
2.5	4L.427.2530.1
3	4L.427.3030.1
4	4L.427.4030.1
	■ black
0.5	41.427.0530.1
1	41.427.1030.1
1.5	41.427.1530.1
2	41.427.2030.1
2.5	41.427.2530.1
3	41.427.3030.1
4	41.427.4030.1
	■ black
0.5	4L.427.0530.9
1	4L.427.1030.9
1.5	4L.427.1530.9
2	4L.427.2030.9
2.5	4L.427.2530.9
3	4L.427.3030.9
4	4L.427.4030.9
	■ black
0.5	41.427.0530.9
1	41.427.1030.9
1.5	41.427.1530.9
2	41.427.2030.9
2.5	41.427.2530.9
3	41.427.3030.9
4	41.427.4030.9
	■ black
0.5	4L.427.0532.8
1	4L.427.1032.8
1.5	4L.427.1532.8
2	4L.427.2032.8
2.5	4L.427.2532.8
3	4L.427.3032.8
4	4L.427.4032.8
	■ black
0.5	41.427.0532.8
1	41.427.1032.8
1.5	41.427.1532.8
2	41.427.2032.8
2.5	41.427.2532.8
3	41.427.3032.8
4	41.427.4032.8
	■ black
0.5	4L.427.0532.4
1	4L.427.1032.4
1.5	4L.427.1532.4
2	4L.427.2032.4
2.5	4L.427.2532.4
3	4L.427.3032.4
4	4L.427.4032.4
	■ black
0.5	41.427.0532.4
1	41.427.1032.4
1.5	41.427.1532.4
2	41.427.2032.4
2.5	41.427.2532.4
3	41.427.3032.4
4	41.427.4032.4

RST08I2, CABLE ASSEMBLY, 2-POLE

0.75 mm², 6 A



TECHNICAL DATA

Rated current:	6 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, female - free end

H05RN-F halogenated

Cable color:
Color of coding: ■ black
Application: 250/400 V
Marking of poles: 1, 2/N
with longitudinal sealing

Cable color:
Color of coding: ■ black
Application: 250/400 V
Marking of poles: 1, 2/N

Cable color:
Color of coding: ■ light blue
Application: 250/400 V
Marking of poles: 1, 2/N
with longitudinal sealing

Cable color:
Color of coding: ■ light blue
Application: 250/400 V
Marking of poles: 1, 2/N

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V
Marking of poles: 1, 2
with longitudinal sealing

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V
Marking of poles: 1, 2

Cable color:
Color of coding: ■ slate grey
Application: ~50/-120 V
Marking of poles: 1, 2
with longitudinal sealing

Cable color:
Color of coding: ■ slate grey
Application: ~50/-120 V
Marking of poles: 1, 2

Length (m)	Art.No.
	■ black
0.5	4L.427.0533.1
1	4L.427.1033.1
1.5	4L.427.1533.1
2	4L.427.2033.1
2.5	4L.427.2533.1
3	4L.427.3033.1
4	4L.427.4033.1
	■ black
0.5	41.427.0533.1
1	41.427.1033.1
1.5	41.427.1533.1
2	41.427.2033.1
2.5	41.427.2533.1
3	41.427.3033.1
4	41.427.4033.1
	■ black
0.5	41.427.0533.9
1	41.427.1033.9
1.5	41.427.1533.9
2	41.427.2033.9
2.5	41.427.2533.9
3	41.427.3033.9
4	41.427.4033.9
	■ black
1	41.427.1033.9
1.5	41.427.1533.9
2	41.427.2033.9
2.5	41.427.2533.9
3	41.427.3033.9
4	41.427.4033.9
	■ black
0.5	4L.427.0537.8
1	4L.427.1037.8
1.5	4L.427.1537.8
2	4L.427.2037.8
2.5	4L.427.2537.8
3	4L.427.3037.8
4	4L.427.4037.8
	■ black
0.5	41.427.0537.8
1	41.427.1037.8
1.5	41.427.1537.8
2	41.427.2037.8
2.5	41.427.2537.8
3	41.427.3037.8
4	41.427.4037.8
	■ black
0.5	4L.427.0537.4
1	4L.427.1037.4
1.5	4L.427.1537.4
2	4L.427.2037.4
2.5	4L.427.2537.4
3	4L.427.3037.4
4	4L.427.4037.4
	■ black
0.5	41.427.0537.4
1	41.427.1037.4
1.5	41.427.1537.4
2	41.427.2037.4
2.5	41.427.2537.4
3	41.427.3037.4
4	41.427.4037.4

RST08I2, CABLE ASSEMBLY, 2-POLE

0.75 mm², 6 A



TECHNICAL DATA

Rated current:	6 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, male - free end

H05RN-F halogenated

Cable color:
Color of coding: ■ black
Application: 250/400 V
Marking of poles: 1, 2/N
with longitudinal sealing

Cable color:
Color of coding: ■ black
Application: 250/400 V
Marking of poles: 1, 2/N

Cable color:
Color of coding: ■ light blue
Application: 250/400 V
Marking of poles: 1, 2/N
with longitudinal sealing

Cable color:
Color of coding: ■ light blue
Application: 250/400 V
Marking of poles: 1, 2/N

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V
Marking of poles: 1, 2
with longitudinal sealing

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V
Marking of poles: 1, 2

Cable color:
Color of coding: ■ slate grey
Application: ~50/-120 V
Marking of poles: 1, 2
with longitudinal sealing

Cable color:
Color of coding: ■ slate grey
Application: ~50/-120 V
Marking of poles: 1, 2

Length (m)	Art.No.
	■ black
0.5	4L.427.0534.1
1	4L.427.1034.1
1.5	4L.427.1534.1
2	4L.427.2034.1
2.5	4L.427.2534.1
3	4L.427.3034.1
4	4L.427.4034.1
	■ black
0.5	41.427.0534.1
1	41.427.1034.1
1.5	41.427.1534.1
2	41.427.2034.1
2.5	41.427.2534.1
3	41.427.3034.1
4	41.427.4034.1
	■ black
0.5	4L.427.0534.9
1	4L.427.1034.9
1.5	4L.427.1534.9
2	4L.427.2034.9
2.5	4L.427.2534.9
3	4L.427.3034.9
4	4L.427.4034.9
	■ black
0.5	41.427.0534.9
1	41.427.1034.9
1.5	41.427.1534.9
2	41.427.2034.9
2.5	41.427.2534.9
3	41.427.3034.9
4	41.427.4034.9
	■ black
0.5	4L.427.0538.8
1	4L.427.1038.8
1.5	4L.427.1538.8
2	4L.427.2038.8
2.5	4L.427.2538.8
3	4L.427.3038.8
4	4L.427.4038.8
	■ black
0.5	41.427.0538.8
1	41.427.1038.8
1.5	41.427.1538.8
2	41.427.2038.8
2.5	41.427.2538.8
3	41.427.3038.8
4	41.427.4038.8
	■ black
0.5	4L.427.0538.4
1	4L.427.1038.4
1.5	4L.427.1538.4
2	4L.427.2038.4
2.5	4L.427.2538.4
3	4L.427.3038.4
4	4L.427.4038.4
	■ black
0.5	41.427.0538.4
1	41.427.1038.4
1.5	41.427.1538.4
2	41.427.2038.4
2.5	41.427.2538.4
3	41.427.3038.4
4	41.427.4038.4

RST08I3, CONNECTOR, 3-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	8 A	Cross section fine-stranded:	0,22 mm ² - 1 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 1 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by hand)		

female



male



straight, for cables Ø 4-7 mm, with longitudinal sealing

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, PE, 2/N	4L.031.3053.1	4L.032.3053.1
■ light blue	250/400 V	1, 2/N, 3	4L.031.3043.9	4L.032.3043.9
■ pebble grey	~50/-120 V with PE	1, 2, PE	4L.031.3051.8	4L.032.3051.8
■ slate grey	~50/-120 V	1, 2, 3	4L.031.3041.4	4L.032.3041.4

female



male



straight, for cables Ø 4-7 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, PE, 2/N	41.031.3053.1	41.032.3053.1
■ light blue	250/400 V	1, 2/N, 3	41.031.3043.9	41.032.3043.9
■ pebble grey	~50/-120 V with PE	1, 2, PE	41.031.3051.8	41.032.3051.8
■ slate grey	~50/-120 V	1, 2, 3	41.031.3041.4	41.032.3041.4

RST08I3, DEVICE CONNECTOR, M14, 3-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	8 A	Cross section fine-stranded:	0,22 mm ² - 1 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:	
Terminations per pole:	1	Connection cross section	0,2 mm ² - 1 mm ²
Lockable:	self-locking (unlocking by hand)	solid:	
		Additional technical data,	see facts & data.

female

male



standard, straight, with longitudinal sealing

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, PE, 2/N	4L.031.4053.1	4L.032.4053.1
■ light blue	250/400 V	1, 2/N, 3	4L.031.4043.9	4L.032.4043.9
■ pebble grey	~50/-120 V with PE	1, 2, PE	4L.031.4051.8	4L.032.4051.8
■ slate grey	~50/-120 V	1, 2, 3	4L.031.4041.4	4L.032.4041.4

female

male



standard, straight

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, PE, 2/N	41.031.4053.1	41.032.4053.1
■ light blue	250/400 V	1, 2/N, 3	41.031.4043.9	41.032.4043.9
■ pebble grey	~50/-120 V with PE	1, 2, PE	41.031.4051.8	41.032.4051.8
■ slate grey	~50/-120 V	1, 2, 3	41.031.4041.4	41.032.4041.4

RST08I3, DISTRIBUTOR, 3-POLE

TECHNICAL DATA

Rated current:	8 A	Lockable:	self-locking (unlocking by hand)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	



distribution block 1I / 20, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, PE, 2/N	4L.030.1153.1
■ light blue	250/400 V	1, 2/N, 3	4L.030.1143.9
■ slate grey	~50/-120 V	1, 2, 3	4L.030.1141.4



distribution block 1I / 20, series connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ pebble grey	~50/-120 V with PE	1, 2, PE	4L.030.1351.8



distribution block 1I / 30, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, PE, 2/N	4L.030.0153.1
■ light blue	250/400 V	1, 2/N, 3	4L.030.0143.9
■ slate grey	~50/-120 V	1, 2, 3	4L.030.0141.4



distribution block 1I / 30, series connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ pebble grey	~50/-120 V with PE	1, 2, PE	4L.030.0351.8

RST08I3, CABLE ASSEMBLY, 3-POLE

0.75 mm²



TECHNICAL DATA

Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connecting cable, female - male

**H05RN-F
halogenated**

Cable color:
Color of coding: ■ black
Application: 250/400 V with PE
Marking of poles: 1, PE, 2/N
with longitudinal sealing

Length (m)	Art.No.
	■ black
0.5	4L.437.0530.1
1	4L.437.1030.1
1.5	4L.437.1530.1
2	4L.437.2030.1
2.5	4L.437.2530.1
3	4L.437.3030.1
4	4L.437.4030.1
	■ black
0.5	41.437.0530.1
1	41.437.1030.1
1.5	41.437.1530.1
2	41.437.2030.1
2.5	41.437.2530.1
3	41.437.3030.1
4	41.437.4030.1
	■ black
0.5	4L.437.0532.8
1	4L.437.1032.8
1.5	4L.437.1532.8
2	4L.437.2032.8
2.5	4L.437.2532.8
3	4L.437.3032.8
4	4L.437.4032.8
	■ black
0.5	41.437.0532.8
1	41.437.1032.8
1.5	41.437.1532.8
2	41.437.2032.8
2.5	41.437.2532.8
3	41.437.3032.8
4	41.437.4032.8

Cable color:
Color of coding: ■ black
Application: 250/400 V with PE
Marking of poles: 1, PE, 2/N

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V with PE
Marking of poles: with longitudinal sealing

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V with PE
Marking of poles: 1, 2, PE

RST08I3, CABLE ASSEMBLY, 3-POLE

0.75 mm², 6 A



TECHNICAL DATA

Rated current:	6 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, female - free end

H05RN-F halogenated

Cable color:
Color of coding: ■ black
Application: 250/400 V with PE
Marking of poles: 1, PE, 2/N
with longitudinal sealing

Length (m)	Art.No.
	■ black
0.5	4L.437.0533.1
1	4L.437.1033.1
1.5	4L.437.1533.1
2	4L.437.2033.1
2.5	4L.437.2533.1
3	4L.437.3033.1
4	4L.437.4033.1
	■ black
0.5	41.437.0533.1
1	41.437.1033.1
1.5	41.437.1533.1
2	41.437.2033.1
2.5	41.437.2533.1
3	41.437.3033.1
4	41.437.4033.1
	■ black
0.5	4L.437.0537.8
1	4L.437.1037.8
1.5	4L.437.1537.8
2	4L.437.2037.8
2.5	4L.437.2537.8
3	4L.437.3037.8
4	4L.437.4037.8
	■ black
0.5	41.437.0537.8
1	41.437.1037.8
1.5	41.437.1537.8
2	41.437.2037.8
2.5	41.437.2537.8
3	41.437.3037.8
4	41.437.4037.8

Cable color:
Color of coding: ■ black
Application: 250/400 V with PE
Marking of poles: 1, PE, 2/N

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V with PE
Marking of poles: 1, 2, PE
with longitudinal sealing

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V with PE
Marking of poles: 1, 2, PE

RST08I3, CABLE ASSEMBLY, 3-POLE

0.75 mm², 6 A



TECHNICAL DATA

Rated current:	6 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, male - free end

**H05RN-F
halogenated**

Cable color:
Color of coding: ■ black
Application: 250/400 V with PE
Marking of poles: 1, PE, 2/N
with longitudinal sealing

Length (m)	Art.No.
	■ black
0.5	4L.437.0534.1
1	4L.437.1034.1
1.5	4L.437.1534.1
2	4L.437.2034.1
2.5	4L.437.2534.1
3	4L.437.3034.1
4	4L.437.4034.1
	■ black
0.5	41.437.0534.1
1	41.437.1034.1
1.5	41.437.1534.1
2	41.437.2034.1
2.5	41.437.2534.1
3	41.437.3034.1
4	41.437.4034.1
	■ black
0.5	4L.437.0538.8
1	4L.437.1038.8
1.5	4L.437.1538.8
2	4L.437.2038.8
2.5	4L.437.2538.8
3	4L.437.3038.8
4	4L.437.4038.8
	■ black
0.5	41.437.0538.8
1	41.437.1038.8
1.5	41.437.1538.8
2	41.437.2038.8
2.5	41.437.2538.8
3	41.437.3038.8
4	41.437.4038.8

Cable color:
Color of coding: ■ black
Application: 250/400 V with PE
Marking of poles: 1, PE, 2/N

Cable color:
Color of coding: ■ pebble grey
Application: ~50/~120 V with PE
Marking of poles: 1, 2, PE
with longitudinal sealing

Cable color:
Color of coding: ■ pebble grey
Application: ~50/~120 V with PE
Marking of poles: 1, 2, PE

RST08I4, CONNECTOR, 4-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	8 A	Cross section fine-stranded:	0,22 mm ² - 1 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 1 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by hand)		

female

male



pluggable, straight, for cables Ø 5-10.6 mm, with longitudinal sealing

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, PE, 2/N, 3	4L.041.3053.1	4L.042.3053.1
■ light blue	250/400 V	1, 2/N, 3, 4	4L.041.3043.9	4L.042.3043.9
■ pebble grey	~50/-120 V	1, 2, 3, 4	4L.041.3041.8	4L.042.3041.8
■ slate grey	~50/-120 V	1, 2, 3, 4	4L.041.3041.4	4L.042.3041.4

female

male



pluggable, straight, for cables Ø 5-10.6 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, PE, 2/N, 3	41.041.3053.1	41.042.3053.1
■ light blue	250/400 V	1, 2/N, 3, 4	41.041.3043.9	41.042.3043.9
■ pebble grey	~50/-120 V	1, 2, 3, 4	41.041.3041.8	41.042.3041.8
■ slate grey	~50/-120 V	1, 2, 3, 4	41.041.3041.4	41.042.3041.4

female

male



pluggable, straight, for cables Ø 5-6.5 mm, with longitudinal sealing

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, PE, 2/N, 3	4L.041.3153.1	4L.042.3153.1
■ light blue	250/400 V	1, 2/N, 3, 4	4L.041.3143.9	4L.042.3143.9
■ pebble grey	~50/-120 V	1, 2, 3, 4	4L.041.3141.8	4L.042.3141.8
■ slate grey	~50/-120 V	1, 2, 3, 4	4L.041.3141.4	4L.042.3141.4

female

male



pluggable, straight, for cables Ø 5-6.5 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, PE, 2/N, 3	41.041.3153.1	41.042.3153.1
■ light blue	250/400 V	1, 2/N, 3, 4	41.041.3143.9	41.042.3143.9
■ pebble grey	~50/-120 V	1, 2, 3, 4	41.041.3141.8	41.042.3141.8
■ slate grey	~50/-120 V	1, 2, 3, 4	41.041.3141.4	41.042.3141.4

RST08I4, DEVICE CONNECTOR, M16,6, 4-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	8 A	Cross section fine-stran-	0,22 mm ² - 1 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:	
Terminations per pole:	1	Connection cross section	0,2 mm ² - 1 mm ²
Lockable:	self-locking (unlocking by hand)	solid:	
		Additional technical data, see facts & data.	

female



male



standard, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, PE, 2/N, 3	4L.041.4053.1	4L.042.4053.1
■ light blue	250/400 V	1, 2/N, 3, 4	4L.041.4043.9	4L.042.4043.9
■ pebble grey	~50/-120 V	1, 2, 3, 4	4L.041.4041.8	4L.042.4041.8
■ slate grey	~50/-120 V	1, 2, 3, 4	4L.041.4041.4	4L.042.4041.4

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, PE, 2/N, 3	41.041.4053.1	41.042.4053.1
■ light blue	250/400 V	1, 2/N, 3, 4	41.041.4043.9	41.042.4043.9
■ pebble grey	~50/-120 V	1, 2, 3, 4	41.041.4041.8	41.042.4041.8
■ slate grey	~50/-120 V	1, 2, 3, 4	41.041.4041.4	41.042.4041.4

RST08I5, CONNECTOR, 5-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	8 A	Cross section fine-stranded:	0,22 mm ² - 1 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 1 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by hand)		

female



male



straight, for cables Ø 5-10.6 mm, with longitudinal sealing

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2/N, 3, 4, PE	4L.051.3053.1	4L.052.3053.1
■ light blue	250/400 V	1, 2/N, 3, 4, 5	4L.051.3043.9	4L.052.3043.9
■ pebble grey	~50/-120 V with PE	1, 2, 3, 4, PE	4L.051.3051.8	4L.052.3051.8
■ slate grey	~50/-120 V	1, 2, 3, 4, 5	4L.051.3041.4	4L.052.3041.4

female



male



straight, for cables Ø 5-10.6 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2/N, 3, 4, PE	41.051.3053.1	41.052.3053.1
■ light blue	250/400 V	1, 2/N, 3, 4, 5	41.051.3043.9	41.052.3043.9
■ pebble grey	~50/-120 V with PE	1, 2, 3, 4, PE	41.051.3051.8	41.052.3051.8
■ slate grey	~50/-120 V	1, 2, 3, 4, 5	41.051.3041.4	41.052.3041.4

female



male



straight, for cables Ø 5-6.5 mm, with longitudinal sealing

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2/N, 3, 4, PE	4L.051.3153.1	4L.052.3153.1
■ light blue	250/400 V	1, 2/N, 3, 4, 5	4L.051.3143.9	4L.052.3143.9
■ pebble grey	~50/-120 V with PE	1, 2, 3, 4, PE	4L.051.3151.8	4L.052.3151.8
■ slate grey	~50/-120 V	1, 2, 3, 4, 5	4L.051.3141.4	4L.052.3141.4

female



male



straight, for cables Ø 5-6.5 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2/N, 3, 4, PE	41.051.3153.1	41.052.3153.1
■ light blue	250/400 V	1, 2/N, 3, 4, 5	41.051.3143.9	41.052.3143.9
■ pebble grey	~50/-120 V with PE	1, 2, 3, 4, PE	41.051.3151.8	41.052.3151.8
■ slate grey	~50/-120 V	1, 2, 3, 4, 5	41.051.3141.4	41.052.3141.4

RST08I5, DEVICE CONNECTOR, M16,6, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	8 A	Cross section fine-stran- 0,22 mm² - 1 mm²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 0,2 mm² - 1 mm²
Lockable:	self-locking (unlocking by hand)	solid:
		Additional technical data, see facts & data.

female



male



standard, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2/N, 3, 4, PE	4L.051.4053.1	4L.052.4053.1
■ light blue	250/400 V	1, 2/N, 3, 4, 5	4L.051.4043.9	4L.052.4043.9
■ pebble grey	~50/-120 V with PE	1, 2, 3, 4, PE	4L.051.4051.8	4L.052.4051.8
■ slate grey	~50/-120 V	1, 2, 3, 4, 5	4L.051.4041.4	4L.052.4041.4

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2/N, 3, 4, PE	41.051.4053.1	41.052.4053.1
■ light blue	250/400 V	1, 2/N, 3, 4, 5	41.051.4043.9	41.052.4043.9
■ pebble grey	~50/-120 V with PE	1, 2, 3, 4, PE	41.051.4051.8	41.052.4051.8
■ slate grey	~50/-120 V	1, 2, 3, 4, 5	41.051.4041.4	41.052.4041.4

RST08, ACCESSORIES



cover piece for 2-/3-pole, captive against loss, for female

Color	Art.No.
■ black	06.563.5053.1



cover piece for 2-/3-pole, captive against loss, for male

Color	Art.No.
■ black	06.563.5153.1



cover piece for 4-/5-pole, captive against loss, for female

Color	Art.No.
■ black	06.564.1553.1



cover piece for 4-/5-pole, captive against loss, for male

Color	Art.No.
■ black	06.564.1653.1



screwdriver

Art.No.
06.502.6300.0



allen key


Art.No.
06.502.6100.0

sample case, RST08i3

Art.No.
99.436.0000.1

RST® MINI

The small connectors
for extremely confined spaces.

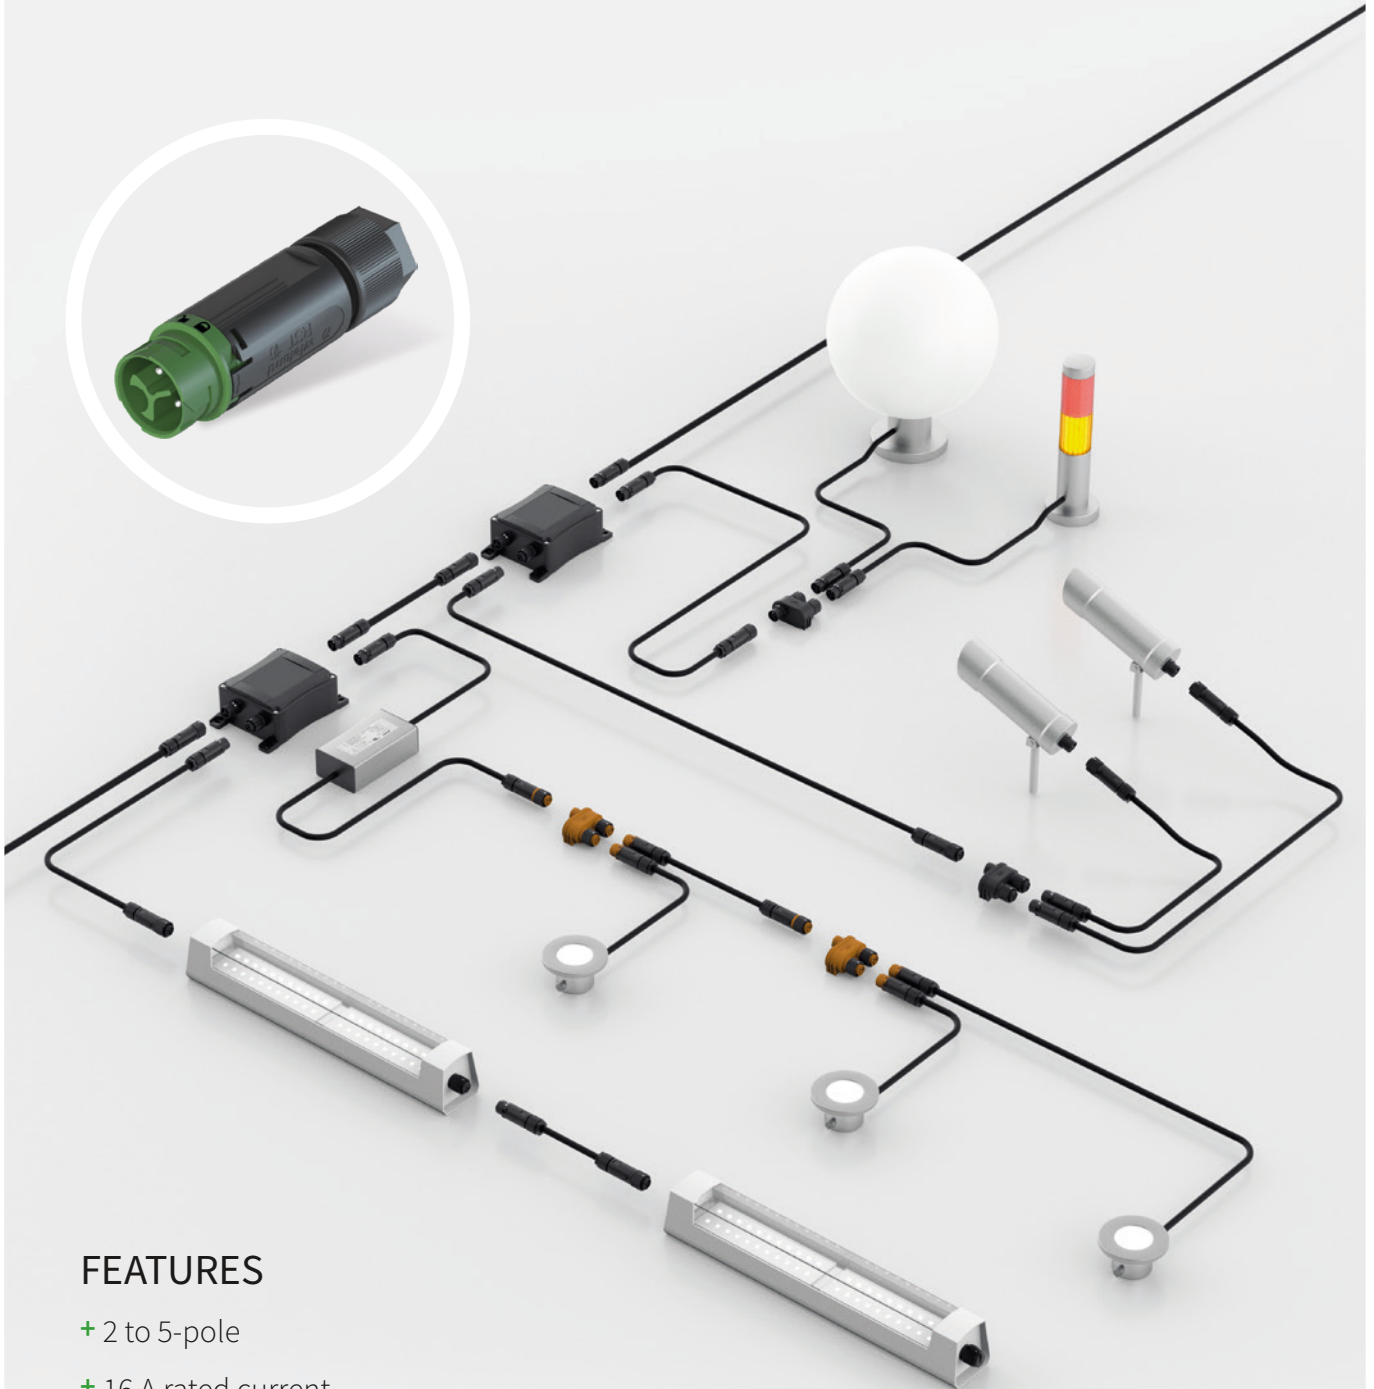

FEATURES

- + 2 to 5-pole
- + 16 A rated current
- + Mechanical + color coding

RST16i2



Mechanical coding (view on connector interface female)	black	light gray	leaf green	light blue	turquoise	signal brown
Operating voltage (application)	250 V	250 V	250/400 V	250/400 V	250/400 V	~50/-120 V
Marking of poles	L, N	L, N	1, 2	1, 2	D1, D2	1, 2

RST16i3



Mechanical coding (view on connector interface female)	black	light gray	leaf green	light blue	turquoise	signal brown
Operating voltage (application)	250 V with PE	250 V with PE	250/400 V with PE	250/400 V	250/400 V with PE	~50/-120 V
Marking of poles	L, N, PE	L, N, PE	1, 2, PE	1, 2, 3	D1, D2, PE	1, 2, 3

RST16i4



Mechanical coding (view on connector interface female)	black	light gray	signal brown
Operating voltage (application)	250/400 V with PE	250/400 V with PE	~50/-120 V
Marking of poles	1, 2, 3, PE	1, 2, 3, PE	1, 2, 3, 4

RST16i5



Mechanical coding (view on connector interface female)	black	light gray	turquoise	light blue	signal brown
Operating voltage (application)	250/400 V with PE	250/400 V with PE	250 V with PE	250/400 V with PE	~50/-120 V
Marking of poles	1, 2, 3, N, PE	1, 2, 3, N, PE	L, N, PE, 1, 2	1, 2, 3, 4, 5	1, 2, 3, 4, 5

RST16I2, CONNECTOR, 2-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	16 A	Cross section fine-stranded:	0,25 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,25 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by hand)		

female

male



straight, for cables Ø 5-9.5 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	46.031.4554.1	46.032.4554.1
□ light grey	250 V	L, N	46.031.4554.0	46.032.4554.0
■ leaves green	250/400 V	1, 2	46.031.4556.7	46.032.4556.7
■ light blue	250/400 V	1, 2	46.031.4554.9	46.032.4554.9
■ turquoise blue	250/400 V	D1, D2	46.031.4551.6	46.032.4551.6
■ signal brown	~50/-120 V	1, 2	46.031.4551.4	46.032.4551.4

female

male



straight, for cables Ø 7.1-13 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	46.031.4454.1	46.032.4454.1
□ light grey	250 V	L, N	46.031.4454.0	46.032.4454.0
■ leaves green	250/400 V	1, 2	46.031.4456.7	46.032.4456.7
■ light blue	250/400 V	1, 2	46.031.4454.9	46.032.4454.9
■ turquoise blue	250/400 V	D1, D2	46.031.4451.6	46.032.4451.6
■ signal brown	~50/-120 V	1, 2	46.031.4451.4	46.032.4451.4

female

male



straight, for AS-i profile cable

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ turquoise blue	250/400 V	D1, D2	46.031.4951.6	46.032.4951.6
■ signal brown	~50/-120 V	1, 2	46.031.4951.4	46.032.4951.4

RST16I2, DEVICE CONNECTOR, M16, 2-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	16 A	Cross section fine-stran-
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section
Lockable:	self-locking (unlocking by hand)	solid: 0,25 mm ² - 2,5 mm ²
		Additional technical data, see facts & data.

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	46.031.5054.1	46.032.5054.1
□ light grey	250 V	L, N	46.031.5054.0	46.032.5054.0
■ leaves green	250/400 V	1, 2	46.031.5056.7	46.032.5056.7
■ light blue	250/400 V	1, 2	46.031.5054.9	46.032.5054.9
■ turquoise blue	250/400 V	D1, D2	46.031.5051.6	46.032.5051.6
■ signal brown	~50/-120 V	1, 2	46.031.5051.4	46.032.5051.4

RST16I2, DEVICE CONNECTOR, M20, 2-POLE

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	16 A	Cross section fine-stranded: 0,5 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 0,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by hand)	solid:
		Additional technical data, see facts & data.

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	46.031.M0L1.1	46.032.M0L1.1
□ light grey	250 V	L, N	46.031.M0L1.0	46.032.M0L1.0
■ light blue	250/400 V	1, 2	46.031.M0L1.9	46.032.M0L1.9
■ turquoise blue	250/400 V	D1, D2	46.031.M0L1.6	46.032.M0L1.6
■ signal brown	~50/-120 V	1, 2	46.031.M0L1.4	46.032.M0L1.4

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	46.031.M054.1	46.032.M054.1
□ light grey	250 V	L, N	46.031.M054.0	46.032.M054.0
■ light blue	250/400 V	1, 2	46.031.M054.9	46.032.M054.9
■ turquoise blue	250/400 V	D1, D2	46.031.M051.6	46.032.M051.6
■ signal brown	~50/-120 V	1, 2	46.031.M051.4	46.032.M051.4

RST16I2, DISTRIBUTOR, 2-POLE

TECHNICAL DATA

Rated current:	16 A	Lockable:	self-locking (unlocking by hand)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	



distribution block 1I / 2O, series connection, with fastening option to 06.562.5853.1

Color of coding	Application	Marking of poles	Art.No.
■ leaves green	250/400 V	1, 2	46.030.1354.7
■ signal brown	~50/-120 V	1, 2	46.030.1354.4



distribution block 1I / 2O, parallel connection, with fastening option to 06.562.5853.0 / 06.562.5853.1

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V	L, N	46.030.1254.1
□ light grey	250 V	L, N	46.030.1254.0
■ light blue	250/400 V	1, 2	46.030.1254.9
■ turquoise blue	250/400 V	D1, D2	46.030.1251.6
■ signal brown	~50/-120 V	1, 2	46.030.1251.4



compact distributor 1I / 3O, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V	L, N	46.030.0154.1
□ light grey	250 V	L, N	46.030.0154.0
■ light blue	250/400 V	1, 2	46.030.0154.9
■ turquoise blue	250/400 V	D1, D2	46.030.0151.6
■ signal brown	~50/-120 V	1, 2	46.030.0151.4

RST16I2, CABLE ASSEMBLY, 2-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by hand)		

connecting cable, female - male

Cable color:	
Color of coding:	■ black
Application:	250 V
Marking of poles:	L, N

Cable color:	
Color of coding:	■ signal brown
Application:	~50/-120 V
Marking of poles:	1, 2

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	46.422.1030.1	46.422.1000.1
2	46.422.2030.1	46.422.2000.1
3	46.422.3030.1	46.422.3000.1
4	46.422.4030.1	46.422.4000.1
5	46.422.5030.1	46.422.5000.1
	■ black	■ black
1	46.422.1032.4	46.422.1002.4
2	46.422.2032.4	46.422.2002.4
3	46.422.3032.4	46.422.3002.4
4	46.422.4032.4	46.422.4002.4
5	46.422.5032.4	46.422.5002.4



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color:	
Color of coding:	■ black
Application:	250 V
Marking of poles:	L, N

Cable color:	
Color of coding:	■ signal brown
Application:	~50/-120 V
Marking of poles:	1, 2

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	46.422.1033.1	46.422.1003.1
2	46.422.2033.1	46.422.2003.1
3	46.422.3033.1	46.422.3003.1
4	46.422.4033.1	46.422.4003.1
5	46.422.5033.1	46.422.5003.1
	■ black	■ black
1	46.422.1037.4	46.422.1007.4
2	46.422.2037.4	46.422.2007.4
3	46.422.3037.4	46.422.3007.4
4	46.422.4037.4	46.422.4007.4
5	46.422.5037.4	46.422.5007.4

RST16I2, CABLE ASSEMBLY, 2-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor	ultrasonically compressed
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ends:	wire ends
Lockable:	self-locking (unlocking by hand)	type of construction:	Cable screw gland
Additional technical data, see facts & data.			

connection cable, male - free end

Cable color:	
Color of coding:	■ black
Application:	250 V
Marking of poles:	L, N
Cable color:	
Color of coding:	■ signal brown
Application:	~50/-120 V
Marking of poles:	1, 2

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	46.422.1034.1	46.422.1004.1
2	46.422.2034.1	46.422.2004.1
3	46.422.3034.1	46.422.3004.1
4	46.422.4034.1	46.422.4004.1
5	46.422.5034.1	46.422.5004.1
	■ black	■ black
0.5	46.422.0538.4	46.422.0508.4
1	46.422.1038.4	46.422.1008.4
2	46.422.2038.4	46.422.2008.4
3	46.422.3038.4	46.422.3008.4
4	46.422.4038.4	46.422.4008.4
5	46.422.5038.4	46.422.5008.4

RST® MINI

RST16I2, CABLE ASSEMBLY, 2-POLE

2.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by hand)		

connecting cable, female - male

H07RN-F
halogenated

Cable color:	
Color of coding:	■ black
Application:	250 V
Marking of poles:	L, N

Length (m)	Art.No.
	■ black
1	46.423.1030.1
2	46.423.2030.1
3	46.423.3030.1
4	46.423.4030.1
5	46.423.5030.1
6	46.423.6030.1
7	46.423.7030.1
8	46.423.8030.1
	■ black
1	46.423.1032.4
2	46.423.2032.4
3	46.423.3032.4
4	46.423.4032.4
5	46.423.5032.4
6	46.423.6032.4
7	46.423.7032.4
8	46.423.8032.4

Cable color:	
Color of coding:	■ signal brown
Application:	~50/-120 V
Marking of poles:	1, 2



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, female - free end

H07RN-F
halogenated

Cable color:	
Color of coding:	■ black
Application:	250 V
Marking of poles:	L, N

Length (m)	Art.No.
	■ black
1	46.423.1033.1
2	46.423.2033.1
3	46.423.3033.1
4	46.423.4033.1
5	46.423.5033.1
6	46.423.6033.1
7	46.423.7033.1
8	46.423.8033.1
	■ black
1	46.423.1037.4
2	46.423.2037.4
3	46.423.3037.4
4	46.423.4037.4
5	46.423.5037.4
6	46.423.6037.4
7	46.423.7037.4
8	46.423.8037.4

Cable color:	
Color of coding:	■ signal brown
Application:	~50/-120 V
Marking of poles:	1, 2

RST16I2, CABLE ASSEMBLY, 2-POLE

2.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, male - free end

**H07RN-F
halogenated**

Cable color:
Color of coding: ■ black
Application: 250 V
Marking of poles: L, N

Length (m)	Art.No.
	■ black
1	46.423.1034.1
2	46.423.2034.1
3	46.423.3034.1
4	46.423.4034.1
5	46.423.5034.1
6	46.423.6034.1
7	46.423.7034.1
8	46.423.8034.1
	■ black
1	46.423.1038.4
2	46.423.2038.4
3	46.423.3038.4
4	46.423.4038.4
5	46.423.5038.4
6	46.423.6038.4
7	46.423.7038.4
8	46.423.8038.4

Cable color:
Color of coding: ■ signal brown
Application: ~50/-120 V
Marking of poles: 1, 2

RST® MINI

RST16I3, CONNECTOR, 3-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	16 A	Cross section fine-stranded: 0,25 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid: 0,25 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.
Lockable:	self-locking (unlocking by hand)	

female



male



straight, for cables Ø 5-9.5 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	46.031.4553.1	46.032.4553.1
□ light grey	250 V with PE	L, N, PE	46.031.4553.0	46.032.4553.0
■ leaves green	250/400 V with PE	1, 2, PE	46.031.4555.7	46.032.4555.7
■ light blue	250/400 V	1, 2, 3	46.031.4553.9	46.032.4553.9
■ turquoise blue	250/400 V with PE	D1, D2, PE	46.031.4550.6	46.032.4550.6
■ signal brown	~50/-120 V	1, 2, 3	46.031.4550.4	46.032.4550.4

female



male



straight, for cables Ø 7.1-13 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	46.031.4453.1	46.032.4453.1
□ light grey	250 V with PE	L, N, PE	46.031.4453.0	46.032.4453.0
■ leaves green	250/400 V with PE	1, 2, PE	46.031.4455.7	46.032.4455.7
■ light blue	250/400 V	1, 2, 3	46.031.4453.9	46.032.4453.9
■ turquoise blue	250/400 V with PE	D1, D2, PE	46.031.4450.6	46.032.4450.6
■ signal brown	~50/-120 V	1, 2, 3	46.031.4450.4	46.032.4450.4

RST16I3, DEVICE CONNECTOR, M16, 3-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	16 A	Cross section fine-stranded:
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:
Terminations per pole:	1	Additional technical data, see facts & data.
Lockable:	self-locking (unlocking by hand)	

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	46.031.5053.1	46.032.5053.1
□ light grey	250 V with PE	L, N, PE	46.031.5053.0	46.032.5053.0
■ leaves green	250/400 V with PE	1, 2, PE	46.031.5055.7	46.032.5055.7
■ light blue	250/400 V	1, 2, 3	46.031.5053.9	46.032.5053.9
■ turquoise blue	250/400 V with PE	D1, D2, PE	46.031.5050.6	46.032.5050.6
■ signal brown	~50/-120 V	1, 2, 3	46.031.5050.4	46.032.5050.4

RST16I3, DEVICE CONNECTOR, M20, 3-POLE

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	16 A	Cross section fine-stranded: 0,5 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 0,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by hand)	solid:
46.031.M053.1		Additional technical data, see facts & data.

male

female



modular, straight, with longitudinal sealing			male	female
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250 V with PE	L, N, PE	46.032.M0L0.1	46.031.M0L0.1
□ light grey	250 V with PE	L, N, PE	46.032.M0L0.0	46.031.M0L0.0
■ leaves green	250/400 V with PE	1, 2, PE	46.032.M0L0.7	46.031.M0L0.7
■ light blue	250/400 V	1, 2, 3	46.032.M0L0.9	46.031.M0L0.9
■ turquoise blue	250/400 V with PE	D1, D2, PE	46.032.M0L0.6	46.031.M0L0.6
■ signal brown	~50/-120 V	1, 2, 3	46.032.M0L0.4	46.031.M0L0.4

male

female



modular, straight			male	female
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250 V with PE	L, N, PE	46.032.M053.1	46.031.M053.1
□ light grey	250 V with PE	L, N, PE	46.032.M053.0	46.031.M053.0
■ leaves green	250/400 V with PE	1, 2, PE	46.032.M055.7	46.031.M055.7
■ light blue	250/400 V	1, 2, 3	46.032.M053.9	46.031.M053.9
■ turquoise blue	250/400 V with PE	D1, D2, PE	46.032.M050.6	46.031.M050.6
■ signal brown	~50/-120 V	1, 2, 3	46.032.M050.4	46.031.M050.4

RST16I3, DISTRIBUTOR, 3-POLE

TECHNICAL DATA

Rated current:	16 A	Lockable:	self-locking (unlocking by hand)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	



distribution block 1I / 20, series connection, with fastening option to 06.562.5853.1

Color of coding	Application	Marking of poles	Art.No.
■ leaves green	250/400 V with PE	1, 2, PE	46.030.1355.7
■ signal brown	~50/-120 V	1, 2, 3	46.030.1355.4



distribution block 1I / 20, parallel connection, with fastening option to 06.562.5853.0 / 06.562.5853.1

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V with PE	L, N, PE	46.030.1253.1
□ light grey	250 V with PE	L, N, PE	46.030.1253.0
■ leaves green	250/400 V with PE	1, 2, PE	46.030.1255.7
■ light blue	250/400 V	1, 2, 3	46.030.1253.9
■ turquoise blue	250/400 V with PE	D1, D2, PE	46.030.1250.6
■ signal brown	~50/-120 V	1, 2, 3	46.030.1250.4



compact distributor 1I / 30, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V with PE	L, N, PE	46.030.0153.1
□ light grey	250 V with PE	L, N, PE	46.030.0153.0
■ leaves green	250/400 V with PE	1, 2, PE	46.030.0155.7
■ light blue	250/400 V	1, 2, 3	46.030.0153.9
■ turquoise blue	250/400 V with PE	D1, D2, PE	46.030.0150.6

RST16I3, CABLE ASSEMBLY, 3-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by hand)		

connecting cable, female - male

Cable color:	
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free B2ca s1 d1 a1
Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	■ black
0.5	46.432.0530.1	46.432.0500.1	
1	46.432.1030.1	46.432.1000.1	46.432.10B0.1
2	46.432.2030.1	46.432.2000.1	46.432.20B0.1
3	46.432.3030.1	46.432.3000.1	
4	46.432.4030.1	46.432.4000.1	
5	46.432.5030.1	46.432.5000.1	



connecting cable, female - male

Cable color:	
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

	H05Z1Z1-F halogen free Cca s1 d1 a1
Length (m)	Art.No.
	■ black
0.5	
1	46.432.10C0.1
2	46.432.20C0.1
3	
4	
5	

RST16I3, CABLE ASSEMBLY, 3-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free B2ca s1 d1 a1
Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	■ black
0.5	46.432.0533.1	46.432.0503.1	
1	46.432.1033.1	46.432.1003.1	46.432.10B3.1
2	46.432.2033.1	46.432.2003.1	46.432.20B3.1
3	46.432.3033.1	46.432.3003.1	
4	46.432.4033.1	46.432.4003.1	
5	46.432.5033.1	46.432.5003.1	



connection cable, female - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

	H05Z1Z1-F halogen free Cca s1 d1 a1
Length (m)	Art.No.
	■ black
0.5	
1	46.432.10C3.1
2	46.432.20C3.1
3	
4	
5	

RST® MINI

RST16I3, CABLE ASSEMBLY, 3-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, male - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free B2ca s1 d1 a1
Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	■ black
0.5	46.432.0534.1	46.432.0504.1	
1	46.432.1034.1	46.432.1004.1	46.432.10B4.1
2	46.432.2034.1	46.432.2004.1	46.432.20B4.1
3	46.432.3034.1	46.432.3004.1	46.432.30B4.1
4	46.432.4034.1	46.432.4004.1	
5	46.432.5034.1	46.432.5004.1	



connection cable, male - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

	H05Z1Z1-F halogen free Cca s1 d1 a1
Length (m)	Art.No.
	■ black
0.5	
1	46.432.10C4.1
2	46.432.20C4.1
3	
4	
5	

RST16I3, CABLE ASSEMBLY, 3-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Lockable:	self-locking (unlocking by hand)	type of construction:	Cable screw gland
		Additional technical data, see facts & data.	

mains connection cable, female - male CEE 7/4

H07RN-F
halogenated

H05VV-F
halogenated
Eca

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

Length (m)	Art.No.	Art.No.
	■ black	■ black
1.5	99.705.0000.8	99.700.0000.8
2.5	99.706.0000.8	99.701.0000.8
4	99.707.0000.8	
5	99.708.0000.8	
8	99.709.0000.8	



mains connection cable, male - female CEE 7/4

H07RN-F
halogenated

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

Length (m)	Art.No.
	■ black
0.5	99.710.0000.8

RST® MINI

RST16I3, CABLE ASSEMBLY, 3-POLE

2.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by hand)		

connecting cable, female - male

Cable color:	
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

Cable color:	
Color of coding:	■ leaves green
Application:	250/400 V with PE
Marking of poles:	1, 2, PE

Cable color:	
Color of coding:	■ light blue
Application:	250/400 V
Marking of poles:	1, 2, 3

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	46.433.1030.1	46.433.1000.1
2	46.433.2030.1	46.433.2000.1
3	46.433.3030.1	46.433.3000.1
4	46.433.4030.1	46.433.4000.1
5	46.433.5030.1	46.433.5000.1
6	46.433.6030.1	46.433.6000.1
7	46.433.7030.1	46.433.7000.1
8	46.433.8030.1	46.433.8000.1
	■ black	
1	46.433.1031.7	
2	46.433.2031.7	
3	46.433.3031.7	
4	46.433.4031.7	
5	46.433.5031.7	
6	46.433.6031.7	
7	46.433.7031.7	
8	46.433.8031.7	
	■ black	
1	46.433.1030.9	
2	46.433.2030.9	
3	46.433.3030.9	
4	46.433.4030.9	
5	46.433.5030.9	
6	46.433.6030.9	
7	46.433.7030.9	
8	46.433.8030.9	

RST16I3, CABLE ASSEMBLY, 3-POLE

2.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color: black
Color of coding: black
Application: 250 V with PE
Marking of poles: L, N, PE

Cable color: leaves green
Color of coding: leaves green
Application: 250/400 V with PE
Marking of poles: 1, 2, PE

Cable color: light blue
Color of coding: light blue
Application: 250/400 V
Marking of poles: 1, 2, 3

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	black	black
1	46.433.1033.1	46.433.1003.1
2	46.433.2033.1	46.433.2003.1
3	46.433.3033.1	46.433.3003.1
4	46.433.4033.1	46.433.4003.1
5	46.433.5033.1	46.433.5003.1
6	46.433.6033.1	46.433.6003.1
7	46.433.7033.1	46.433.7003.1
8	46.433.8033.1	46.433.8003.1
	black	
1	46.433.1035.7	
2	46.433.2035.7	
3	46.433.3035.7	
4	46.433.4035.7	
5	46.433.5035.7	
6	46.433.6035.7	
7	46.433.7035.7	
8	46.433.8035.7	
	black	
1	46.433.1033.9	
2	46.433.2033.9	
3	46.433.3033.9	
4	46.433.4033.9	
5	46.433.5033.9	
6	46.433.6033.9	
7	46.433.7033.9	
8	46.433.8033.9	

connection cable, male - free end

Cable color: black
Color of coding: black
Application: 250 V with PE
Marking of poles: L, N, PE

Cable color: leaves green
Color of coding: leaves green
Application: 250/400 V with PE
Marking of poles: 1, 2, PE

Cable color: light blue
Color of coding: light blue
Application: 250/400 V
Marking of poles: 1, 2, 3

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	black	black
1	46.433.1034.1	46.433.1004.1
2	46.433.2034.1	46.433.2004.1
3	46.433.3034.1	46.433.3004.1
4	46.433.4034.1	46.433.4004.1
5	46.433.5034.1	46.433.5004.1
6	46.433.6034.1	46.433.6004.1
7	46.433.7034.1	46.433.7004.1
8	46.433.8034.1	46.433.8004.1
	black	
1	46.433.1036.7	
2	46.433.2036.7	
3	46.433.3036.7	
4	46.433.4036.7	
5	46.433.5036.7	
6	46.433.6036.7	
7	46.433.7036.7	
8	46.433.8036.7	
	black	
1	46.433.1034.9	
2	46.433.2034.9	
3	46.433.3034.9	
4	46.433.4034.9	
5	46.433.5034.9	
6	46.433.6034.9	
7	46.433.7034.9	
8	46.433.8034.9	

RST® MINI

RST16I4, CONNECTOR, 4-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	16 A	Cross section fine-stranded: 0,25 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 0,25 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by hand)	solid:
		Additional technical data, see facts & data.

female



male



straight, for cables Ø 7.1-13 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	46.051.4554.1	46.052.4554.1
□ light grey	250/400 V with PE	1, 2, 3, PE	46.051.4554.0	46.052.4554.0
■ signal brown	~50/-120 V	1, 2, 3, 4	46.051.4551.4	46.052.4551.4

female



male



straight, for cables Ø 10-14.5 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	46.051.4154.1	46.052.4154.1
□ light grey	250/400 V with PE	1, 2, 3, PE	46.051.4154.0	46.052.4154.0
■ signal brown	~50/-120 V	1, 2, 3, 4	46.051.4151.4	46.052.4151.4

RST16I4, DEVICE CONNECTOR, M20, 4-POLE

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	16 A	Cross section fine-stranded: 0,5 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 0,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by hand)	solid:
		Additional technical data, see facts & data.

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	46.051.M0L1.1	46.052.M0L1.1
□ light grey	250/400 V with PE	1, 2, 3, PE	46.051.M0L1.0	46.052.M0L1.0
■ signal brown	~50/-120 V	1, 2, 3, 4	46.051.M0L1.4	46.052.M0L1.4

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	46.051.M054.1	46.052.M054.1
□ light grey	250/400 V with PE	1, 2, 3, PE	46.051.M054.0	46.052.M054.0
■ signal brown	~50/-120 V	1, 2, 3, 4	46.051.M051.4	46.052.M051.4

RST16I4, DEVICE CONNECTOR, M20,2, 4-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	16 A	Cross section fine-stran-
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section
Lockable:	self-locking (unlocking by hand)	solid:
		Additional technical data, see facts & data.

female



male



standard, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	46.051.5054.1	46.052.5054.1
□ light grey	250/400 V with PE	1, 2, 3, PE	46.051.5054.0	46.052.5054.0
■ signal brown	~50/~120 V	1, 2, 3, 4	46.051.5051.4	46.052.5051.4

RST16I4, DISTRIBUTOR, 4-POLE



TECHNICAL DATA			
Rated current:	16 A	Lockable:	self-locking (unlocking by hand)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	

distribution block 1I / 2O, parallel connection, with fastening option to 06.562.5853.0 / 06.562.5853.1

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	46.050.1254.1
□ light grey	250/400 V with PE	1, 2, 3, PE	46.050.1254.0
■ signal brown	~50/-120 V	1, 2, 3, 4	46.050.1251.4

compact distributor 1I / 3O, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	46.050.0154.1
□ light grey	250/400 V with PE	1, 2, 3, PE	46.050.0154.0
■ signal brown	~50/-120 V	1, 2, 3, 4	46.050.0151.4

RST16I5, CONNECTOR, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	16 A	Cross section fine-stranded: 0,25 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 0,25 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by hand)	solid:
		Additional technical data, see facts & data.

female



male



straight, for cables Ø 7.1-13 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	46.051.4553.1	46.052.4553.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	46.051.4553.0	46.052.4553.0
■ light blue	250/400 V	1, 2, 3, 4, 5	46.051.4553.9	46.052.4553.9
■ turquoise blue	250 V with PE	L, N, PE, 1, 2	46.051.4553.6	46.052.4553.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	46.051.4550.4	46.052.4550.4

female



male



straight, for cables Ø 10-14.5 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	46.051.4153.1	46.052.4153.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	46.051.4153.0	46.052.4153.0
■ light blue	250/400 V	1, 2, 3, 4, 5	46.051.4153.9	46.052.4153.9
■ turquoise blue	250 V with PE	L, N, PE, 1, 2	46.051.4153.6	46.052.4153.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	46.051.4150.4	46.052.4150.4

RST16I5, DEVICE CONNECTOR, M20, 5-POLE

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	16 A	Cross section fine-stranded: 0,5 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 0,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by hand)	solid:
		Additional technical data, see facts & data.

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	46.051.M0L0.1	46.052.M0L0.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	46.051.M0L0.0	46.052.M0L0.0
■ light blue	250/400 V	1, 2, 3, 4, 5	46.051.M0L0.9	46.052.M0L0.9
■ turquoise blue	250 V with PE	L, N, PE, 1, 2	46.051.M0L0.6	46.052.M0L0.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	46.051.M0L0.4	46.052.M0L0.4

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	46.051.M053.1	46.052.M053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	46.051.M053.0	46.052.M053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	46.051.M053.9	46.052.M053.9
■ turquoise blue	250 V with PE	L, N, PE, 1, 2	46.051.M053.6	46.052.M053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	46.051.M050.4	46.052.M050.4

RST16I5, DEVICE CONNECTOR, M20,2, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	16 A	Cross section fine-stranded:
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:
Terminations per pole:	1	0,25 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.

female



male



standard, straight

			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	46.051.5053.1	46.052.5053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	46.051.5053.0	46.052.5053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	46.051.5053.9	46.052.5053.9
■ turquoise blue	250 V with PE	L, N, PE, 1, 2	46.051.5053.6	46.052.5053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	46.051.5050.4	46.052.5050.4

RST16I5, DISTRIBUTOR, 5-POLE



TECHNICAL DATA			
----------------	--	--	--

Rated current:	16 A	Lockable:	self-locking (unlocking by hand)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	

distribution block 1I / 20, parallel connection, with fastening option to 06.562.5853.0 / 06.562.5853.1

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	46.050.1253.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	46.050.1253.0
■ light blue	250/400 V	1, 2, 3, 4, 5	46.050.1253.9
■ turquoise blue	250 V with PE	L, N, PE, 1, 2	46.050.1253.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	46.050.1250.4

compact distributor 1I / 30, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	46.050.0153.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	46.050.0153.0
■ light blue	250/400 V	1, 2, 3, 4, 5	46.050.0153.9
■ turquoise blue	250 V with PE	L, N, PE, 1, 2	46.050.0153.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	46.050.0150.4

RST16I5, CABLE ASSEMBLY, 5-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current: 16 A
Degree of protection (IP): IP66/68 (3m;2h) /IP69
Lockable: self-locking (unlocking by hand)

type of construction: Cable screw gland
Additional technical data, see facts & data.

connecting cable, female - male

Cable color: black
Color of coding: black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: black
Color of coding: black
Application: 250 V with PE
Marking of poles: L, N, PE, 1, 2

	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free B2ca s1 d1 a1
Length (m)	Art.No.	Art.No.	Art.No.
	black	black	black
0.5	46.452.0530.1	46.452.0500.1	
1	46.452.1030.1	46.452.1000.1	46.452.10B0.1
2	46.452.2030.1	46.452.2000.1	46.452.20B0.1
3	46.452.3030.1	46.452.3000.1	
4	46.452.4030.1	46.452.4000.1	
5	46.452.5030.1	46.452.5000.1	
	black	black	black
0.5	46.452.0530.6	46.452.0500.6	
1	46.452.1030.6	46.452.1000.6	46.452.10B0.6
2	46.452.2030.6	46.452.2000.6	46.452.20B0.6
3	46.452.3030.6	46.452.3000.6	
4	46.452.4030.6	46.452.4000.6	
5	46.452.5030.6	46.452.5000.6	

connecting cable, female - male

Cable color: black
Color of coding: black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: black
Color of coding: black
Application: 250 V with PE
Marking of poles: L, N, PE, 1, 2

	H05Z1Z1-F halogen free Cca s1 d1 a1	H05Z1Z1-F halogen free Dca s1 d2 a1	H05Z1Z1-F halogen free Eca
Length (m)	Art.No.	Art.No.	Art.No.
	black	black	black
0.5			46.452.0560.1
1	46.452.10C0.1	46.452.10D0.1	46.452.1060.1
2	46.452.20C0.1	46.452.20D0.1	46.452.2060.1
3			46.452.3060.1
4			46.452.4060.1
5			46.452.5060.1
	black	black	black
0.5			46.452.0560.6
1	46.452.10C0.6	46.452.10D0.6	46.452.1060.6
2	46.452.20C0.6	46.452.20D0.6	46.452.2060.6
3	46.452.30C0.6		46.452.3060.6
4	46.452.40C0.6		46.452.4060.6
5	46.452.50C0.6		46.452.5060.6

RST16I5, CABLE ASSEMBLY, 5-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color: black
Color of coding: black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: black
Color of coding: turquoise blue
Application: 250 V with PE
Marking of poles: L, N, PE, 1, 2

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free B2ca s1 d1 a1
	Art.No.	Art.No.	Art.No.
0.5	46.452.0533.1	46.452.0503.1	
1	46.452.1033.1	46.452.1003.1	46.452.10B3.1
2	46.452.2033.1	46.452.2003.1	46.452.20B3.1
3	46.452.3033.1	46.452.3003.1	
4	46.452.4033.1	46.452.4003.1	
5	46.452.5033.1	46.452.5003.1	
6	46.452.6033.1	46.452.6003.1	
0.5	46.452.0533.6	46.452.0503.6	
1	46.452.1033.6	46.452.1003.6	46.452.10B3.6
2	46.452.2033.6	46.452.2003.6	46.452.20B3.6
3	46.452.3033.6	46.452.3003.6	
4	46.452.4033.6	46.452.4003.6	
5	46.452.5033.6	46.452.5003.6	

connection cable, female - free end

Cable color: black
Color of coding: black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: black
Color of coding: turquoise blue
Application: 250 V with PE
Marking of poles: L, N, PE, 1, 2

Length (m)	H05Z1Z1-F halogen free Cca s1 d1 a1	H05Z1Z1-F halogen free Dca s1 d2 a1	H05Z1Z1-F halogen free Eca
	Art.No.	Art.No.	Art.No.
0.5			46.452.0563.1
1	46.452.10C3.1	46.452.10D3.1	46.452.1063.1
2	46.452.20C3.1	46.452.20D3.1	46.452.2063.1
3			46.452.3063.1
4			46.452.4063.1
5			46.452.5063.1
6			
0.5			46.452.0563.6
1	46.452.10C3.6	46.452.10D3.6	46.452.1063.6
2	46.452.20C3.6	46.452.20D3.6	46.452.2063.6
3			46.452.3063.6
4			46.452.4063.6
5			46.452.5063.6

RST16I5, CABLE ASSEMBLY, 5-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, male - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, N, PE

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE, 1, 2

	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free B2ca s1 d1 a1
Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	■ black
0.5	46.452.0534.1		
1	46.452.1034.1	46.452.1004.1	46.452.10B4.1
2	46.452.2034.1	46.452.2004.1	46.452.20B4.1
3	46.452.3034.1	46.452.3004.1	
4	46.452.4034.1	46.452.4004.1	
5	46.452.5034.1	46.452.5004.1	
	■ black	■ black	■ black
0.5	46.452.0534.6	46.452.0504.6	
1	46.452.1034.6	46.452.1004.6	46.452.10B4.6
2	46.452.2034.6	46.452.2004.6	46.452.20B4.6
3	46.452.3034.6	46.452.3004.6	
4	46.452.4034.6	46.452.4004.6	
5	46.452.5034.6	46.452.5004.6	



connection cable, male - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, N, PE

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE, 1, 2

	H05Z1Z1-F halogen free Cca s1 d1 a1	H05Z1Z1-F halogen free Dca s1 d2 a1	H05Z1Z1-F halogen free Eca
Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	■ black
0.5			46.452.0564.1
1	46.452.10C4.1	46.452.10D4.1	46.452.1064.1
2	46.452.20C4.1	46.452.20D4.1	46.452.2064.1
3			46.452.3064.1
4			46.452.4064.1
5			46.452.5064.1
	■ black	■ black	■ black
0.5	46.452.05C4.6		46.452.0564.6
1	46.452.10C4.6	46.452.10D4.6	46.452.1064.6
2	46.452.20C4.6	46.452.20D4.6	46.452.2064.6
3			46.452.3064.6
4			46.452.4064.6
5			46.452.5064.6

RST16I5, CABLE ASSEMBLY, 5-POLE

2.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by hand)		

connecting cable, female - male

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, N, PE

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE, 1, 2

	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free Eca
Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	
1	46.453.1030.1	46.453.1000.1	
2	46.453.2030.1	46.453.2000.1	
3	46.453.3030.1	46.453.3000.1	
4	46.453.4030.1	46.453.4000.1	
5	46.453.5030.1	46.453.5000.1	
6	46.453.6030.1	46.453.6000.1	
7	46.453.7030.1	46.453.7000.1	
8	46.453.8030.1	46.453.8000.1	
	■ black	■ black	■ black
1	46.453.1030.6	46.453.1000.6	46.453.1060.6
2	46.453.2030.6	46.453.2000.6	46.453.2060.6
3	46.453.3030.6	46.453.3000.6	46.453.3060.6
4	46.453.4030.6	46.453.4000.6	46.453.4060.6
5	46.453.5030.6	46.453.5000.6	46.453.5060.6
6	46.453.6030.6	46.453.6000.6	46.453.6060.6
7	46.453.7030.6	46.453.7000.6	46.453.7060.6
8	46.453.8030.6	46.453.8000.6	46.453.8060.6



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, N, PE

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE, 1, 2

	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free Eca
Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	
1	46.453.1033.1	46.453.1003.1	
2	46.453.2033.1	46.453.2003.1	
3	46.453.3033.1	46.453.3003.1	
4	46.453.4033.1	46.453.4003.1	
5	46.453.5033.1	46.453.5003.1	
6	46.453.6033.1	46.453.6003.1	
7	46.453.7033.1	46.453.7003.1	
8	46.453.8033.1	46.453.8003.1	
	■ black	■ black	■ black
1	46.453.1033.6	46.453.1003.6	46.453.1063.6
2	46.453.2033.6	46.453.2003.6	46.453.2063.6
3	46.453.3033.6	46.453.3003.6	46.453.3063.6
4	46.453.4033.6	46.453.4003.6	46.453.4063.6
5	46.453.5033.6	46.453.5003.6	46.453.5063.6
6	46.453.6033.6	46.453.6003.6	46.453.6063.6
7	46.453.7033.6	46.453.7003.6	46.453.7063.6
8	46.453.8033.6	46.453.8003.6	46.453.8063.6

RST16I5, CABLE ASSEMBLY, 5-POLE

2.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by hand)	Additional technical data, see facts & data.	

connection cable, male - free end

Cable color: ■ black
Color of coding: ■ black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: ■ turquoise blue
Color of coding: ■ turquoise blue
Application: 250 V with PE
Marking of poles: L, N, PE, 1, 2

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free Eca
	Art.No.	Art.No.	Art.No.
	■ black	■ black	
1	46.453.1034.1	46.453.1004.1	
2	46.453.2034.1	46.453.2004.1	
3	46.453.3034.1	46.453.3004.1	
4	46.453.4034.1	46.453.4004.1	
5	46.453.5034.1	46.453.5004.1	
6	46.453.6034.1	46.453.6004.1	
7	46.453.7034.1	46.453.7004.1	
8	46.453.8034.1	46.453.8004.1	
	■ black	■ black	■ black
1	46.453.1034.6	46.453.1004.6	46.453.1064.6
2	46.453.2034.6	46.453.2004.6	46.453.2064.6
3	46.453.3034.6	46.453.3004.6	46.453.3064.6
4	46.453.4034.6	46.453.4004.6	46.453.4064.6
5	46.453.5034.6	46.453.5004.6	46.453.5064.6
6	46.453.6034.6	46.453.6004.6	46.453.6064.6
7	46.453.7034.6	46.453.7004.6	46.453.7064.6
8	46.453.8034.6	46.453.8004.6	46.453.8064.6

RST16, ACCESSORIES



cover piece for 2-/3-pole, captive against loss, for female

Color	Art.No.
■ black	06.563.8753.1
□ light grey	06.563.8753.0



cover piece for 2-/3-pole, captive against loss, for male

Color	Art.No.
■ black	06.563.8953.1
□ light grey	06.563.8953.0



cover piece for 2-/3-pole, not captive against loss, for female

Color	Art.No.
■ black	06.563.8653.1
□ light grey	06.563.8653.0



cover piece for 2-/3-pole, not captive against loss, for male

Color	Art.No.
■ black	06.563.8853.1
□ light grey	06.563.8853.0



cover piece for 4-/5-pole, captive against loss, for female

Color	Art.No.
■ black	06.563.9153.1
□ light grey	06.563.9153.0



cover piece for 4-/5-pole, captive against loss, for male

Color	Art.No.
■ black	06.563.9353.1
□ light grey	06.563.9353.0



cover piece for 4-/5-pole, not captive against loss, for female

Color	Art.No.
■ black	06.563.9053.1
□ light grey	06.563.9053.0

RST16, ACCESSORIES



cover piece for 4-/5-pole, not captive against loss, for male

Color	Art.No.
■ black	06.563.9253.1
□ light grey	06.563.9253.0



Spare sealing, Ø 5,0 - 9,5 mm

Color	Art.No.
■ black	06.562.0583.0



Spare sealing, Ø 7,1 - 13 mm

Color	Art.No.
■ black	06.561.8383.0



mounting panel, for distribution block

Color	Art.No.
■ black	06.562.5853.1
□ light grey	06.562.5853.0



sample case, RST16 Spring clamp connection MOLA

Art.No.
99.441.0000.1



sample case, RST16i3

Art.No.
99.438.0000.1



sample case, RST16i5

Art.No.
99.675.0000.0

RST16, ACCESSORIES



sample case, SMI

Art.No.

99.688.0000.0

RST® CLASSIC

The all-rounder with the most extensive range.



FEATURES

- + 2-pole to 7-pole
- + 20 A rated current
- + Mechanical + color coding
- + Applications in protection class II and extra-low voltage sector for industry and LED technology

RST20i2



Mechanical coding (view on connector interface female)	black	light gray	leaf green	pebble gray	signal brown
Operating voltage (application)	250 V	250 V	250 V	~50/-120 V	~50/-120 V
Marking of poles	L, N	L, N	L, N	+, -	1, 2

RST20i3



Mechanical coding (view on connector interface female)	black	light gray	leaf green	light blue	signal brown
Operating voltage (application)	250 V with PE	250 V with PE	250/400 V with PE	250/400 V	~50/-120 V with PE
Marking of poles	L, N, PE	L, N, PE	1, 2, PE	1, 2, 3	1, 2, PE

RST20i4



Mechanical coding (view on connector interface female)	black	light gray	signal brown
Operating voltage (application)	250/400 V with PE	250/400 V with PE	~50/-120 V
Marking of poles	1, 2, 3, PE	1, 2, 3, PE	1, 2, 3, 4

RST20i5



Mechanical coding (view on connector interface female)	black	light gray	turquoise	light blue	pebble gray	signal brown
Operating voltage (application)	250/400 V with PE	250/400 V with PE	250 V with PE	250/400 V	250/400 V	~50/-120 V
Marking of poles	1, 2, 3, N, PE	1, 2, 3, N, PE	D1, D2, L, PE, N	1, 2, 3, 4, 5	N, E, 1, 2, 3	1, 2, 3, 4, 5

RST20i6



Mechanical coding (view on connector interface female)	turquoise
Operating voltage (application)	250/400 V with PE
Marking of poles	L, N, PE, 1, 2, Ls

RST20i7



Mechanical coding (view on connector interface female)	black	light gray	turquoise	light blue
Operating voltage (application)	250/400 V with PE	250/400 V with PE	250/400 V with PE	250/400 V
Marking of poles	1, 2, 3, 4/N, 5, 6, PE	1, 2, 3, 4/N, 5, 6, PE	L, N, PE, 1, 2, 3, 4	1, 2, 3, 4/N, 5, 6, 7

RST25i3



Mechanical coding (view on connector interface female)	Concrete gray
Operating voltage (application)	250 V with PE
Marking of poles	L, N, PE

RST25i5



Mechanical coding (view on connector interface female)	Concrete gray
Operating voltage (application)	250/400 V with PE
Marking of poles	L, N, PE, 1, 2

RST20I2, CONNECTOR, 2-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 6 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.4053.1	96.022.4053.1
□ light grey	250 V	L, N	96.021.4053.0	96.022.4053.0
■ leaves green	250 V	1, 2	96.021.4055.7	96.022.4055.7
■ pebble grey	~50/-120 V	+, -	96.021.4050.8	96.022.4050.8
■ signal brown	~50/-120 V	1, 2	96.021.4051.4	96.022.4051.4

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.4153.1	96.022.4153.1
□ light grey	250 V	L, N	96.021.4153.0	96.022.4153.0
■ leaves green	250 V	1, 2	96.021.4155.7	96.022.4155.7
■ pebble grey	~50/-120 V	+, -	96.021.4150.8	96.022.4150.8
■ signal brown	~50/-120 V	1, 2	96.021.4151.4	96.022.4151.4

female



male



straight, for AS-i profile cable

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ pebble grey	~50/-120 V	+, -	96.021.4950.8	96.022.4950.8
■ signal brown	~50/-120 V	1, 2	96.021.4951.4	96.022.4951.4

female



male



straight, for illumination cable

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.4453.1	96.022.4453.1
□ light grey	250 V	L, N	96.021.4453.0	96.022.4453.0
■ signal brown	~50/-120 V	1, 2	96.021.4451.4	96.022.4451.4

male



straight, for pole socket, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	male Art.No.
■ black	250 V	L, N	99.592.0000.7

male



straight, for pole socket, for illumination cable

Color of coding	Application	Marking of poles	male Art.No.
■ black	250 V	L, N	99.593.0000.7

RST20I2, CONNECTOR, 2-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 6 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.023.4053.1	96.024.4053.1
□ light grey	250 V	L, N	96.023.4053.0	96.024.4053.0
■ pebble grey	~50/-120 V	+, -	96.023.4050.8	96.024.4050.8
■ signal brown	~50/-120 V	1, 2	96.023.4051.4	96.024.4051.4

female



male



angled 90°, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.023.4153.1	96.024.4153.1
□ light grey	250 V	L, N	96.023.4153.0	96.024.4153.0
■ pebble grey	~50/-120 V	+, -	96.023.4150.8	96.024.4150.8
■ signal brown	~50/-120 V	1, 2	96.023.4151.4	96.024.4151.4

female



male



angled 90°, for AS-i profile cable

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ pebble grey	~50/-120 V	+, -	96.023.4950.8	96.024.4950.8
■ signal brown	~50/-120 V	1, 2	96.023.4951.4	96.024.4951.4

female



splitter connector, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.
■ black	250 V	L, N	96.021.4253.1*
□ light grey	250 V	L, N	96.021.4253.0*
■ pebble grey	~50/-120 V	+, -	96.021.4250.8*
■ signal brown	~50/-120 V	1, 2	96.021.4251.4*

female



male



splitter connector, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.4353.1*	
□ light grey	250 V	L, N	96.021.4353.0*	
■ pebble grey	~50/-120 V	+, -		96.022.4350.8*
■ signal brown	~50/-120 V	1, 2	96.021.4351.4*	

*) Alternative technical data, see facts & data.

RST20I2, CONNECTOR, 2-POLE

SPRING CLAMP CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,5 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,5 mm ² - 2,5 mm ²
Terminations per pole:	2	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.0053.1	96.022.0053.1
□ light grey	250 V	L, N	96.021.0053.0	96.022.0053.0
■ pebble grey	~50/-120 V	+, -	96.021.0050.8	96.022.0050.8
■ signal brown	~50/-120 V	1, 2	96.021.0051.4	96.022.0051.4

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.0153.1	96.022.0153.1
□ light grey	250 V	L, N	96.021.0153.0	96.022.0153.0
■ pebble grey	~50/-120 V	+, -	96.021.0150.8	96.022.0150.8
■ signal brown	~50/-120 V	1, 2	96.021.0151.4	96.022.0151.4

female



male



straight, for AS-i profile cable

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ pebble grey	~50/-120 V	+, -	96.021.0950.8	96.022.0950.8
■ signal brown	~50/-120 V	1, 2	96.021.0951.4	96.022.0951.4

female



male



straight, for illumination cable

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.0453.1	96.022.0453.1
□ light grey	250 V	L, N	96.021.0453.0	96.022.0453.0

female



male



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.023.0053.1	96.024.0053.1
□ light grey	250 V	L, N	96.023.0053.0	96.024.0053.0
■ pebble grey	~50/-120 V	+, -	96.023.0050.8	96.024.0050.8
■ signal brown	~50/-120 V	1, 2	96.023.0051.4	96.024.0051.4

female



male



angled 90°, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.023.0153.1	96.024.0153.1
□ light grey	250 V	L, N	96.023.0153.0	96.024.0153.0
■ pebble grey	~50/-120 V	+, -	96.023.0150.8	96.024.0150.8
■ signal brown	~50/-120 V	1, 2	96.023.0151.4	96.024.0151.4

RST20I2, CONNECTOR, 2-POLE

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 0,5 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 0,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



angled 90°, for AS-i profile cable

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ pebble grey	~50/-120 V	+, -	96.023.0950.8	96.024.0950.8
■ signal brown	~50/-120 V	1, 2	96.023.0951.4	96.024.0951.4

female



male



splitter connector, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.0253.1	96.022.0253.1
□ light grey	250 V	L, N	96.021.0253.0	
■ pebble grey	~50/-120 V	+, -	96.021.0250.8	
■ signal brown	~50/-120 V	1, 2	96.021.0251.4	

female



male



splitter connector, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.0353.1	
□ light grey	250 V	L, N	96.021.0353.0	
■ pebble grey	~50/-120 V	+, -		96.022.0350.8
■ signal brown	~50/-120 V	1, 2	96.021.0351.4	

RST20I2, DEVICE CONNECTOR, M16, 2-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 0,75 mm ² - 6 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.6153.1	96.022.6153.1
□ light grey	250 V	L, N	96.021.6153.0	96.022.6153.0
■ pebble grey	~50/-120 V	+, -	96.021.6150.8	96.022.6150.8
■ signal brown	~50/-120 V	1, 2	96.021.6151.4	96.022.6151.4

female



male



modular, angled 7°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.025.6153.1	96.026.6153.1
□ light grey	250 V	L, N	96.025.6153.0	96.026.6153.0

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 0,5 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 0,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.2153.1	96.022.2153.1
□ light grey	250 V	L, N	96.021.2153.0	96.022.2153.0
■ pebble grey	~50/-120 V	+, -	96.021.2150.8	96.022.2150.8
■ signal brown	~50/-120 V	1, 2	96.021.2151.4	96.022.2151.4

female



male



modular, angled 7°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.025.2153.1	96.026.2153.1
□ light grey	250 V	L, N	96.025.2153.0	96.026.2153.0

RST20I2, DEVICE CONNECTOR, M20, 2-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 0,75 mm ² - 6 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.6053.1	96.022.6053.1
□ light grey	250 V	L, N	96.021.6053.0	96.022.6053.0
■ pebble grey	~50/-120 V	+, -	96.021.6050.8	96.022.6050.8
■ signal brown	~50/-120 V	1, 2	96.021.6051.4	96.022.6051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.023.6053.1	96.024.6053.1
□ light grey	250 V	L, N	96.023.6053.0	96.024.6053.0
■ pebble grey	~50/-120 V	+, -	96.023.6050.8	96.024.6050.8
■ signal brown	~50/-120 V	1, 2	96.023.6051.4	96.024.6051.4

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 0,5 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 0,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.2053.1	96.022.2053.1
□ light grey	250 V	L, N	96.021.2053.0	96.022.2053.0
■ pebble grey	~50/-120 V	+, -	96.021.2050.8	96.022.2050.8
■ signal brown	~50/-120 V	1, 2	96.021.2051.4	96.022.2051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.023.2053.1	96.024.2053.1
□ light grey	250 V	L, N	96.023.2053.0	96.024.2053.0
■ pebble grey	~50/-120 V	+, -	96.023.2050.8	96.024.2050.8
■ signal brown	~50/-120 V	1, 2	96.023.2051.4	96.024.2051.4

RST20I2, DEVICE CONNECTOR, M25, 2-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 0,75 mm ² - 6 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.5053.1	96.022.5053.1
□ light grey	250 V	L, N	96.021.5053.0	96.022.5053.0
■ pebble grey	~50/-120 V	+, -	96.021.5050.8	96.022.5050.8
■ signal brown	~50/-120 V	1, 2	96.021.5051.4	96.022.5051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.023.6253.1	96.024.6253.1
□ light grey	250 V	L, N	96.023.6253.0	96.024.6253.0
■ pebble grey	~50/-120 V	+, -	96.023.6250.8	96.024.6250.8
■ signal brown	~50/-120 V	1, 2	96.023.6251.4	96.024.6251.4

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 0,5 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 0,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.021.1053.1	96.022.1053.1
□ light grey	250 V	L, N	96.021.1053.0	96.022.1053.0
■ pebble grey	~50/-120 V	+, -	96.021.1050.8	96.022.1050.8
■ signal brown	~50/-120 V	1, 2	96.021.1051.4	96.022.1051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	96.023.2253.1	96.024.2253.1
□ light grey	250 V	L, N	96.023.2253.0	96.024.2253.0
■ pebble grey	~50/-120 V	+, -	96.023.2250.8	96.024.2250.8
■ signal brown	~50/-120 V	1, 2	96.023.2251.4	96.024.2251.4

RST20I2, DISTRIBUTOR, 2-POLE



TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	

distribution block 1I / 30, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V	L, N	96.020.0153.1
□ light grey	250 V	L, N	96.020.0153.0
■ leaves green	250 V	1, 2	96.020.0155.7
■ pebble grey	~50/-120 V	+, -	96.020.0150.8
■ signal brown	~50/-120 V	1, 2	96.020.0151.4

distribution block 1I / 30, parallel connection, without fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V	L, N	96.020.0253.1
□ light grey	250 V	L, N	96.020.0253.0
■ pebble grey	~50/-120 V	+, -	96.020.0250.8
■ signal brown	~50/-120 V	1, 2	96.020.0251.4

TECHNICAL DATA

Rated current:	6 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	

distribution block 1I / 30, series connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ signal brown	~50/-120 V	1, 2	99.910.0000.7

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	

multi-distribution unit 1I / 70, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V	L, N	99.988.0000.7
■ signal brown	~50/-120 V	1, 2	99.946.0000.7

RST20I2, CABLE ASSEMBLY, 2-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	type of construction:	Shrinkage tube
Degree of protection (IP):	IP66/68 (3m;2h)	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

connecting cable, female - male

Cable color: ■ black
Color of coding: 250 V
Application: L, N
Marking of poles:

Cable color: ■ pebble grey
Color of coding: ~50/-120 V
Application: +, -
Marking of poles:

Cable color: ■ signal brown
Color of coding: ~50/-120 V
Application: 1, 2
Marking of poles:

Length (m)	H07RN-F halogenated Art.No.	H05VV-F halogenated Eca Art.No.	Ölflex® Classic 110 halogenated Art.No.
	Art.No.	Art.No.	Art.No.
1	96.222.1030.1	96.222.1000.1	
2	96.222.2030.1	96.222.2000.1	
3	96.222.3030.1	96.222.3000.1	
4	96.222.4030.1	96.222.4000.1	
5	96.222.5030.1	96.222.5000.1	
6	96.222.6030.1	96.222.6000.1	
7	96.222.7030.1	96.222.7000.1	
8	96.222.8030.1	96.222.8000.1	
1			■ Grey 96.222.1092.8
2			96.222.2092.8
3			96.222.3092.8
4			96.222.4092.8
5			96.222.5092.8
6			96.222.6092.8
7			96.222.7092.8
8			96.222.8092.8
1	■ black 96.222.1032.4	■ black 96.222.1002.4	■ Grey 96.222.1092.4
2	96.222.2032.4	96.222.2002.4	96.222.2092.4
3	96.222.3032.4	96.222.3002.4	96.222.3092.4
4	96.222.4032.4	96.222.4002.4	96.222.4092.4
5	96.222.5032.4	96.222.5002.4	96.222.5092.4
6	96.222.6032.4	96.222.6002.4	96.222.6092.4
7	96.222.7032.4	96.222.7002.4	96.222.7092.4
8	96.222.8032.4	96.222.8002.4	96.222.8092.4

RST20I2, CABLE ASSEMBLY, 2-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h)	type of construction:	Shrinkage tube
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color:
Color of coding: ■ black
Application: 250 V
Marking of poles: L, N

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V
Marking of poles: +, -

Cable color:
Color of coding: ■ signal brown
Application: ~50/-120 V
Marking of poles: 1, 2

H07RN-F

halogenated

H05VV-F

halogenated
Eca

Ölflex® Classic
110
halogenated

Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	
1	96.222.1033.1	96.222.1003.1	
2	96.222.2033.1	96.222.2003.1	
3	96.222.3033.1	96.222.3003.1	
4	96.222.4033.1	96.222.4003.1	
5	96.222.5033.1	96.222.5003.1	
6	96.222.6033.1	96.222.6003.1	
7	96.222.7033.1	96.222.7003.1	
8	96.222.8033.1	96.222.8003.1	
			■ Grey
1			96.222.1097.8
2			96.222.2097.8
3			96.222.3097.8
4			96.222.4097.8
5			96.222.5097.8
6			96.222.6097.8
7			96.222.7097.8
8			96.222.8097.8
	■ black	■ black	■ Grey
1	96.222.1037.4	96.222.1007.4	96.222.1097.4
2	96.222.2037.4	96.222.2007.4	96.222.2097.4
3	96.222.3037.4	96.222.3007.4	96.222.3097.4
4	96.222.4037.4	96.222.4007.4	96.222.4097.4
5	96.222.5037.4	96.222.5007.4	96.222.5097.4
6	96.222.6037.4	96.222.6007.4	96.222.6097.4
7	96.222.7037.4	96.222.7007.4	96.222.7097.4
8	96.222.8037.4	96.222.8007.4	96.222.8097.4

connection cable, male - free end

Cable color:
Color of coding: ■ black
Application: 250 V
Marking of poles: L, N

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V
Marking of poles: +, -

Cable color:
Color of coding: ■ signal brown
Application: ~50/-120 V
Marking of poles: 1, 2

H07RN-F

halogenated

H05VV-F

halogenated
Eca

Ölflex® Classic
110
halogenated

Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	
1	96.222.1034.1	96.222.1004.1	
2	96.222.2034.1	96.222.2004.1	
3	96.222.3034.1	96.222.3004.1	
4	96.222.4034.1	96.222.4004.1	
5	96.222.5034.1	96.222.5004.1	
6	96.222.6034.1	96.222.6004.1	
7	96.222.7034.1	96.222.7004.1	
8	96.222.8034.1	96.222.8004.1	
			■ Grey
1			96.222.1098.8
2			96.222.2098.8
3			96.222.3098.8
4			96.222.4098.8
5			96.222.5098.8
6			96.222.6098.8
7			96.222.7098.8
8			96.222.8098.8
	■ black	■ black	■ Grey
1	96.222.1038.4	96.222.1008.4	96.222.1098.4
2	96.222.2038.4	96.222.2008.4	96.222.2098.4
3	96.222.3038.4	96.222.3008.4	96.222.3098.4
4	96.222.4038.4	96.222.4008.4	96.222.4098.4
5	96.222.5038.4	96.222.5008.4	96.222.5098.4
6	96.222.6038.4	96.222.6008.4	96.222.6098.4
7	96.222.7038.4	96.222.7008.4	96.222.7098.4
8	96.222.8038.4	96.222.8008.4	96.222.8098.4

RST20I2, CABLE ASSEMBLY, 2-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor	ultrasonically compressed
Lockable:	self-locking (unlocking by tool)	ends:	wire ends
Additional technical data, see facts & data.			

connection cable, female - free end, for pole socket

Cable color:	
Color of coding:	■ black
Application:	250 V
Marking of poles:	L, N

H05VV-F
halogenated
Eca

Length (m)	Art.No.
	■ black
3	99.506.0000.7
4	99.507.0000.7
5	99.508.0000.7
6	99.511.0000.7
9	99.534.0000.7

RST20I2, CABLE ASSEMBLY, 2-POLE

2.5 mm², 20 A



TECHNICAL DATA

Rated current:	20 A	type of construction:	Shrinkage tube
Degree of protection (IP):	IP66/68 (3m;2h)	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

connecting cable, female - male

Ölflex® Classic
110
halogenated

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V
Marking of poles: +, -

Length (m)	Art.No.
	■ Grey
1	96.223.1092.8
2	96.223.2092.8
3	96.223.3092.8
4	96.223.4092.8
5	96.223.5092.8
6	96.223.6092.8
7	96.223.7092.8
8	96.223.8092.8
	■ Grey
1	96.223.1092.4
2	96.223.2092.4
3	96.223.3092.4
4	96.223.4092.4
5	96.223.5092.4
6	96.223.6092.4
7	96.223.7092.4
8	96.223.8092.4

Cable color:
Color of coding: ■ signal brown
Application: ~50/-120 V
Marking of poles: 1, 2

TECHNICAL DATA

Rated current:	20 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h)	type of construction:	Shrinkage tube
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, female - free end

Ölflex® Classic
110
halogenated

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V
Marking of poles: +, -

Length (m)	Art.No.
	■ Grey
1	96.223.1097.8
2	96.223.2097.8
3	96.223.3097.8
4	96.223.4097.8
5	96.223.5097.8
6	96.223.6097.8
7	96.223.7097.8
8	96.223.8097.8
	■ Grey
1	96.223.1097.4
2	96.223.2097.4
3	96.223.3097.4
4	96.223.4097.4
5	96.223.5097.4
6	96.223.6097.4
7	96.223.7097.4
8	96.223.8097.4

Cable color:
Color of coding: ■ signal brown
Application: ~50/-120 V
Marking of poles: 1, 2



RST® CLASSIC

RST20I2, CABLE ASSEMBLY, 2-POLE

2.5 mm², 20 A



TECHNICAL DATA			
Rated current:	20 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h)	type of construction:	Shrinkage tube
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, male - free end

Ölflex® Classic
110
halogenated

Cable color:
Color of coding: ■ pebble grey
Application: ~50/-120 V
Marking of poles: +, -

Cable color:
Color of coding: ■ signal brown
Application: ~50/-120 V
Marking of poles: 1, 2

Length (m)	Art.No.
	■ Grey
1	96.223.1098.8
2	96.223.2098.8
3	96.223.3098.8
4	96.223.4098.8
5	96.223.5098.8
6	96.223.6098.8
7	96.223.7098.8
8	96.223.8098.8
	■ Grey
1	96.223.1098.4
2	96.223.2098.4
3	96.223.3098.4
4	96.223.4098.4
5	96.223.5098.4
6	96.223.6098.4
7	96.223.7098.4
8	96.223.8098.4

RST20I3, CONNECTOR, 3-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 6 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.4053.1	96.032.4053.1
□ light grey	250 V with PE	L, N, PE	96.031.4053.0	96.032.4053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.031.4055.7	96.032.4055.7
■ light blue	250/400 V	1, 2, 3	96.031.4053.9	96.032.4053.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.4051.4	96.032.4051.4

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.4153.1	96.032.4153.1
□ light grey	250 V with PE	L, N, PE	96.031.4153.0	96.032.4153.0
■ leaves green	250/400 V with PE	1, 2, PE	96.031.4155.7	96.032.4155.7
■ light blue	250/400 V	1, 2, 3	96.031.4153.9	96.032.4153.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.4151.4	96.032.4151.4

female



male



straight, for cables Ø 13-18 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.4553.1	96.032.4553.1
□ light grey	250 V with PE	L, N, PE	96.031.4553.0	96.032.4553.0
■ leaves green	250/400 V with PE	1, 2, PE	96.031.4555.7	96.032.4555.7
■ light blue	250/400 V	1, 2, 3	96.031.4553.9	96.032.4553.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.4551.4	96.032.4551.4

male



straight, for pole socket, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	male Art.No.
■ black	250 V with PE	L, N, PE	99.594.0000.7

female



male



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.033.4053.1	96.034.4053.1
□ light grey	250 V with PE	L, N, PE	96.033.4053.0	96.034.4053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.033.4055.7	96.034.4055.7
■ light blue	250/400 V	1, 2, 3	96.033.4053.9	96.034.4053.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.033.4051.4	96.034.4051.4

female



male



angled 90°, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.033.4153.1	96.034.4153.1
□ light grey	250 V with PE	L, N, PE	96.033.4153.0	96.034.4153.0
■ leaves green	250/400 V with PE	1, 2, PE	96.033.4155.7	96.034.4155.7
■ light blue	250/400 V	1, 2, 3	96.033.4153.9	96.034.4153.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.033.4151.4	96.034.4151.4

*) Alternative technical data, see facts & data.

RST20I3, CONNECTOR, 3-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 0,75 mm ² - 6 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



splitter connector, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.4253.1*	96.032.4253.1*
□ light grey	250 V with PE	L, N, PE	96.031.4253.0*	96.032.4253.0*
■ leaves green	250/400 V with PE	1, 2, PE	96.031.4255.7*	
■ light blue	250/400 V	1, 2, 3	96.031.4253.9*	
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.4251.4*	96.032.4251.4*

female



male



splitter connector, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.4353.1*	96.032.4353.1*
□ light grey	250 V with PE	L, N, PE	96.031.4353.0*	96.032.4353.0*
■ leaves green	250/400 V with PE	1, 2, PE	96.031.4355.7*	
■ light blue	250/400 V	1, 2, 3	96.031.4353.9*	

*) Alternative technical data, see facts & data.

RST20I3, CONNECTOR, 3-POLE

SPRING CLAMP CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,5 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,5 mm ² - 2,5 mm ²
Terminations per pole:	2	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.0053.1	96.032.0053.1
□ light grey	250 V with PE	L, N, PE	96.031.0053.0	96.032.0053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.031.0055.7	96.032.0055.7
■ light blue	250/400 V	1, 2, 3	96.031.0053.9	96.032.0053.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.0051.4	96.032.0051.4

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.0153.1	96.032.0153.1
□ light grey	250 V with PE	L, N, PE	96.031.0153.0	96.032.0153.0
■ leaves green	250/400 V with PE	1, 2, PE	96.031.0155.7	96.032.0155.7
■ light blue	250/400 V	1, 2, 3	96.031.0153.9	96.032.0153.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.0151.4	96.032.0151.4

female



male



straight, for cables Ø 13-18 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ leaves green	250/400 V with PE	1, 2, PE	96.031.0555.7	96.032.0555.7
■ light blue	250/400 V	1, 2, 3	96.031.0553.9	96.032.0553.9

female



male



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.033.0053.1	96.034.0053.1
□ light grey	250 V with PE	L, N, PE	96.033.0053.0	96.034.0053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.033.0055.7	96.034.0055.7
■ light blue	250/400 V	1, 2, 3	96.033.0053.9	96.034.0053.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.033.0051.4	96.034.0051.4

female



male



angled 90°, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.033.0153.1	96.034.0153.1
□ light grey	250 V with PE	L, N, PE	96.033.0153.0	96.034.0153.0
■ leaves green	250/400 V with PE	1, 2, PE	96.033.0155.7	96.034.0155.7
■ light blue	250/400 V	1, 2, 3	96.033.0153.9	96.034.0153.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.033.0151.4	96.034.0151.4

female



male



splitter connector, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.0253.1	96.032.0253.1
□ light grey	250 V with PE	L, N, PE	96.031.0253.0	
■ leaves green	250/400 V with PE	1, 2, PE	96.031.0255.7	
■ light blue	250/400 V	1, 2, 3	96.031.0253.9	
■ signal brown	~50/-120 V with PE	1, 2, PE		96.032.0251.4

RST20I3, CONNECTOR, 3-POLE

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 0,5 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 0,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



splitter connector, for cables Ø 10-14 mm			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250 V with PE	L, N, PE	96.031.0353.1	
□ light grey	250 V with PE	L, N, PE	96.031.0353.0	
■ leaves green	250/400 V with PE	1, 2, PE	96.031.0355.7	
■ light blue	250/400 V	1, 2, 3	96.031.0353.9	
■ signal brown	~50/-120 V with PE	1, 2, PE		96.032.0351.4

RST20I3, CONNECTOR, 3-POLE

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.131.0053.1	96.132.0053.1
□ light grey	250 V with PE	L, N, PE	96.131.0053.0	96.132.0053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.131.0055.7	96.132.0055.7

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.131.0153.1	96.132.0153.1
□ light grey	250 V with PE	L, N, PE	96.131.0153.0	96.132.0153.0
■ leaves green	250/400 V with PE	1, 2, PE	96.131.0155.7	

female



male



straight, for cables Ø 13-18 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.131.4553.1	96.132.4553.1
□ light grey	250 V with PE	L, N, PE	96.131.4553.0	96.132.4553.0

female



male



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
□ light grey	250 V with PE	L, N, PE	96.133.0053.0	96.134.0053.0

female



male



angled 90°, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.133.0153.1	96.134.0153.1
□ light grey	250 V with PE	L, N, PE	96.133.0153.0	96.134.0153.0

RST20I3, DEVICE CONNECTOR, M16, 3-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 6 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.6153.1	96.032.6153.1
□ light grey	250 V with PE	L, N, PE	96.031.6153.0	96.032.6153.0
■ leaves green	250/400 V with PE	1, 2, PE	96.031.6155.7	96.032.6155.7
■ light blue	250/400 V	1, 2, 3	96.031.6153.9	96.032.6153.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.6151.4	96.032.6151.4

female



male



modular, angled 7°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.035.6153.1	96.036.6153.1
□ light grey	250 V with PE	L, N, PE	96.035.6153.0	96.036.6153.0

SPRING CLAMP CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,5 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,5 mm ² - 2,5 mm ²
Terminations per pole:	2	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.2153.1	96.032.2153.1
□ light grey	250 V with PE	L, N, PE	96.031.2153.0	96.032.2153.0
■ leaves green	250/400 V with PE	1, 2, PE	96.031.2155.7	96.032.2155.7
■ light blue	250/400 V	1, 2, 3	96.031.2153.9	96.032.2153.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.2151.4	96.032.2151.4

female



male



modular, angled 7°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.035.2153.1	96.036.2153.1
□ light grey	250 V with PE	L, N, PE	96.035.2153.0	96.036.2153.0

RST20I3, DEVICE CONNECTOR, M16, 3-POLE

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm² - 4 mm²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250 V with PE	L, N, PE	96.131.2153.1	96.132.2153.1
□ light grey	250 V with PE	L, N, PE	96.131.2153.0	96.132.2153.0

female



male



modular, angled 7°			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250 V with PE	L, N, PE	96.135.2153.1	96.136.2153.1
□ light grey	250 V with PE	L, N, PE	96.135.2153.0	96.136.2153.0

RST20I3, DEVICE CONNECTOR, M20, 3-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 6 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.6053.1	96.032.6053.1
□ light grey	250 V with PE	L, N, PE	96.031.6053.0	96.032.6053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.031.6055.7	96.032.6055.7
■ light blue	250/400 V	1, 2, 3	96.031.6053.9	96.032.6053.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.6051.4	96.032.6051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.033.6053.1	96.034.6053.1
□ light grey	250 V with PE	L, N, PE	96.033.6053.0	96.034.6053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.033.6055.7	96.034.6055.7
■ light blue	250/400 V	1, 2, 3	96.033.6053.9	96.034.6053.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.033.6051.4	96.034.6051.4

SPRING CLAMP CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,5 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,5 mm ² - 2,5 mm ²
Terminations per pole:	2	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.2053.1	96.032.2053.1
□ light grey	250 V with PE	L, N, PE	96.031.2053.0	96.032.2053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.031.2055.7	96.032.2055.7
■ light blue	250/400 V	1, 2, 3	96.031.2053.9	96.032.2053.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.2051.4	96.032.2051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.033.2053.1	96.034.2053.1
□ light grey	250 V with PE	L, N, PE	96.033.2053.0	96.034.2053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.033.2055.7	96.034.2055.7
■ light blue	250/400 V	1, 2, 3	96.033.2053.9	96.034.2053.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.033.2051.4	96.034.2051.4

RST20I3, DEVICE CONNECTOR, M20, 3-POLE

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm² - 4 mm²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250 V with PE	L, N, PE	96.131.2053.1	96.132.2053.1
□ light grey	250 V with PE	L, N, PE	96.131.2053.0	96.132.2053.0

female



male



modular, angled 90°			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250 V with PE	L, N, PE	96.133.2053.1	96.134.2053.1
□ light grey	250 V with PE	L, N, PE	96.133.2053.0	96.134.2053.0

RST20I3, DEVICE CONNECTOR, M25, 3-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 6 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.5053.1	96.032.5053.1
□ light grey	250 V with PE	L, N, PE	96.031.5053.0	96.032.5053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.031.5055.7	96.032.5055.7
■ light blue	250/400 V	1, 2, 3	96.031.5053.9	96.032.5053.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.5051.4	96.032.5051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.033.6253.1	96.034.6253.1
□ light grey	250 V with PE	L, N, PE	96.033.6253.0	96.034.6253.0
■ leaves green	250/400 V with PE	1, 2, PE	96.033.6255.7	96.034.6255.7
■ light blue	250/400 V	1, 2, 3	96.033.6253.9	96.034.6253.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.033.6251.4	96.034.6251.4

SPRING CLAMP CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,5 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,5 mm ² - 2,5 mm ²
Terminations per pole:	2	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.031.1053.1	96.032.1053.1
□ light grey	250 V with PE	L, N, PE	96.031.1053.0	96.032.1053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.031.1055.7	96.032.1055.7
■ light blue	250/400 V	1, 2, 3	96.031.1053.9	96.032.1053.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.031.1051.4	96.032.1051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.033.2253.1	96.034.2253.1
□ light grey	250 V with PE	L, N, PE	96.033.2253.0	96.034.2253.0
■ leaves green	250/400 V with PE	1, 2, PE	96.033.2255.7	96.034.2255.7
■ light blue	250/400 V	1, 2, 3	96.033.2253.9	96.034.2253.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.033.2251.4	96.034.2251.4

RST20I3, DEVICE CONNECTOR, M25, 3-POLE

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm² - 4 mm²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.131.1053.1	96.132.1053.1
□ light grey	250 V with PE	L, N, PE	96.131.1053.0	96.132.1053.0
■ leaves green	250/400 V with PE	1, 2, PE	96.131.1055.7	96.132.1055.7

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	96.133.2253.1	96.134.2253.1
□ light grey	250 V with PE	L, N, PE	96.133.2253.0	96.134.2253.0

RST20I3, DISTRIBUTOR, 3-POLE



TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	

distribution block 1I / 30, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V with PE	L, N, PE	96.030.0153.1
□ light grey	250 V with PE	L, N, PE	96.030.0153.0
■ leaves green	250/400 V with PE	1, 2, PE	96.030.0155.7
■ light blue	250/400 V	1, 2, 3	96.030.0153.9
■ signal brown	~50/-120 V with PE	1, 2, PE	96.030.0151.4



distribution block 1I / 30, parallel connection, without fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V with PE	L, N, PE	96.030.0253.1
□ light grey	250 V with PE	L, N, PE	96.030.0253.0
■ leaves green	250/400 V with PE	1, 2, PE	96.030.0255.7
■ signal brown	~50/-120 V with PE	1, 2, PE	96.030.0251.4



compact distributor 1I / 30, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V with PE	L, N, PE	99.906.0000.7
■ signal brown	~50/-120 V with PE	1, 2, PE	99.606.0000.8



multi-distribution unit 1I / 70, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V with PE	L, N, PE	99.929.0000.7

RST20I3, CABLE ASSEMBLY, 3-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	type of construction:	Shrinkage tube
Degree of protection (IP):	IP66/68 (3m;2h)	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

connecting cable, female - male

Cable color:
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: L, N, PE

Cable color:
Color of coding: ■ leaves green
Application: 250/400 V with PE
Marking of poles: 1, 2, PE

Length (m)	H07RN-F halogenated Art.No.	H07RN-F - Enhanced Version halogen free Art.No.	H05VV-F halogenated Eca Art.No.
	■ black	■ black	■ black
1	96.232.1030.1	96.232.1050.1	96.232.1000.1
2	96.232.2030.1	96.232.2050.1	96.232.2000.1
3	96.232.3030.1	96.232.3050.1	96.232.3000.1
4	96.232.4030.1	96.232.4050.1	96.232.4000.1
5	96.232.5030.1	96.232.5050.1	96.232.5000.1
6	96.232.6030.1	96.232.6050.1	96.232.6000.1
7	96.232.7030.1	96.232.7050.1	96.232.7000.1
8	96.232.8030.1	96.232.8050.1	96.232.8000.1
Length (m)	■ black		■ black
	Art.No.		Art.No.
1	96.232.1031.7		96.232.1001.7
2	96.232.2031.7		96.232.2001.7
3	96.232.3031.7		96.232.3001.7
4	96.232.4031.7		96.232.4001.7
5	96.232.5031.7		96.232.5001.7
6	96.232.6031.7		96.232.6001.7
7	96.232.7031.7		96.232.7001.7
8	96.232.8031.7		96.232.8001.7



connecting cable, female - male

Cable color:
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: L, N, PE

Cable color:
Color of coding: ■ leaves green
Application: 250/400 V with PE
Marking of poles: 1, 2, PE

Length (m)	H05Z1Z1-F halogen free B2ca s1 d1 a1 Art.No.	H05Z1Z1-F halogen free Cca s1 d1 a1 Art.No.	H05Z1Z1-F halogen free Dca s1 d2 a1 Art.No.
	■ black	■ black	■ black
1	96.232.10B0.1	96.232.10C0.1	96.232.10D0.1
2	96.232.20B0.1	96.232.20C0.1	96.232.20D0.1
3	96.232.30B0.1		
4	96.232.40B0.1		
5	96.232.50B0.1		
6			
7			
8			
Length (m)	■ black	■ black	■ black
	Art.No.	Art.No.	Art.No.
1	96.232.10B1.7	96.232.10C1.7	96.232.10D1.7
2	96.232.20B1.7	96.232.20C1.7	96.232.20D1.7
3			
4			
5			
6			
7			
8			

RST20I3, CABLE ASSEMBLY, 3-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h)	type of construction:	Shrinkage tube
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color: ■ black
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: L, N, PE

Cable color: ■ leaves green
Color of coding: ■ leaves green
Application: 250/400 V with PE
Marking of poles: 1, 2, PE

Length (m)	H07RN-F halogenated Art.No.	H07RN-F - Enhanced Version halogen free Art.No.	H05VV-F halogenated Eca Art.No.
	Art.No.	Art.No.	Art.No.
1	96.232.1033.1	96.232.1053.1	96.232.1003.1
2	96.232.2033.1	96.232.2053.1	96.232.2003.1
3	96.232.3033.1	96.232.3053.1	96.232.3003.1
4	96.232.4033.1	96.232.4053.1	96.232.4003.1
5	96.232.5033.1	96.232.5053.1	96.232.5003.1
6	96.232.6033.1	96.232.6053.1	96.232.6003.1
7	96.232.7033.1	96.232.7053.1	96.232.7003.1
8	96.232.8033.1	96.232.8053.1	96.232.8003.1
1	96.232.1035.7		96.232.1005.7
2	96.232.2035.7		96.232.2005.7
3			96.232.3005.7
4	96.232.4035.7		96.232.4005.7
5	96.232.5035.7		96.232.5005.7
6	96.232.6035.7		96.232.6005.7
7	96.232.7035.7		96.232.7005.7
8	96.232.8035.7		96.232.8005.7

connection cable, female - free end

Cable color: ■ black
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: L, N, PE

Cable color: ■ leaves green
Color of coding: ■ leaves green
Application: 250/400 V with PE
Marking of poles: 1, 2, PE

Length (m)	H05Z1Z1-F halogen free B2ca s1 d1 a1 Art.No.	H05Z1Z1-F halogen free Cca s1 d1 a1 Art.No.	H05Z1Z1-F halogen free Dca s1 d2 a1 Art.No.
	Art.No.	Art.No.	Art.No.
1	96.232.10B3.1	96.232.10C3.1	96.232.10D3.1
2	96.232.20B3.1	96.232.20C3.1	96.232.20D3.1
3			
4			
5			
6			
7			
8			
1	96.232.10B5.7	96.232.10C5.7	96.232.10D5.7
2	96.232.20B5.7	96.232.20C5.7	96.232.20D5.7
3			
4			
5			
6			
7			
8			

RST20I3, CABLE ASSEMBLY, 3-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h)	type of construction:	Shrinkage tube
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, male - free end

Cable color: ■ black
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: L, N, PE

Cable color: ■ leaves green
Color of coding: ■ leaves green
Application: 250/400 V with PE
Marking of poles: 1, 2, PE

Length (m)	H07RN-F halogenated Art.No.	H07RN-F - Enhanced Version halogen free Art.No.	H05VV-F halogenated Eca Art.No.
	Art.No.	Art.No.	Art.No.
1	96.232.1034.1	96.232.1054.1	96.232.1004.1
2	96.232.2034.1	96.232.2054.1	96.232.2004.1
3	96.232.3034.1	96.232.3054.1	96.232.3004.1
4	96.232.4034.1	96.232.4054.1	96.232.4004.1
5	96.232.5034.1	96.232.5054.1	96.232.5004.1
6	96.232.6034.1	96.232.6054.1	96.232.6004.1
7	96.232.7034.1	96.232.7054.1	96.232.7004.1
8	96.232.8034.1	96.232.8054.1	96.232.8004.1
1	96.232.1036.7		96.232.1006.7
2	96.232.2036.7		96.232.2006.7
3	96.232.3036.7		96.232.3006.7
4	96.232.4036.7		96.232.4006.7
5	96.232.5036.7		96.232.5006.7
6	96.232.6036.7		96.232.6006.7
7	96.232.7036.7		96.232.7006.7
8	96.232.8036.7		96.232.8006.7

connection cable, male - free end

Cable color: ■ black
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: L, N, PE

Cable color: ■ leaves green
Color of coding: ■ leaves green
Application: 250/400 V with PE
Marking of poles: 1, 2, PE

Length (m)	H05Z1Z1-F halogen free B2ca s1 d1 a1 Art.No.	H05Z1Z1-F halogen free Cca s1 d1 a1 Art.No.	H05Z1Z1-F halogen free Dca s1 d2 a1 Art.No.
	Art.No.	Art.No.	Art.No.
1	96.232.10B4.1	96.232.10C4.1	96.232.10D4.1
2	96.232.20B4.1	96.232.20C4.1	96.232.20D4.1
3			
4			
5			
6			
7			
8			
1	96.232.10B6.7	96.232.10C6.7	96.232.10D6.7
2	96.232.20B6.7	96.232.20C6.7	96.232.20D6.7
3			
4			
5			
6			
7			
8			

RST20I3, CABLE ASSEMBLY, 3-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Lockable:	self-locking (unlocking by tool)	type of construction:	Shrinkage tube
		Additional technical data, see facts & data.	

mains connection cable, female - male CEE 7/4

		H07RN-F halogenated	H05VV-F halogenated
Length (m)	Art.No.	Art.No.	
		■ black	
	1.5	99.712.0000.7	
	2.5	99.713.0000.7	
	4	99.716.0000.7	
	5	99.718.0000.7	
	8	99.717.0000.7	
		■ Grey	
	1.5	99.714.0000.7	
	2.5	99.715.0000.7	

Cable color:
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: L, N, PE

Cable color:
Color of coding: □ light grey
Application: 250 V with PE
Marking of poles: L, N, PE



mains connection cable, male - female CEE 7/4

Length (m)	Art.No.
■ black	
0.5	99.719.0000.7

Cable color:
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: L, N, PE

RST20I3, CABLE ASSEMBLY, 3-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor	ultrasonically compressed
Lockable:	self-locking (unlocking by tool)	ends:	wire ends
Additional technical data, see facts & data.			

connection cable, female - free end, for pole socket

Cable color:	
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

H05VV-F
halogenated
Eca

Length (m)	Art.No.
	■ black
1	99.513.0000.7
2	99.514.0000.7
3	99.515.0000.7
4	99.516.0000.7
5	99.517.0000.7
6	99.518.0000.7
8	99.535.0000.7
9	99.533.0000.7

RST20I3, CABLE ASSEMBLY, 3-POLE

2.5 mm², 20 A



TECHNICAL DATA

Rated current:	20 A	type of construction:	Shrinkage tube
Degree of protection (IP):	IP66/68 (3m;2h)	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

connecting cable, female - male

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

Cable color:	■ leaves green
Color of coding:	■ leaves green
Application:	250/400 V with PE
Marking of poles:	1, 2, PE

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free B2ca s1 d1 a1
	Art.No.	Art.No.	Art.No.
1	96.233.1030.1	96.233.1000.1	96.233.10B0.1
2	96.233.2030.1	96.233.2000.1	96.233.20B0.1
3	96.233.3030.1	96.233.3000.1	96.233.30B0.1
4	96.233.4030.1	96.233.4000.1	
5	96.233.5030.1	96.233.5000.1	
6	96.233.6030.1	96.233.6000.1	
7	96.233.7030.1	96.233.7000.1	
8	96.233.8030.1	96.233.8000.1	
1	96.233.1031.7	96.233.1001.7	96.233.10B1.7
2	96.233.2031.7	96.233.2001.7	96.233.20B1.7
3	96.233.3031.7	96.233.3001.7	
4	96.233.4031.7	96.233.4001.7	
5	96.233.5031.7	96.233.5001.7	
6	96.233.6031.7	96.233.6001.7	
7	96.233.7031.7	96.233.7001.7	
8	96.233.8031.7	96.233.8001.7	



connecting cable, female - male

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	L, N, PE

Cable color:	■ leaves green
Color of coding:	■ leaves green
Application:	250/400 V with PE
Marking of poles:	1, 2, PE

Length (m)	H05Z1Z1-F halogen free Cca s1 d1 a1	H05Z1Z1-F halogen free Dca s1 d2 a1	H05Z1Z1-F halogen free Eca
	Art.No.	Art.No.	Art.No.
1	96.233.10C0.1	96.233.10D0.1	96.233.10G0.1
2	96.233.20C0.1	96.233.20D0.1	96.233.20G0.1
3			96.233.30G0.1
4			96.233.40G0.1
5		96.233.50D0.1	96.233.50G0.1
6		96.233.60D0.1	96.233.60G0.1
7			96.233.70G0.1
8			96.233.80G0.1
1	96.233.10C1.7	96.233.10D1.7	
2	96.233.20C1.7	96.233.20D1.7	
3			
4			
5			
6			
7			
8			

RST20I3, CABLE ASSEMBLY, 3-POLE

2.5 mm², 20 A



TECHNICAL DATA

Rated current:	20 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h)	type of construction:	Shrinkage tube
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color: ■ black
 Color of coding: ■ black
 Application: 250 V with PE
 Marking of poles: L, N, PE

Cable color: ■ leaves green
 Color of coding: ■ leaves green
 Application: 250/400 V with PE
 Marking of poles: 1, 2, PE

	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free B2ca s1 d1 a1
Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	■ black
1	96.233.1033.1	96.233.1003.1	96.233.10B3.1
2	96.233.2033.1	96.233.2003.1	96.233.20B3.1
3	96.233.3033.1	96.233.3003.1	
4	96.233.4033.1	96.233.4003.1	
5	96.233.5033.1	96.233.5003.1	
6	96.233.6033.1	96.233.6003.1	
7	96.233.7033.1	96.233.7003.1	
8	96.233.8033.1	96.233.8003.1	
	■ leaves green	■ leaves green	■ leaves green
1	96.233.1035.7	96.233.1005.7	96.233.10B5.7
2	96.233.2035.7	96.233.2005.7	96.233.20B5.7
3	96.233.3035.7	96.233.3005.7	
4	96.233.4035.7	96.233.4005.7	
5	96.233.5035.7	96.233.5005.7	
6	96.233.6035.7	96.233.6005.7	
7	96.233.7035.7	96.233.7005.7	
8	96.233.8035.7	96.233.8005.7	



connection cable, female - free end

Cable color: ■ black
 Color of coding: ■ black
 Application: 250 V with PE
 Marking of poles: L, N, PE

Cable color: ■ leaves green
 Color of coding: ■ leaves green
 Application: 250/400 V with PE
 Marking of poles: 1, 2, PE

	H05Z1Z1-F halogen free Cca s1 d1 a1	H05Z1Z1-F halogen free Dca s1 d2 a1	H05Z1Z1-F halogen free Eca
Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	■ black
1	96.233.10C3.1	96.233.10D3.1	96.233.10G3.1
2	96.233.20C3.1	96.233.20D3.1	96.233.20G3.1
3			96.233.30G3.1
4			96.233.40G3.1
5			96.233.50G3.1
6			96.233.60G3.1
7			96.233.70G3.1
8			96.233.80G3.1
	■ leaves green	■ leaves green	
1	96.233.10C5.7	96.233.10D5.7	
2	96.233.20C5.7	96.233.20D5.7	
3			
4			
5			
6			
7			
8			

RST20I3, CABLE ASSEMBLY, 3-POLE

2.5 mm², 20 A



TECHNICAL DATA

Rated current:	20 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h)	type of construction:	Shrinkage tube
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, male - free end

Cable color: black
Color of coding: black
Application: 250 V with PE
Marking of poles: L, N, PE

Cable color: leaves green
Color of coding: leaves green
Application: 250/400 V with PE
Marking of poles: 1, 2, PE

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca	H05Z1Z1-F halogen free B2ca s1 d1 a1
	Art.No.	Art.No.	Art.No.
1	96.233.1034.1	96.233.1004.1	96.233.10B4.1
2	96.233.2034.1	96.233.2004.1	96.233.20B4.1
3	96.233.3034.1	96.233.3004.1	
4	96.233.4034.1	96.233.4004.1	
5	96.233.5034.1	96.233.5004.1	
6	96.233.6034.1	96.233.6004.1	
7	96.233.7034.1	96.233.7004.1	
8	96.233.8034.1	96.233.8004.1	
1	96.233.1036.7	96.233.1006.7	96.233.10B6.7
2	96.233.2036.7	96.233.2006.7	96.233.20B6.7
3	96.233.3036.7	96.233.3006.7	
4	96.233.4036.7	96.233.4006.7	
5	96.233.5036.7	96.233.5006.7	
6	96.233.6036.7	96.233.6006.7	
7	96.233.7036.7	96.233.7006.7	
8	96.233.8036.7	96.233.8006.7	



connection cable, male - free end

Cable color: black
Color of coding: black
Application: 250 V with PE
Marking of poles: L, N, PE

Cable color: leaves green
Color of coding: leaves green
Application: 250/400 V with PE
Marking of poles: 1, 2, PE

Length (m)	H05Z1Z1-F halogen free Cca s1 d1 a1	H05Z1Z1-F halogen free Dca s1 d2 a1	H05Z1Z1-F halogen free Eca
	Art.No.	Art.No.	Art.No.
1	96.233.10C4.1	96.233.10D4.1	96.233.10E4.1
2	96.233.20C4.1	96.233.20D4.1	
3			96.233.30E4.1
4			
5			96.233.50E4.1
6			
7			
8			
1	96.233.10C6.7	96.233.10D6.7	
2	96.233.20C6.7	96.233.20D6.7	
3			
4			
5			
6			
7			
8			

RST20I4, CONNECTOR, 4-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.041.4053.1	96.042.4053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.041.4053.0	96.042.4053.0
■ signal brown	~50/-120 V	1, 2, 3, 4	96.041.4051.4	96.042.4051.4

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.041.4153.1	96.042.4153.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.041.4153.0	96.042.4153.0
■ signal brown	~50/-120 V	1, 2, 3, 4	96.041.4151.4	96.042.4151.4

female



male



straight, for cables Ø 13-18 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.041.4553.1	96.042.4553.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.041.4553.0	96.042.4553.0

female



male



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.043.4053.1	96.044.4053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.043.4053.0	96.044.4053.0

female



male



angled 90°, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.043.4153.1	96.044.4153.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.043.4153.0	96.044.4153.0

female



splitter connector, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.041.4253.1*
□ light grey	250/400 V with PE	1, 2, 3, PE	96.041.4253.0*

*) Alternative technical data, see facts & data.

RST20I4, CONNECTOR, 4-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded:
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Connection cross section solid:
Lockable:	self-locking (unlocking by tool)	0,75 mm ² - 4 mm ²
		Additional technical data, see facts & data.

female



male



splitter connector, for cables Ø 10-14 mm			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.041.4353.1*	96.042.4353.1*
□ light grey	250/400 V with PE	1, 2, 3, PE	96.041.4353.0*	

*) Alternative technical data, see facts & data.

RST20I4, CONNECTOR, 4-POLE

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.141.0053.1	96.142.0053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.141.0053.0	96.142.0053.0

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.141.0153.1	96.142.0153.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.141.0153.0	96.142.0153.0

female



male



straight, for cables Ø 13-18 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.141.0553.1	96.142.0553.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.141.0553.0	96.142.0553.0

female



male



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.143.0053.1	96.144.0053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.143.0053.0	96.144.0053.0

female



male



angled 90°, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.143.0153.1	96.144.0153.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.143.0153.0	96.144.0153.0

RST20I4, DEVICE CONNECTOR, M16, 4-POLE

SCREW CONNECTION

TECHNICAL DATA			
Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.041.6153.1	96.042.6153.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.041.6153.0	96.042.6153.0

female



male



modular, angled 7°			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.045.6153.1	96.046.6153.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.045.6153.0	96.046.6153.0

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.141.2153.1	96.142.2153.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.141.2153.0	96.142.2153.0

RST20I4, DEVICE CONNECTOR, M20, 4-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.041.6053.1	96.042.6053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.041.6053.0	96.042.6053.0
■ signal brown	~50/-120 V	1, 2, 3, 4	96.041.6051.4	96.042.6051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.043.6053.1	96.044.6053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.043.6053.0	96.044.6053.0
■ signal brown	~50/-120 V	1, 2, 3, 4	96.043.6051.4	96.044.6051.4

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.141.2053.1	96.142.2053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.141.2053.0	96.142.2053.0

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.143.2053.1	96.144.2053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.143.2053.0	96.144.2053.0

RST20I4, DEVICE CONNECTOR, M25, 4-POLE

SCREW CONNECTION

TECHNICAL DATA			
Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.041.5053.1	96.042.5053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.041.5053.0	96.042.5053.0
■ signal brown	~50/-120 V	1, 2, 3, 4	96.041.5051.4	96.042.5051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.043.6253.1	96.044.6253.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.043.6253.0	96.044.6253.0
■ signal brown	~50/-120 V	1, 2, 3, 4	96.043.6251.4	96.044.6251.4

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.141.1053.1	96.142.1053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.141.1053.0	96.142.1053.0

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	96.143.2253.1	96.144.2253.1
□ light grey	250/400 V with PE	1, 2, 3, PE	96.143.2253.0	96.144.2253.0

RST20I4, DISTRIBUTOR, 4-POLE



TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP): IP66/68 (3m;2h) /IP69		Additional technical data, see facts & data.	

compact distributor 1I / 3O, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	99.911.0000.7
■ signal brown	~50/-120 V	1, 2, 3, 4	96.040.0151.4

RST20I4, CABLE ASSEMBLY, 4-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

connecting cable, female - male

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, PE

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	96.442.1030.1	96.442.1000.1
2	96.442.2030.1	96.442.2000.1
3	96.442.3030.1	96.442.3000.1
4	96.442.4030.1	96.442.4000.1
5	96.442.5030.1	96.442.5000.1
6	96.442.6030.1	96.442.6000.1
7	96.442.7030.1	96.442.7000.1
8	96.442.8030.1	96.442.8000.1



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, PE

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	96.442.1033.1	96.442.1003.1
2	96.442.2033.1	96.442.2003.1
3	96.442.3033.1	96.442.3003.1
4	96.442.4033.1	96.442.4003.1
5	96.442.5033.1	96.442.5003.1
6	96.442.6033.1	96.442.6003.1
7	96.442.7033.1	96.442.7003.1
8	96.442.8033.1	96.442.8003.1

RST20I4, CABLE ASSEMBLY, 4-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, male - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, PE

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	96.442.1034.1	96.442.1004.1
2	96.442.2034.1	96.442.2004.1
3	96.442.3034.1	96.442.3004.1
4	96.442.4034.1	96.442.4004.1
5	96.442.5034.1	96.442.5004.1
6	96.442.6034.1	96.442.6004.1
7	96.442.7034.1	96.442.7004.1
8	96.442.8034.1	96.442.8004.1

RST20I4, CABLE ASSEMBLY, 4-POLE

2.5 mm², 20 A



TECHNICAL DATA

Rated current:	20 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

connecting cable, female - male

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, PE

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	96.443.1030.1	96.443.1000.1
2	96.443.2030.1	96.443.2000.1
3	96.443.3030.1	96.443.3000.1
4	96.443.4030.1	96.443.4000.1
5	96.443.5030.1	96.443.5000.1
6	96.443.6030.1	96.443.6000.1
7	96.443.7030.1	96.443.7000.1
8	96.443.8030.1	96.443.8000.1



TECHNICAL DATA

Rated current:	20 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, PE

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	96.443.1033.1	96.443.1003.1
2	96.443.2033.1	96.443.2003.1
3	96.443.3033.1	96.443.3003.1
4	96.443.4033.1	96.443.4003.1
5	96.443.5033.1	96.443.5003.1
6	96.443.6033.1	96.443.6003.1
7	96.443.7033.1	96.443.7003.1
8	96.443.8033.1	96.443.8003.1

RST® CLASSIC

RST20I4, CABLE ASSEMBLY, 4-POLE

2.5 mm², 20 A



TECHNICAL DATA

Rated current:	20 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, male - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, PE

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	96.443.1034.1	96.443.1004.1
2	96.443.2034.1	96.443.2004.1
3	96.443.3034.1	96.443.3004.1
4	96.443.4034.1	96.443.4004.1
5	96.443.5034.1	96.443.5004.1
6	96.443.6034.1	96.443.6004.1
7	96.443.7034.1	96.443.7004.1
8	96.443.8034.1	96.443.8004.1

RST20I5, CONNECTOR, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 0,75 mm ² - 4 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.051.4053.1	96.052.4053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.051.4053.0	96.052.4053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.051.4053.9	96.052.4053.9
■ pebble grey	250/400 V	N, E, 1, 2, 3	96.051.4053.8	96.052.4053.8
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.051.4053.6	96.052.4053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.051.4051.4	96.052.4051.4

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.051.4153.1	96.052.4153.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.051.4153.0	96.052.4153.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.051.4153.9	96.052.4153.9
■ pebble grey	250/400 V	N, E, 1, 2, 3	96.051.4153.8	96.052.4153.8
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.051.4153.6	96.052.4153.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.051.4151.4	96.052.4151.4

female



male



straight, for cables Ø 13-18 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.051.4553.1	96.052.4553.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.051.4553.0	96.052.4553.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.051.4553.9	96.052.4553.9
■ pebble grey	250/400 V	N, E, 1, 2, 3	96.051.4553.8	96.052.4553.8
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.051.4553.6	96.052.4553.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.051.4551.4	96.052.4551.4

female



male



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.053.4053.1	96.054.4053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.053.4053.0	96.054.4053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.053.4053.9	96.054.4053.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.053.4053.6	96.054.4053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.053.4051.4	96.054.4051.4

female



male



angled 90°, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.053.4153.1	96.054.4153.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.053.4153.0	96.054.4153.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.053.4153.9	96.054.4153.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.053.4153.6	96.054.4153.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.053.4151.4	96.054.4151.4

female



male



splitter connector, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.051.4253.1*	96.052.4253.1*
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.051.4253.0*	96.052.4253.0*
■ light blue	250/400 V	1, 2, 3, 4, 5	96.051.4253.9*	
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.051.4253.6*	96.052.4253.6*
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.051.4251.4*	96.052.4251.4*

*) Alternative technical data, see facts & data.

RST20I5, CONNECTOR, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded:
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Connection cross section solid:
Lockable:	self-locking (unlocking by tool)	0,75 mm ² - 4 mm ²
		Additional technical data, see facts & data.

female



male



splitter connector, for cables Ø 10-14 mm

			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.051.4353.1*	96.052.4353.1*
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.051.4353.0*	96.052.4353.0*
■ light blue	250/400 V	1, 2, 3, 4, 5	96.051.4353.9*	
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.051.4353.6*	96.052.4353.6*
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.051.4351.4*	

*) Alternative technical data, see facts & data.

RST20I5, CONNECTOR, 5-POLE

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data,	see facts & data.

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.151.0053.1	96.152.0053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.151.0053.0	96.152.0053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.151.0053.9	96.152.0053.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.151.0053.6	96.152.0053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.151.0051.4	96.152.0051.4

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.151.0153.1	96.152.0153.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.151.0153.0	96.152.0153.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.151.0153.9	96.152.0153.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.151.0153.6	96.152.0153.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.151.0151.4	96.152.0151.4

female



male



straight, for cables Ø 13-18 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.151.0553.1	96.152.0553.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.151.0553.0	96.152.0553.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.151.0553.9	96.152.0553.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.151.0553.6	96.152.0553.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.151.0551.4	96.152.0551.4

female



male



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.153.0053.1	96.154.0053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.153.0053.0	96.154.0053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.153.0053.9	96.154.0053.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.153.0053.6	96.154.0053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.153.0051.4	96.154.0051.4

female



male



angled 90°, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.153.0153.1	96.154.0153.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.153.0153.0	96.154.0153.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.153.0153.9	96.154.0153.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.153.0153.6	96.154.0153.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.153.0151.4	96.154.0151.4

RST20I5, DEVICE CONNECTOR, M16, 5-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.051.6153.1	96.052.6153.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.051.6153.0	96.052.6153.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.051.6153.9	96.052.6153.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.051.6153.6	96.052.6153.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.051.6151.4	96.052.6151.4

female



male



modular, angled 7°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.055.6153.1	96.056.6153.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.055.6153.0	96.056.6153.0
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.055.6153.6	96.056.6153.6

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.151.2153.1	96.152.2153.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.151.2153.0	96.152.2153.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.151.2153.9	96.152.2153.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.151.2153.6	96.152.2153.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.151.2151.4	96.152.2151.4

female



male



modular, angled 7°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.155.2153.0	96.156.2153.0

RST20I5, DEVICE CONNECTOR, M20, 5-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.051.6053.1	96.052.6053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.051.6053.0	96.052.6053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.051.6053.9	96.052.6053.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.051.6053.6	96.052.6053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.051.6051.4	96.052.6051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.053.6053.1	96.054.6053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.053.6053.0	96.054.6053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.053.6053.9	96.054.6053.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.053.6053.6	96.054.6053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.053.6051.4	96.054.6051.4

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.151.2053.1	96.152.2053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.151.2053.0	96.152.2053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.151.2053.9	96.152.2053.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.151.2053.6	96.152.2053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.151.2051.4	96.152.2051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.153.2053.1	96.154.2053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.153.2053.0	96.154.2053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.153.2053.9	96.154.2053.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.153.2053.6	96.154.2053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.153.2051.4	96.154.2051.4

RST2015, DEVICE CONNECTOR, M25, 5-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.051.5053.1	96.052.5053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.051.5053.0	96.052.5053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.051.5053.9	96.052.5053.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.051.5053.6	96.052.5053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.051.5051.4	96.052.5051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.053.6253.1	96.054.6253.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.053.6253.0	96.054.6253.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.053.6253.9	96.054.6253.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.053.6253.6	96.054.6253.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.053.6251.4	96.054.6251.4

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.151.1053.1	96.152.1053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.151.1053.0	96.152.1053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.151.1053.9	96.152.1053.9
■ pebble grey	250/400 V	N, E, 1, 2, 3	96.151.1053.8	96.152.1053.8
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.151.1053.6	96.152.1053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.151.1051.4	96.152.1051.4

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.153.2253.1	96.154.2253.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.153.2253.0	96.154.2253.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.153.2253.9	96.154.2253.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.153.2253.6	96.154.2253.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	96.153.2251.4	96.154.2251.4

RST2015, DISTRIBUTOR, 5-POLE

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	




compact distributor 11 / 20, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.050.1153.1



compact distributor 11 / 30, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.050.0153.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	96.050.0153.0
■ light blue	250/400 V	1, 2, 3, 4, 5	96.050.0153.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	96.050.0153.6

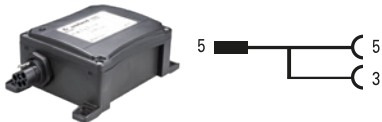

compact distributor phase selection L1, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.050.3153.1




compact distributor phase selection L2, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.050.4153.1



compact distributor phase selection L3, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.050.5153.1

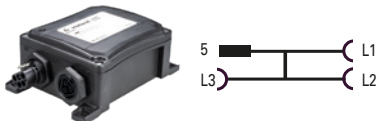


compact distributor phase selection L1, L2, L3, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.050.6153.1




multi-distribution unit 11 / 50, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.050.2153.1



multi-distribution unit phase selection L1, L2, L3, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	99.902.0000.7



multi-distribution unit phase selection 2x L1, L2, L3, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	96.050.7153.1

RST20I5, CABLE ASSEMBLY, 5-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

connecting cable, female - male

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, N, PE

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	D1, D2, L, PE, N

H07RN-F

halogenated

Length (m)	Art.No.	Art.No.	Art.No.
	■ black	■ black	■ black
1	96.452.1030.1	96.452.1050.1	96.452.1000.1
2	96.452.2030.1	96.452.2050.1	96.452.2000.1
3	96.452.3030.1	96.452.3050.1	96.452.3000.1
4	96.452.4030.1	96.452.4050.1	96.452.4000.1
5	96.452.5030.1	96.452.5050.1	96.452.5000.1
6	96.452.6030.1	96.452.6050.1	96.452.6000.1
7	96.452.7030.1	96.452.7050.1	96.452.7000.1
8	96.452.8030.1	96.452.8050.1	96.452.8000.1
	■ black		■ black
1	96.452.1030.6		96.452.1000.6
2	96.452.2030.6		96.452.2000.6
3	96.452.3030.6		96.452.3000.6
4	96.452.4030.6		96.452.4000.6
5	96.452.5030.6		96.452.5000.6
6	96.452.6030.6		96.452.6000.6
7	96.452.7030.6		96.452.7000.6
8	96.452.8030.6		96.452.8000.6

H07RN-F - Enhanced Version

halogen free

H05VV-F

halogenated Eca

connecting cable, female - male

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, N, PE

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	D1, D2, L, PE, N

H05Z1Z1-F

halogen free

B2ca s1 d1 a1

Length (m)	Art.No.	Art.No.
	■ black	■ black
1	96.452.10B0.1	96.452.10C0.1
2	96.452.20B0.1	96.452.20C0.1
3	96.452.30B0.1	96.452.30C0.1
4	96.452.40B0.1	96.452.40C0.1
5	96.452.50B0.1	96.452.50C0.1
6	96.452.60B0.1	96.452.60C0.1
7	96.452.70B0.1	96.452.70C0.1
8	96.452.80B0.1	96.452.80C0.1
	■ black	■ black
1	96.452.10B0.6	96.452.10C0.6
2	96.452.20B0.6	96.452.20C0.6
3	96.452.30B0.6	96.452.30C0.6
4	96.452.40B0.6	96.452.40C0.6
5	96.452.50B0.6	96.452.50C0.6
6	96.452.60B0.6	96.452.60C0.6
7	96.452.70B0.6	96.452.70C0.6
8	96.452.80B0.6	96.452.80C0.6

H05Z1Z1-F

halogen free

Cca s1 d1 a1

RST20I5, CABLE ASSEMBLY, 5-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color: black
Color of coding: black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: black
Color of coding: turquoise blue
Application: 250 V with PE
Marking of poles: D1, D2, L, PE, N

	H07RN-F	H07RN-F - Enhanced Version	H05VV-F
	halogenated	halogen free	halogenated Eca
Length (m)	Art.No.	Art.No.	Art.No.
1	96.452.1033.1	96.452.1053.1	96.452.1003.1
2	96.452.2033.1	96.452.2053.1	96.452.2003.1
3	96.452.3033.1	96.452.3053.1	96.452.3003.1
4	96.452.4033.1	96.452.4053.1	96.452.4003.1
5	96.452.5033.1	96.452.5053.1	96.452.5003.1
6	96.452.6033.1	96.452.6053.1	96.452.6003.1
7	96.452.7033.1	96.452.7053.1	96.452.7003.1
8	96.452.8033.1	96.452.8053.1	96.452.8003.1
1	96.452.1033.6		96.452.1003.6
2	96.452.2033.6		96.452.2003.6
3	96.452.3033.6		96.452.3003.6
4	96.452.4033.6		96.452.4003.6
5	96.452.5033.6		96.452.5003.6
6	96.452.6033.6		96.452.6003.6
7	96.452.7033.6		96.452.7003.6
8	96.452.8033.6		96.452.8003.6



connection cable, female - free end

Cable color: black
Color of coding: black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: black
Color of coding: turquoise blue
Application: 250 V with PE
Marking of poles: D1, D2, L, PE, N

	H05Z1Z1-F	H05Z1Z1-F
	halogen free	halogen free
	B2ca s1 d1 a1	Cca s1 d1 a1
Length (m)	Art.No.	Art.No.
1	96.452.10B3.1	96.452.10C3.1
2	96.452.20B3.1	96.452.20C3.1
3	96.452.30B3.1	96.452.30C3.1
4	96.452.40B3.1	96.452.40C3.1
5	96.452.50B3.1	96.452.50C3.1
6	96.452.60B3.1	96.452.60C3.1
7	96.452.70B3.1	96.452.70C3.1
8	96.452.80B3.1	96.452.80C3.1
1	96.452.10B3.6	96.452.10C3.6
2	96.452.20B3.6	96.452.20C3.6
3	96.452.30B3.6	96.452.30C3.6
4	96.452.40B3.6	96.452.40C3.6
5	96.452.50B3.6	96.452.50C3.6
6	96.452.60B3.6	96.452.60C3.6
7	96.452.70B3.6	96.452.70C3.6
8		

RST20I5, CABLE ASSEMBLY, 5-POLE

1.5 mm², 16 A



TECHNICAL DATA

Rated current:	16 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, male - free end

Cable color: ■ black
Color of coding: ■ black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: ■ black
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: D1, D2, L, PE, N

Length (m)	H07RN-F halogenated Art.No.	H07RN-F - Enhanced Version halogen free Art.No.	H05VV-F halogenated Eca Art.No.
	Art.No.	Art.No.	Art.No.
1	96.452.1034.1	96.452.1054.1	96.452.1004.1
2	96.452.2034.1	96.452.2054.1	96.452.2004.1
3	96.452.3034.1	96.452.3054.1	96.452.3004.1
4	96.452.4034.1	96.452.4054.1	96.452.4004.1
5	96.452.5034.1	96.452.5054.1	96.452.5004.1
6	96.452.6034.1	96.452.6054.1	96.452.6004.1
7	96.452.7034.1	96.452.7054.1	96.452.7004.1
8	96.452.8034.1	96.452.8054.1	96.452.8004.1
1	96.452.1034.6		96.452.1004.6
2	96.452.2034.6		96.452.2004.6
3	96.452.3034.6		96.452.3004.6
4	96.452.4034.6		96.452.4004.6
5	96.452.5034.6		96.452.5004.6
6	96.452.6034.6		96.452.6004.6
7	96.452.7034.6		96.452.7004.6
8	96.452.8034.6		96.452.8004.6

connection cable, male - free end

Cable color: ■ black
Color of coding: ■ black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: ■ black
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: D1, D2, L, PE, N

Length (m)	H05Z1Z1-F halogen free B2ca s1 d1 a1 Art.No.	H05Z1Z1-F halogen free Cca s1 d1 a1 Art.No.
	Art.No.	Art.No.
1	96.452.10B4.1	96.452.10C4.1
2	96.452.20B4.1	96.452.20C4.1
3	96.452.30B4.1	96.452.30C4.1
4	96.452.40B4.1	96.452.40C4.1
5	96.452.50B4.1	96.452.50C4.1
6	96.452.60B4.1	96.452.60C4.1
7	96.452.70B4.1	96.452.70C4.1
8	96.452.80B4.1	96.452.80C4.1
1	96.452.10B4.6	96.452.10C4.6
2	96.452.20B4.6	96.452.20C4.6
3	96.452.30B4.6	96.452.30C4.6
4	96.452.40B4.6	96.452.40C4.6
5	96.452.50B4.6	96.452.50C4.6
6		
7	96.452.70B4.6	96.452.70C4.6
8	96.452.80B4.6	96.452.80C4.6

RST20I5, CABLE ASSEMBLY, 5-POLE

2.5 mm², 20 A



TECHNICAL DATA

Rated current:	20 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

connecting cable, female - male

Cable color: ■ black
 Color of coding: ■ black
 Application: 250/400 V with PE
 Marking of poles: 1, 2, 3, N, PE

Cable color: ■ black
 Color of coding: ■ black
 Application: 250 V with PE
 Marking of poles: D1, D2, L, PE, N

	H07RN-F	H07RN-F - Enhanced Version	H05VV-F
	halogenated	halogen free	halogenated Eca
Length (m)	Art.No.	Art.No.	Art.No.
1	96.453.1030.1	96.453.1050.1	96.453.1000.1
2	96.453.2030.1	96.453.2050.1	96.453.2000.1
3	96.453.3030.1	96.453.3050.1	96.453.3000.1
4	96.453.4030.1	96.453.4050.1	96.453.4000.1
5	96.453.5030.1	96.453.5050.1	96.453.5000.1
6	96.453.6030.1	96.453.6050.1	96.453.6000.1
7	96.453.7030.1	96.453.7050.1	96.453.7000.1
8	96.453.8030.1	96.453.8050.1	96.453.8000.1
1	96.453.1030.6		96.453.1000.6
2	96.453.2030.6		96.453.2000.6
3	96.453.3030.6		96.453.3000.6
4	96.453.4030.6		96.453.4000.6
5	96.453.5030.6		96.453.5000.6
6	96.453.6030.6		96.453.6000.6
7	96.453.7030.6		96.453.7000.6
8	96.453.8030.6		96.453.8000.6

connecting cable, female - male

Cable color: ■ black
 Color of coding: ■ black
 Application: 250/400 V with PE
 Marking of poles: 1, 2, 3, N, PE

Cable color: ■ black
 Color of coding: ■ black
 Application: 250 V with PE
 Marking of poles: D1, D2, L, PE, N

	H05Z1Z1-F	H05Z1Z1-F	H05Z1Z1-F
	halogen free	halogen free	halogen free
	B2ca s1 d1 a1	Cca s1 d1 a1	Dca s1 d2 a1
Length (m)	Art.No.	Art.No.	Art.No.
1	96.453.10B0.1	96.453.10C0.1	96.453.10D0.1
2	96.453.20B0.1	96.453.20C0.1	96.453.20D0.1
3	96.453.30B0.1	96.453.30C0.1	96.453.30D0.1
4	96.453.40B0.1	96.453.40C0.1	96.453.40D0.1
5	96.453.50B0.1	96.453.50C0.1	96.453.50D0.1
6	96.453.60B0.1	96.453.60C0.1	96.453.60D0.1
7	96.453.70B0.1	96.453.70C0.1	96.453.70D0.1
8	96.453.80B0.1	96.453.80C0.1	
1	96.453.10B0.6	96.453.10C0.6	96.453.10D0.6
2	96.453.20B0.6	96.453.20C0.6	96.453.20D0.6
3	96.453.30B0.6	96.453.30C0.6	96.453.30D0.6
4	96.453.40B0.6	96.453.40C0.6	96.453.40D0.6
5	96.453.50B0.6	96.453.50C0.6	96.453.50D0.6
6	96.453.60B0.6	96.453.60C0.6	96.453.60D0.6
7	96.453.70B0.6	96.453.70C0.6	96.453.70D0.6
8	96.453.80B0.6	96.453.80C0.6	96.453.80D0.6

RST20I5, CABLE ASSEMBLY, 5-POLE

2.5 mm², 20 A



TECHNICAL DATA

Rated current:	20 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color: ■ black
Color of coding: ■ black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: ■ black
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: D1, D2, L, PE, N

	H07RN-F	H07RN-F - Enhanced Version	H05VV-F
	halogenated	halogen free	halogenated Eca
Length (m)	Art.No.	Art.No.	Art.No.
1	96.453.1033.1	96.453.1053.1	96.453.1003.1
2	96.453.2033.1	96.453.2053.1	96.453.2003.1
3	96.453.3033.1	96.453.3053.1	96.453.3003.1
4	96.453.4033.1	96.453.4053.1	96.453.4003.1
5	96.453.5033.1	96.453.5053.1	96.453.5003.1
6	96.453.6033.1	96.453.6053.1	96.453.6003.1
7	96.453.7033.1	96.453.7053.1	96.453.7003.1
8	96.453.8033.1	96.453.8053.1	96.453.8003.1
1	96.453.1033.6		96.453.1003.6
2	96.453.2033.6		96.453.2003.6
3	96.453.3033.6		96.453.3003.6
4	96.453.4033.6		96.453.4003.6
5	96.453.5033.6		96.453.5003.6
6	96.453.6033.6		96.453.6003.6
7	96.453.7033.6		96.453.7003.6
8	96.453.8033.6		96.453.8003.6

connection cable, female - free end

Cable color: ■ black
Color of coding: ■ black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: ■ black
Color of coding: ■ black
Application: 250 V with PE
Marking of poles: D1, D2, L, PE, N

	H05Z1Z1-F halogen free	H05Z1Z1-F halogen free	H05Z1Z1-F halogen free
	B2ca s1 d1 a1	Cca s1 d1 a1	Dca s1 d2 a1
Length (m)	Art.No.	Art.No.	Art.No.
1	96.453.10B3.1	96.453.10C3.1	96.453.10D3.1
2	96.453.20B3.1	96.453.20C3.1	96.453.20D3.1
3	96.453.30B3.1	96.453.30C3.1	96.453.30D3.1
4	96.453.40B3.1	96.453.40C3.1	96.453.40D3.1
5	96.453.50B3.1	96.453.50C3.1	96.453.50D3.1
6	96.453.60B3.1	96.453.60C3.1	96.453.60D3.1
7	96.453.70B3.1	96.453.70C3.1	96.453.70D3.1
8	96.453.80B3.1	96.453.80C3.1	96.453.80D3.1
1	96.453.10B3.6	96.453.10C3.6	96.453.10D3.6
2	96.453.20B3.6	96.453.20C3.6	96.453.20D3.6
3	96.453.30B3.6	96.453.30C3.6	96.453.30D3.6
4	96.453.40B3.6	96.453.40C3.6	96.453.40D3.6
5	96.453.50B3.6	96.453.50C3.6	96.453.50D3.6
6	96.453.60B3.6	96.453.60C3.6	96.453.60D3.6
7			
8	96.453.80B3.6	96.453.80C3.6	96.453.80D3.6

RST20I5, CABLE ASSEMBLY, 5-POLE

2.5 mm², 20 A



TECHNICAL DATA

Rated current:	20 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, male - free end

Cable color: black
Color of coding: black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: black
Color of coding: turquoise blue
Application: 250 V with PE
Marking of poles: D1, D2, L, PE, N

	H07RN-F halogenated	H07RN-F - Enhanced Version halogen free	H05VV-F halogenated Eca
Length (m)	Art.No.	Art.No.	Art.No.
1	96.453.1034.1	96.453.1054.1	96.453.1004.1
2	96.453.2034.1	96.453.2054.1	96.453.2004.1
3	96.453.3034.1	96.453.3054.1	96.453.3004.1
4	96.453.4034.1	96.453.4054.1	96.453.4004.1
5	96.453.5034.1	96.453.5054.1	96.453.5004.1
6	96.453.6034.1	96.453.6054.1	96.453.6004.1
7	96.453.7034.1	96.453.7054.1	96.453.7004.1
8	96.453.8034.1	96.453.8054.1	96.453.8004.1
1	96.453.1034.6		96.453.1004.6
2	96.453.2034.6		96.453.2004.6
3	96.453.3034.6		96.453.3004.6
4	96.453.4034.6		96.453.4004.6
5	96.453.5034.6		96.453.5004.6
6	96.453.6034.6		96.453.6004.6
7	96.453.7034.6		96.453.7004.6
8	96.453.8034.6		96.453.8004.6

connection cable, male - free end

Cable color: black
Color of coding: black
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: black
Color of coding: turquoise blue
Application: 250 V with PE
Marking of poles: D1, D2, L, PE, N

	H05Z1Z1-F halogen free B2ca s1 d1 a1	H05Z1Z1-F halogen free Cca s1 d1 a1	H05Z1Z1-F halogen free Dca s1 d2 a1
Length (m)	Art.No.	Art.No.	Art.No.
1	96.453.10B4.1	96.453.10C4.1	96.453.10D4.1
2	96.453.20B4.1	96.453.20C4.1	96.453.20D4.1
3	96.453.30B4.1	96.453.30C4.1	96.453.30D4.1
4	96.453.40B4.1	96.453.40C4.1	96.453.40D4.1
5	96.453.50B4.1	96.453.50C4.1	96.453.50D4.1
6	96.453.60B4.1	96.453.60C4.1	96.453.60D4.1
7	96.453.70B4.1	96.453.70C4.1	96.453.70D4.1
8	96.453.80B4.1	96.453.80C4.1	96.453.80D0.1
1	96.453.10B4.6	96.453.10C4.6	96.453.10D4.6
2	96.453.20B4.6	96.453.20C4.6	96.453.20D4.6
3	96.453.30B4.6	96.453.30C4.6	96.453.30D4.6
4	96.453.40B4.6	96.453.40C4.6	96.453.40D4.6
5	96.453.50B4.6	96.453.50C4.6	96.453.50D4.6
6			
7			
8			

RST20I5, CABLE ASSEMBLY, 5-POLE

4 mm², 20 A



TECHNICAL DATA

Rated current:	20 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

connecting cable, female - male

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, N, PE

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	D1, D2, L, PE, N

H07RN-F halogenated

H05VV-F halogenated

Length (m)	Art.No.	Art.No.
	■ black	■ black
1	96.454.1030.1	96.454.1000.1
2	96.454.2030.1	96.454.2000.1
3	96.454.3030.1	96.454.3000.1
4	96.454.4030.1	96.454.4000.1
5	96.454.5030.1	96.454.5000.1
6	96.454.6030.1	96.454.6000.1
7	96.454.7030.1	96.454.7000.1
8	96.454.8030.1	96.454.8000.1
	■ black	■ black
1	96.454.1030.6	96.454.1000.6
2	96.454.2030.6	96.454.2000.6
3	96.454.3030.6	96.454.3000.6
4	96.454.4030.6	96.454.4000.6
5	96.454.5030.6	96.454.5000.6
6	96.454.6030.6	96.454.6000.6
7	96.454.7030.6	96.454.7000.6
8	96.454.8030.6	96.454.8000.6



TECHNICAL DATA

Rated current:	20 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color:	■ black
Color of coding:	■ black
Application:	250/400 V with PE
Marking of poles:	1, 2, 3, N, PE

Cable color:	■ black
Color of coding:	■ black
Application:	250 V with PE
Marking of poles:	D1, D2, L, PE, N

H07RN-F halogenated

H05VV-F halogenated

Length (m)	Art.No.	Art.No.
	■ black	■ black
1	96.454.1033.1	96.454.1003.1
2	96.454.2033.1	96.454.2003.1
3	96.454.3033.1	96.454.3003.1
4	96.454.4033.1	96.454.4003.1
5	96.454.5033.1	96.454.5003.1
6	96.454.6033.1	96.454.6003.1
7	96.454.7033.1	96.454.7003.1
8	96.454.8033.1	96.454.8003.1
	■ black	■ black
1	96.454.1033.6	96.454.1003.6
2	96.454.2033.6	96.454.2003.6
3	96.454.3033.6	96.454.3003.6
4	96.454.4033.6	96.454.4003.6
5	96.454.5033.6	96.454.5003.6
6	96.454.6033.6	96.454.6003.6
7	96.454.7033.6	96.454.7003.6
8	96.454.8033.6	96.454.8003.6

RST20I5, CABLE ASSEMBLY, 5-POLE

4 mm², 20 A



TECHNICAL DATA

Rated current:	20 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, male - free end

Cable color: **black**
Color of coding: **black**
Application: 250/400 V with PE
Marking of poles: 1, 2, 3, N, PE

Cable color: **turquoise blue**
Color of coding: **turquoise blue**
Application: 250 V with PE
Marking of poles: D1, D2, L, PE, N

H07RN-F
halogenated

H05VV-F
halogenated

Length (m)	Art.No.	Art.No.
	black	black
1	96.454.1034.1	96.454.1004.1
2	96.454.2034.1	96.454.2004.1
3	96.454.3034.1	96.454.3004.1
4	96.454.4034.1	96.454.4004.1
5	96.454.5034.1	96.454.5004.1
6	96.454.6034.1	96.454.6004.1
7	96.454.7034.1	96.454.7004.1
8	96.454.8034.1	96.454.8004.1
	black	black
1	96.454.1034.6	96.454.1004.6
2	96.454.2034.6	96.454.2004.6
3	96.454.3034.6	96.454.3004.6
4	96.454.4034.6	96.454.4004.6
5	96.454.5034.6	96.454.5004.6
6	96.454.6034.6	96.454.6004.6
7	96.454.7034.6	96.454.7004.6
8	96.454.8034.6	96.454.8004.6

RST20I6, CONNECTOR, 6-POLE

SCREW CONNECTION

female



TECHNICAL DATA

Rated current:	16 A	Cross section fine-stranded:	0,2 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 1,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

straight, for cables Ø 6-10 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.061.4053.6

female

male



straight, for cables Ø 6-10 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.061.4053.6	96.062.4053.6

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 1,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female

straight, for cables Ø 8-13 mm, with longitudinal sealing

female



Color of coding	Application	Marking of poles	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.061.4853.6

female

male



straight, for cables Ø 8-13 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.061.4853.6	96.062.4853.6

RST20I6, CONNECTOR, 6-POLE

SCREW CONNECTION

female



TECHNICAL DATA			
Rated current:	16 A	Cross section fine-stranded:	0,2 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 1,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

straight, for cables Ø 10-14 mm, with longitudinal sealing

Color of coding	Application	Marking of poles	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.061.4153.6

female

male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.061.4153.6	96.062.4153.6

TECHNICAL DATA			
Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 1,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female

straight, for cables Ø 13-18 mm, with longitudinal sealing

Color of coding	Application	Marking of poles	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.061.4553.6

female

male



straight, for cables Ø 13-18 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.061.4553.6	96.062.4553.6

female

angled 90°, for cables Ø 6-10 mm, with longitudinal sealing

Color of coding	Application	Marking of poles	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.063.4053.6



RST20I6, CONNECTOR, 6-POLE

SCREW CONNECTION

TECHNICAL DATA			
Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 1,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.063.4053.6	96.064.4053.6
------------------	-------------------	--------------------	---------------	---------------

female



angled 90°, for cables Ø 10-14 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
-----------------	-------------	------------------	---------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.063.4153.6
------------------	-------------------	--------------------	---------------

female



male



angled 90°, for cables Ø 10-14 mm

female

male

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.063.4153.6	96.064.4153.6
------------------	-------------------	--------------------	---------------	---------------

female



splitter connector, for cables Ø 6-10 mm

female

Color of coding	Application	Marking of poles	Art.No.
-----------------	-------------	------------------	---------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.061.4253.6*
------------------	-------------------	--------------------	----------------

female



splitter connector, for cables Ø 10-14 mm

female

Color of coding	Application	Marking of poles	Art.No.
-----------------	-------------	------------------	---------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.061.4353.6*
------------------	-------------------	--------------------	----------------

*) Alternative technical data, see facts & data.

RST20I6, CONNECTOR, 6-POLE

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



straight, for cables Ø 6-10 mm, with longitudinal sealing

Color of coding	Application	Marking of poles	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.161.0053.6

female

male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.161.0053.6	96.162.0053.6

female



straight, for cables Ø 8-13 mm, with longitudinal sealing

Color of coding	Application	Marking of poles	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.161.0853.6

female

male



straight, for cables Ø 8-13 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.161.0853.6	96.162.0853.6

female



straight, for cables Ø 10-14 mm, with longitudinal sealing

Color of coding	Application	Marking of poles	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.161.0153.6

female

male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.161.0153.6	96.162.0153.6

RST20I6, CONNECTOR, 6-POLE

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



straight, for cables Ø 13-18 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.161.0553.6

female

male



straight, for cables Ø 13-18 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.161.0553.6	96.162.0553.6

female



angled 90°, for cables Ø 6-10 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.163.0053.6

female

male



angled 90°, for cables Ø 6-10 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.163.0053.6	96.164.0053.6

female



angled 90°, for cables Ø 10-14 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.163.0153.6

female

male



angled 90°, for cables Ø 10-14 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.163.0153.6	96.164.0153.6

RST20I6, DEVICE CONNECTOR, M16, 6-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female

male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.061.6153.6	9L.062.6153.6
------------------	-------------------	--------------------	---------------	---------------

female

male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.061.6153.6	96.062.6153.6
------------------	-------------------	--------------------	---------------	---------------

female

male



modular, angled 7°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.065.6153.6	96.066.6153.6
------------------	-------------------	--------------------	---------------	---------------

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female

male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.161.2153.6	9L.162.2153.6
------------------	-------------------	--------------------	---------------	---------------

female

male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.161.2153.6	96.162.2153.6
------------------	-------------------	--------------------	---------------	---------------

RST20I6, DEVICE CONNECTOR, M16, 6-POLE

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm² - 2,5 mm²
Terminations per pole:	1	Additional technical data, see facts & data.	

female

male



modular, angled 7°			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.165.2153.6	96.166.2153.6

RST20I6, DEVICE CONNECTOR, M20, 6-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.061.6053.6	9L.062.6053.6
------------------	-------------------	--------------------	---------------	---------------

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.061.6053.6	96.062.6053.6
------------------	-------------------	--------------------	---------------	---------------

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.063.6053.6	96.064.6053.6
------------------	-------------------	--------------------	---------------	---------------

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.161.2053.6	9L.162.2053.6
------------------	-------------------	--------------------	---------------	---------------

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.161.2053.6	96.162.2053.6
------------------	-------------------	--------------------	---------------	---------------

RST20I6, DEVICE CONNECTOR, M20, 6-POLE

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female

male



modular, angled 90°			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.163.2053.6	96.164.2053.6

RST20I6, DEVICE CONNECTOR, M25, 6-POLE

SCREW CONNECTION

TECHNICAL DATA			
Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female

male



modular, straight, with longitudinal sealing			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.061.6253.6	9L.062.6253.6

female

male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.061.6253.6	96.062.6253.6

female

male



modular, angled 90°			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.063.6253.6	96.064.6253.6

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female

male



modular, straight, with longitudinal sealing			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.161.2253.6	9L.162.2253.6

female

male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.161.2253.6	96.162.2253.6

RST20I6, DEVICE CONNECTOR, M25, 6-POLE

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female

male



modular, angled 90°			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.163.2253.6	96.164.2253.6

RST20I6, DEVICE CONNECTOR, M32, 6-POLE

SCREW CONNECTION

TECHNICAL DATA			
Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight, with longitudinal sealing			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.061.6353.6	9L.062.6353.6

female



male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.061.6353.6	96.062.6353.6

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight, with longitudinal sealing			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	9L.161.2353.6	9L.162.2353.6

female



male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, Ls	96.161.2353.6	96.162.2353.6

RST20I7, CONNECTOR, 7-POLE

SCREW CONNECTION

female



TECHNICAL DATA

Rated current:	16 A	Cross section fine-stranded:	0,2 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 1,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

straight, for cables Ø 6-10 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.4053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.4053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.071.4053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.071.4053.6

female



male



straight, for cables Ø 6-10 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4053.1	96.072.4053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4053.0	96.072.4053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.071.4053.9	96.072.4053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.071.4053.6	96.072.4053.6

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 1,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



straight, for cables Ø 8-13 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.4853.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.4853.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.071.4853.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.071.4853.6

female



male



straight, for cables Ø 8-13 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4853.1	96.072.4853.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4853.0	96.072.4853.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.071.4853.9	96.072.4853.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.071.4853.6	96.072.4853.6

RST2017, CONNECTOR, 7-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	16 A	Cross section fine-stranded:	0,2 mm ² - 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:	
Terminations per pole:	1	Connection cross section solid:	0,2 mm ² - 1,5 mm ²
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

female

male



straight, for cables Ø 10-14 mm, with longitudinal sealing

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.4153.1	9L.072.4153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.4153.0	
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.071.4153.9	
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.071.4153.6	

female

male



straight, for cables Ø 10-14 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4153.1	96.072.4153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4153.0	96.072.4153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.071.4153.9	96.072.4153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.071.4153.6	96.072.4153.6

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:	
Terminations per pole:	1	Connection cross section solid:	0,2 mm ² - 1,5 mm ²
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

female

straight, for cables Ø 13-18 mm, with longitudinal sealing

female



Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.4553.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.4553.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.071.4553.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.071.4553.6

female

male



straight, for cables Ø 13-18 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4553.1	96.072.4553.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4553.0	96.072.4553.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.071.4553.9	96.072.4553.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.071.4553.6	96.072.4553.6

female

angled 90°, for cables Ø 6-10 mm, with longitudinal sealing

female



Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.073.4053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.073.4053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.073.4053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.073.4053.6

RST20I7, CONNECTOR, 7-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 1,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.073.4053.1	96.074.4053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.073.4053.0	96.074.4053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.073.4053.9	96.074.4053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.073.4053.6	96.074.4053.6

female



angled 90°, for cables Ø 10-14 mm, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.073.4153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.073.4153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.073.4153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.073.4153.6

female

female



male



angled 90°, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.073.4153.1	96.074.4153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.073.4153.0	96.074.4153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.073.4153.9	96.074.4153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.073.4153.6	96.074.4153.6

female



male



splitter connector, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4253.1*	96.072.4253.1*
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4253.0*	
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.071.4253.9*	
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.071.4253.6*	96.072.4253.6*

female



splitter connector, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4353.1*
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.4353.0*
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.071.4353.9*
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.071.4353.6*

*) Alternative technical data, see facts & data.

RST20I7, CONNECTOR, 7-POLE

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



straight, for cables Ø 6-10 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.0053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.0053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.171.0053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.171.0053.6

female

male



straight, for cables Ø 6-10 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.0053.1	96.172.0053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.0053.0	96.172.0053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.171.0053.9	96.172.0053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.171.0053.6	96.172.0053.6

female



straight, for cables Ø 8-13 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.0853.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.0853.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.171.0853.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.171.0853.6

female

male



straight, for cables Ø 8-13 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.0853.1	96.172.0853.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.0853.0	96.172.0853.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.171.0853.9	96.172.0853.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.171.0853.6	96.172.0853.6

female



straight, for cables Ø 10-14 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.0153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.0153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.171.0153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.171.0153.6

female

male



straight, for cables Ø 10-14 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.0153.1	96.172.0153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.0153.0	96.172.0153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.171.0153.9	96.172.0153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.171.0153.6	96.172.0153.6

RST20I7, CONNECTOR, 7-POLE

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



straight, for cables Ø 13-18 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.0553.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.0553.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.171.0553.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.171.0553.6

female



male



straight, for cables Ø 13-18 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.0553.1	96.172.0553.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.0553.0	96.172.0553.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.171.0553.9	96.172.0553.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.171.0553.6	96.172.0553.6

female



angled 90°, for cables Ø 6-10 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.173.0053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.173.0053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.173.0053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.173.0053.6

female



male



angled 90°, for cables Ø 6-10 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.173.0053.1	96.174.0053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.173.0053.0	96.174.0053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.173.0053.9	96.174.0053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.173.0053.6	96.174.0053.6

female



angled 90°, for cables Ø 10-14 mm, with longitudinal sealing

female

Color of coding	Application	Marking of poles	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.173.0153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.173.0153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.173.0153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.173.0153.6

female



male



angled 90°, for cables Ø 10-14 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.173.0153.1	96.174.0153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.173.0153.0	96.174.0153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.173.0153.9	96.174.0153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.173.0153.6	96.174.0153.6

RST20I7, DEVICE CONNECTOR, M16, 7-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.6153.1	9L.072.6153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.6153.0	9L.072.6153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.071.6153.9	9L.072.6153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.071.6153.6	9L.072.6153.6

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.6153.1	96.072.6153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.6153.0	96.072.6153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.071.6153.9	96.072.6153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.071.6153.6	96.072.6153.6

female



male



modular, angled 7°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.075.6153.1	96.076.6153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.075.6153.0	96.076.6153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.075.6153.9	96.076.6153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.075.6153.6	96.076.6153.6

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.2153.1	9L.172.2153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.2153.0	9L.172.2153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.171.2153.9	9L.172.2153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.171.2153.6	9L.172.2153.6

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.2153.1	96.172.2153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.2153.0	96.172.2153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.171.2153.9	96.172.2153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.171.2153.6	96.172.2153.6

RST20I7, DEVICE CONNECTOR, M16, 7-POLE

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, angled 7°			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.175.2153.1	96.176.2153.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.175.2153.0	96.176.2153.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.175.2153.9	96.176.2153.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.175.2153.6	96.176.2153.6

RST20I7, DEVICE CONNECTOR, M20, 7-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.6053.1	9L.072.6053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.6053.0	9L.072.6053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.071.6053.9	9L.072.6053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.071.6053.6	9L.072.6053.6

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.6053.1	96.072.6053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.6053.0	96.072.6053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.071.6053.9	96.072.6053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.071.6053.6	96.072.6053.6

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.073.6053.1	96.074.6053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.073.6053.0	96.074.6053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.073.6053.9	96.074.6053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.073.6053.6	96.074.6053.6

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.2053.1	9L.172.2053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.2053.0	9L.172.2053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.171.2053.9	9L.172.2053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.171.2053.6	9L.172.2053.6

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.2053.1	96.172.2053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.2053.0	96.172.2053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.171.2053.9	96.172.2053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.171.2053.6	96.172.2053.6

RST20I7, DEVICE CONNECTOR, M20, 7-POLE

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm² - 2,5 mm²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, angled 90°			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.173.2053.1	96.174.2053.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.173.2053.0	96.174.2053.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.173.2053.9	96.174.2053.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.173.2053.6	96.174.2053.6

RST2017, DEVICE CONNECTOR, M25, 7-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.6253.1	9L.072.6253.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.6253.0	9L.072.6253.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.071.6253.9	9L.072.6253.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.071.6253.6	9L.072.6253.6

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.6253.1	96.072.6253.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.6253.0	96.072.6253.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.071.6253.9	96.072.6253.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.071.6253.6	96.072.6253.6

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.073.6253.1	96.074.6253.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.073.6253.0	96.074.6253.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.073.6253.9	96.074.6253.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.073.6253.6	96.074.6253.6

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.2253.1	9L.172.2253.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.2253.0	9L.172.2253.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.171.2253.9	9L.172.2253.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.171.2253.6	9L.172.2253.6

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.2253.1	96.172.2253.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.2253.0	96.172.2253.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.171.2253.9	96.172.2253.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.171.2253.6	96.172.2253.6

RST20I7, DEVICE CONNECTOR, M25, 7-POLE

CRIMP

TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm² - 2,5 mm²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, angled 90°			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.173.2253.1	96.174.2253.1
□ light grey	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.173.2253.0	96.174.2253.0
■ light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.173.2253.9	96.174.2253.9
■ turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.173.2253.6	96.174.2253.6

RST20I7, DEVICE CONNECTOR, M32, 7-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	0,2 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,2 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.071.6353.1	9L.072.6353.1
light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.071.6353.9	9L.072.6353.9
turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.071.6353.6	9L.072.6353.6

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.071.6353.1	96.072.6353.1
light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.071.6353.9	96.072.6353.9
turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.071.6353.6	96.072.6353.6

CRIMP

TECHNICAL DATA

Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Cross section fine-stranded:	0,75 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	

female



male



modular, straight, with longitudinal sealing

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	9L.171.2353.1	9L.172.2353.1
light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	9L.171.2353.9	9L.172.2353.9
turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	9L.171.2353.6	9L.172.2353.6

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
black	250/400 V with PE	1, 2, 3, 4/N, 5, 6, PE	96.171.2353.1	96.172.2353.1
light blue	250/400 V	1, 2, 3, 4/N, 5, 6, 7	96.171.2353.9	96.172.2353.9
turquoise blue	250/400 V with PE	L, N, PE, 1, 2, 3, 4	96.171.2353.6	96.172.2353.6

RST25I3, CONNECTOR, 3-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	25 A	Cross section fine-stranded:	0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 6 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female

male



straight, for cables Ø 6-10 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250 V with PE	L, N, PE	96.031.4054.3	96.032.4054.3

female

male



straight, for cables Ø 10-14 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250 V with PE	L, N, PE	96.031.4154.3	96.032.4154.3

female

male



straight, for cables Ø 13-18 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250 V with PE	L, N, PE	96.031.4554.3	96.032.4554.3

female

male



angled 90°, for cables Ø 6-10 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250 V with PE	L, N, PE	96.033.4054.3	96.034.4054.3

female

male



angled 90°, for cables Ø 10-14 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250 V with PE	L, N, PE	96.033.4154.3	96.034.4154.3

female

splitter connector, for cables Ø 6-10 mm

female



Color of coding	Application	Marking of poles	Art.No.
■ concrete grey	250 V with PE	L, N, PE	96.031.4254.3*

*) Alternative technical data, see facts & data.

RST25I3, DEVICE CONNECTOR, M16, 3-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	25 A	Cross section fine-stranded:
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:
Terminations per pole:	1	Additional technical data, see facts & data.
Lockable:	self-locking (unlocking by tool)	

female

male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250 V with PE	L, N, PE	96.031.6154.3	96.032.6154.3

RST25I3, DEVICE CONNECTOR, M20, 3-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	25 A	Cross section fine-stranded: 0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid: 0,75 mm ² - 6 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.
Lockable:	self-locking (unlocking by tool)	

female

male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250 V with PE	L, N, PE	96.031.6054.3	96.032.6054.3

female

male



modular, angled 90°			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250 V with PE	L, N, PE	96.033.6054.3	96.034.6054.3

RST25I3, DEVICE CONNECTOR, M25, 3-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	25 A	Cross section fine-stranded: 0,75 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid: 0,75 mm ² - 6 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.
Lockable:	self-locking (unlocking by tool)	

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ concrete grey	250 V with PE	L, N, PE	96.031.5054.3	96.032.5054.3

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ concrete grey	250 V with PE	L, N, PE	96.033.6254.3	96.034.6254.3

RST25I3, CABLE ASSEMBLY, 3-POLE

4 mm², 25 A



TECHNICAL DATA

Rated current:	25 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

connecting cable, female - male

Cable color:	
Color of coding:	■ concrete grey
Application:	250 V with PE
Marking of poles:	L, N, PE

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	96.834.1030.3	96.834.1000.3
2	96.834.2030.3	96.834.2000.3
3	96.834.3030.3	96.834.3000.3
4	96.834.4030.3	96.834.4000.3



TECHNICAL DATA

Rated current:	25 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color:	
Color of coding:	■ concrete grey
Application:	250 V with PE
Marking of poles:	L, N, PE

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	96.834.1033.3	96.834.1003.3
2	96.834.2033.3	96.834.2003.3
3	96.834.3033.3	96.834.3003.3
4	96.834.4033.3	96.834.4003.3

RST25I3, CABLE ASSEMBLY, 3-POLE

4 mm², 25 A



TECHNICAL DATA

Rated current:	25 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, male - free end

Cable color:	
Color of coding:	■ concrete grey
Application:	250 V with PE
Marking of poles:	L, N, PE

Length (m)	H07RN-F halogenated	H05VV-F halogenated Eca
	Art.No.	Art.No.
	■ black	■ black
1	96.834.1034.3	96.834.1004.3
2	96.834.2034.3	96.834.2004.3
3	96.834.3034.3	96.834.3004.3
4	96.834.4034.3	96.834.4004.3

RST25I5, CONNECTOR, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	25 A	Cross section fine-stranded: 0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 0,75 mm ² - 4 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
Additional technical data, see facts & data.		

female

male



straight, for cables Ø 6-10 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	96.051.4054.3	96.052.4054.3

female

male



straight, for cables Ø 10-14 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	96.051.4154.3	96.052.4154.3

female

male



straight, for cables Ø 13-18 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	96.051.4554.3	96.052.4554.3

TECHNICAL DATA		
Rated current:	25 A	Cross section fine-stranded: 1,5 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 1,5 mm ² - 4 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
Additional technical data, see facts & data.		

female

male



straight, for cables Ø 13-18 mm

female

male

Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	99.575.0000.7	99.576.0000.7

*) Alternative technical data, see facts & data.

RST25I5, CONNECTOR, 5-POLE

SCREW CONNECTION

TECHNICAL DATA			
Rated current:	25 A	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



splitter connector, for cables Ø 6-10 mm			female
Color of coding	Application	Marking of poles	Art.No.
■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	99.584.0000.7*

female



splitter connector, for cables Ø 10-14 mm			female
Color of coding	Application	Marking of poles	Art.No.
■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	99.585.0000.7*

*) Alternative technical data, see facts & data.

RST25I5, DEVICE CONNECTOR, M16, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	25 A	Cross section fine-stran-
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	-------------------	-----------------

■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	96.051.6154.3	96.052.6154.3
-----------------	-------------------	----------------	---------------	---------------

RST25I5, DEVICE CONNECTOR, M20, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	25 A	Cross section fine-stranded: 0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid: 0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.
Lockable:	self-locking (unlocking by tool)	

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	96.051.6054.3	96.052.6054.3
-----------------	-------------------	----------------	---------------	---------------

female



male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
-----------------	-------------	------------------	----------------	--------------

■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	96.053.6054.3	96.054.6054.3
-----------------	-------------------	----------------	---------------	---------------

RST25I5, DEVICE CONNECTOR, M25, 5-POLE

SCREW CONNECTION

female



male



TECHNICAL DATA			
Rated current:	25 A	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	96.051.5054.3	96.052.5054.3

female



male



TECHNICAL DATA			
Rated current:	25 A	Cross section fine-stranded:	1,5 mm ² - 6 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	1,5 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	99.577.0000.7	99.578.0000.7

female



male



TECHNICAL DATA			
Rated current:	25 A	Cross section fine-stranded:	0,75 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	0,75 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ concrete grey	250/400 V with PE	L, N, PE, 1, 2	96.053.6254.3	96.054.6254.3

RST25I5, CABLE ASSEMBLY, 5-POLE

4 mm², 25 A



TECHNICAL DATA

Rated current:	25 A	type of construction:	Cable screw gland
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

connecting cable, female - male

Cable color:	
Color of coding:	■ concrete grey
Application:	250/400 V with PE
Marking of poles:	L, N, PE, 1, 2

H07RN-F halogenated	H05VV-F halogenated
-------------------------------	-------------------------------

Length (m)	Art.No.	Art.No.
	■ black	■ black
1	96.854.1030.3	96.854.1000.3
2	96.854.2030.3	96.854.2000.3
3	96.854.3030.3	96.854.3000.3
4	96.854.4030.3	96.854.4000.3



TECHNICAL DATA

Rated current:	25 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, female - free end

Cable color:	
Color of coding:	■ concrete grey
Application:	250/400 V with PE
Marking of poles:	L, N, PE, 1, 2

H07RN-F halogenated	H05VV-F halogenated
-------------------------------	-------------------------------

Length (m)	Art.No.	Art.No.
	■ black	■ black
1	96.854.1033.3	96.854.1003.3
2	96.854.2033.3	96.854.2003.3
3	96.854.3033.3	96.854.3003.3
4	96.854.4033.3	96.854.4003.3

RST25I5, CABLE ASSEMBLY, 5-POLE

4 mm², 25 A



TECHNICAL DATA

Rated current:	25 A	Preparation of conductor ends:	ultrasonically compressed wire ends
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	type of construction:	Cable screw gland
Lockable:	self-locking (unlocking by tool)	Additional technical data, see facts & data.	

connection cable, male - free end

H07RN-F halogenated	H05VV-F halogenated
-------------------------------	-------------------------------

Cable color:
Color of coding: ■ concrete grey
Application: 250/400 V with PE
Marking of poles: L, N, PE, 1, 2

Length (m)	Art.No.	Art.No.
	■ black	■ black
1	96.854.1034.3	96.854.1004.3
2	96.854.2034.3	96.854.2004.3
3	96.854.3034.3	96.854.3004.3
4	96.854.4034.3	96.854.4004.3

RST20/25, ACCESSORIES



cover piece for 2-/3-pole, captive against loss, for female

Color	Art.No.
■ black	99.414.6205.2
□ light grey	99.413.6205.2



cover piece for 2-/3-pole, captive against loss, for male

Color	Art.No.
■ black	99.416.6205.2
□ light grey	99.415.6205.2



cover piece for 2-/3-pole, not captive against loss, for female

Color	Art.No.
■ black	Z5.564.4553.1
□ light grey	Z5.564.4553.0



cover piece for 2-/3-pole, not captive against loss, for male

Color	Art.No.
■ black	05.564.4453.1
□ light grey	05.564.4453.0



cover piece for 4-/5-pole, captive against loss, for female

Color	Art.No.
■ black	99.530.0000.7
□ light grey	99.529.0000.7



cover piece for 4-/5-pole, captive against loss, for male

Color	Art.No.
■ black	99.532.0000.7
□ light grey	99.531.0000.7



cover piece for 4-/5-pole, not captive against loss, for female

Color	Art.No.
■ black	Z5.565.9853.1
□ light grey	Z5.565.9853.0

RST20/25, ACCESSORIES



cover piece for 4-/5-pole, not captive against loss, for male

Color	Art.No.
■ black	05.565.9953.1
□ light grey	05.565.9953.0



cover piece for 6-/7-pole, captive against loss, for female

Color	Art.No.
■ black	99.589.0000.7



cover piece for 6-/7-pole, captive against loss, for male

Color	Art.No.
■ black	99.591.0000.7



cover piece for 6-/7-pole, not captive against loss, for female

Color	Art.No.
■ black	25.569.5253.1



cover piece for 6-/7-pole, not captive against loss, for male

Color	Art.No.
■ black	25.569.5353.1



cover piece for pole socket, not captive against loss, for female

Color	Art.No.
■ black	25.564.4500.1



fastening cord for cover piece

Art.No.
99.000.9950.6

RST20/25, ACCESSORIES



manual disconnect tool, for 2- up to 5-pole

Color	Art.No.
■ black	05.564.8653.1
■ leaves green	05.564.8653.7
■ concrete grey	05.564.8653.3



manual disconnect tool, for 6-/7-pole

Color	Art.No.
■ concrete grey	06.562.8753.0



manual disconnect tool, for shrinkage tube version

Color	Art.No.
■ black	05.565.8653.1
■ leaves green	05.565.8653.7
■ concrete grey	05.565.8653.3



locking slide - safety Clip

Color	Art.No.
■ black	05.583.2900.1
■ concrete grey	05.583.2900.3



Spare sealing, Ø 6 - 10 mm

Color	Art.No.
■ black	05.565.0400.0



Spare sealing, Ø 10 - 14 mm

Color	Art.No.
■ black	05.565.0500.0



Spare sealing, Ø 13 - 18 mm

Color	Art.No.
■ black	05.565.2600.0

RST20/25, ACCESSORIES



mounting panel, for splitter connectors

Color	Art.No.
■ black	01.006.1553.1
□ light grey	01.006.1553.0



crimp contacts for 2-/3-pole, female

Nominal cross section	Art.No.
1 mm ²	02.122.9000.0
1.5 mm ²	02.122.9100.0
2.5 mm ²	02.122.9200.0
4 mm ²	02.122.9300.0



crimp contacts for 2-/3-pole, male

Nominal cross section	Art.No.
1 mm ²	05.544.7800.0
1.5 mm ²	05.544.7900.0
2.5 mm ²	05.544.8000.0
4 mm ²	05.545.4600.0



crimp contacts for 4-/5-pole, female

Nominal cross section	Art.No.
1 mm ²	02.125.5521.8
1.5 mm ²	02.125.5621.8
2.5 mm ²	02.125.5721.8
4 mm ²	02.125.5821.8



crimp contacts for 4-/5-pole, male

Nominal cross section	Art.No.
1 mm ²	05.545.0021.8
1.5 mm ²	05.545.0121.8
2.5 mm ²	05.545.0221.8
4 mm ²	05.545.0321.8



crimp contacts for 6-/7-pole, female

Nominal cross section	Art.No.
1 mm ²	02.127.1121.8
1.5 mm ²	02.127.1221.8
2.5 mm ²	02.127.1321.8



crimp contacts for 6-/7-pole, male

Nominal cross section	Art.No.
1 mm ²	05.546.3921.8
1.5 mm ²	05.546.4021.8
2.5 mm ²	05.546.4121.8

RST20/25, ACCESSORIES



Crimping tool, System kit

Art.No.
95.101.0800.0



crimping die B

Art.No.
05.502.2100.0



contact positioner for crimping tool

Color	Art.No.
■ black	05.502.3600.0



unlocking tool, for crimp contacts

Art.No.
05.502.3500.0



ferrule crimping tool, for cable end sleeve

Art.No.
95.101.1300.0



cable end sleeve, for RST20i3 spring clamp connection

Color	Nominal cross section	Art.No.
■ black	1.5 mm ²	06.600.3927.0
■ Red	1 mm ²	06.600.3627.0
■ Grey	0.75 mm ²	06.600.3727.0
□ white	0.5 mm ²	06.600.3827.0



screwdriver, for spring clamp connection

Art.No.
06.502.4300.0

RST20/25, ACCESSORIES



screwdriver

Art.No.
05.502.4000.0



mounting frame, for device connector M25

Color	Art.No.
☐ white	99.400.9999.7



surface mount socket

Color	Art.No.
☐ white	99.404.9999.7



spacer ring for device connector M25, manually actuated

Color	Art.No.
☒ black	05.568.8853.1



spacer ring for device connector M25, screwdriver actuated

Color	Art.No.
☒ black	05.566.5253.1
☐ light grey	05.566.5253.0



jumper plug, for series connection

Color	Application	Marking of poles	Art.No.
☒ signal brown	~50/-120 V	1, 2	99.537.0000.7



sample case, RST20i2...i7

Art.No.
99.431.0000.0

RST20/25, ACCESSORIES



sample case, RST20i3

Art.No.

99.429.0000.0



sample case, RST20i5

Art.No.

99.430.0000.0



sample case, RST20i7

Art.No.

99.439.0000.1

sample set, ATEX RST20i3

Art.No.

99.663.0000.0




sample set, ATEX RST20i5

Art.No.

99.664.0000.0

RST® CLASSIC ATEX

The connectors for use in hazardous environments.

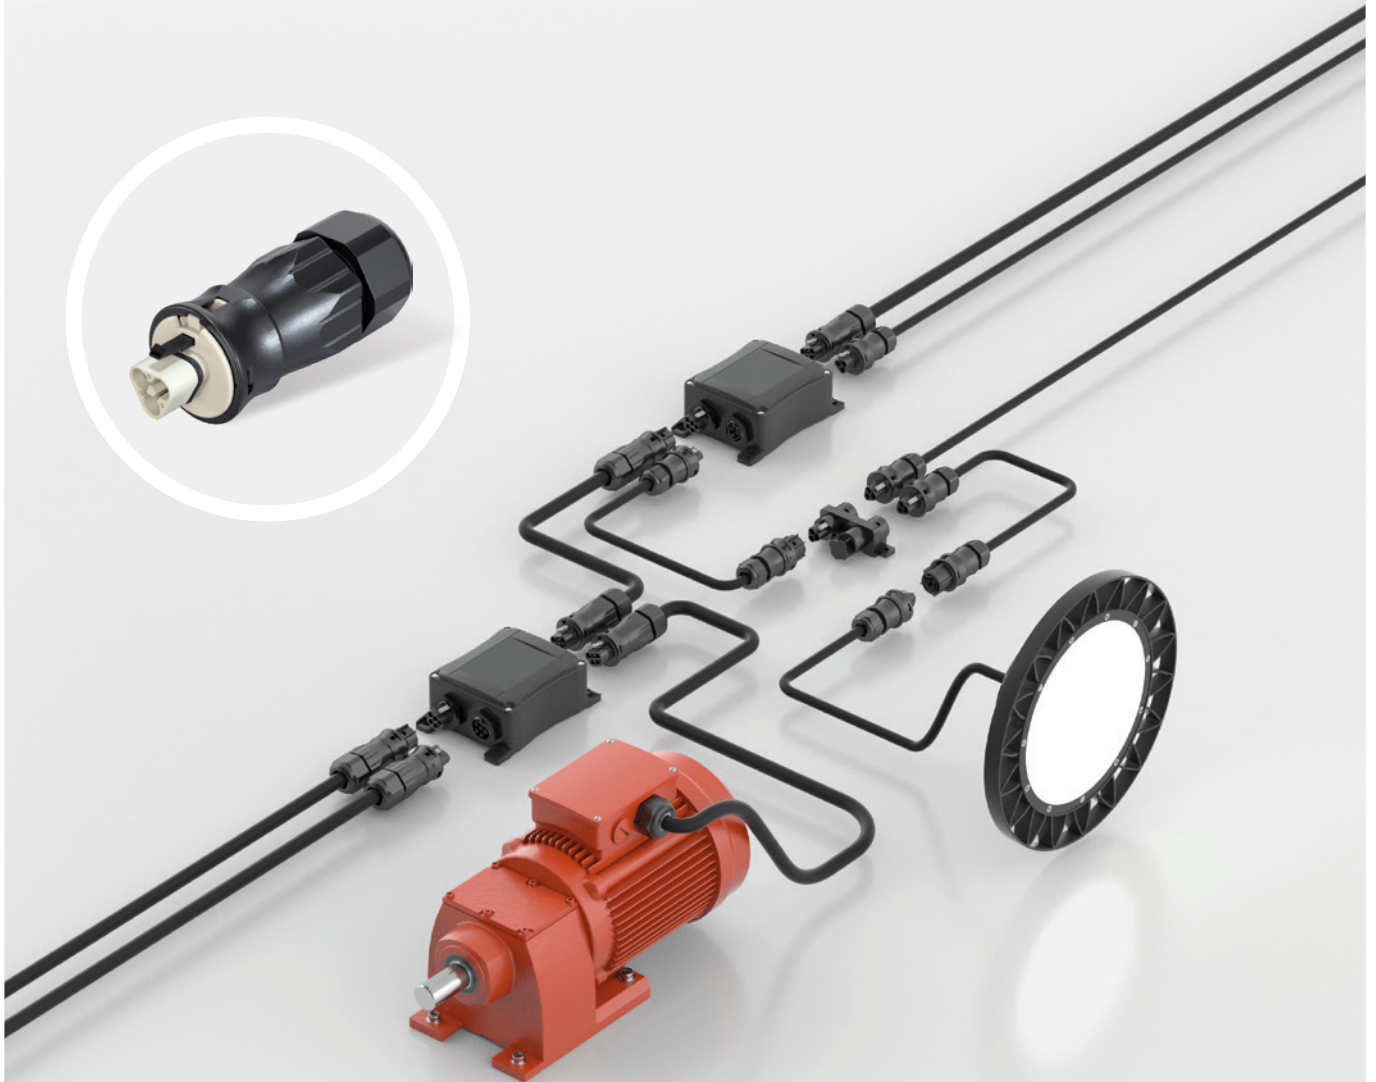

FEATURES

- + 2-pole to 5-pole
- + ATEX for Zone 2/22
- + Classification
 - Ex II 3G Ex ec IIC T6 Gc
 - Ex II 3D Ex tc IIIC T85 °C Dc

RST20i2



Mechanical coding (view on connector interface female)	black	light gray	leaf green	pebble gray	signal brown
Operating voltage (application)	250 V	250 V	~50/-120 V	~50/-120 V	~50/-120 V
Marking of poles	L, N	L, N	+, -	1, 2	1, 2

RST20i3



Mechanical coding (view on connector interface female)	black	light gray	light blue	signal brown
Operating voltage (application)	250 V with PE	250 V with PE	250/400 V	~50/-120 V with PE
Marking of poles	L, N, PE	L, N, PE	1, 2, 3	1, 2, PE

RST20i4



Mechanical coding (view on connector interface female)	black	light gray	signal brown
Operating voltage (application)	250/400 V with PE	250/400 V with PE	~50/-120 V
Marking of poles	1, 2, 3, PE	1, 2, 3, PE	1, 2, 3, 4

RST20i5



Mechanical coding (view on connector interface female)	black	light gray	turquoise	light blue	signal brown
Operating voltage (application)	250/400 V with PE	250/400 V with PE	250 V with PE	250/400 V	~50/-120 V
Marking of poles	1, 2, 3, N, PE	1, 2, 3, N, PE	D1, D2, L, PE, N	1, 2, 3, 4, 5	1, 2, 3, 4, 5

RST20I2 ATEX, CONNECTOR, 2-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	1,5 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	1,5 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	X6.021.4053.1	X6.022.4053.1
□ light grey	250 V	L, N	X6.021.4053.0	X6.022.4053.0
■ pebble grey	~50/-120 V	+, -	X6.021.4050.8	X6.022.4050.8
■ signal brown	~50/-120 V	1, 2	X6.021.4051.4	X6.022.4051.4

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	X6.021.4153.1	X6.022.4153.1
□ light grey	250 V	L, N	X6.021.4153.0	X6.022.4153.0
■ pebble grey	~50/-120 V	+, -	X6.021.4150.8	X6.022.4150.8
■ signal brown	~50/-120 V	1, 2	X6.021.4151.4	X6.022.4151.4

female



splitter connector, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.
■ black	250 V	L, N	X6.021.4253.1
□ light grey	250 V	L, N	X6.021.4253.0
■ pebble grey	~50/-120 V	+, -	X6.021.4250.8
■ signal brown	~50/-120 V	1, 2	X6.021.4251.4

female



splitter connector, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.
■ black	250 V	L, N	X6.021.4353.1
□ light grey	250 V	L, N	X6.021.4353.0
■ pebble grey	~50/-120 V	+, -	X6.021.4350.8
■ signal brown	~50/-120 V	1, 2	X6.021.4351.4

RST20I2 ATEX, CONNECTOR, 2-POLE

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 1,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	X6.021.0053.1*	X6.022.0053.1*
□ light grey	250 V	L, N	X6.021.0053.0*	X6.022.0053.0*
■ pebble grey	~50/-120 V	+, -	X6.021.0050.8*	X6.022.0050.8*
■ signal brown	~50/-120 V	1, 2	X6.021.0051.4*	X6.022.0051.4*

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	X6.021.0153.1*	X6.022.0153.1*
□ light grey	250 V	L, N	X6.021.0153.0*	X6.022.0153.0*
■ pebble grey	~50/-120 V	+, -	X6.021.0150.8*	X6.022.0150.8*
■ signal brown	~50/-120 V	1, 2	X6.021.0151.4*	X6.022.0151.4*

*) Alternative technical data, see facts & data.

RST20I2 ATEX, DEVICE CONNECTOR, M20, 2-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 1,5 mm ² - 4 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	X6.021.6053.1	X6.022.6053.1
□ light grey	250 V	L, N	X6.021.6053.0	X6.022.6053.0
■ signal brown	~50/-120 V	1, 2	X6.021.6051.4	X6.022.6051.4

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 1,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	X6.021.2053.1*	X6.022.2053.1*
□ light grey	250 V	L, N	X6.021.2053.0*	X6.022.2053.0*
■ signal brown	~50/-120 V	1, 2	X6.021.2051.4*	X6.022.2051.4*

*) Alternative technical data, see facts & data.

RST20I2 ATEX, DEVICE CONNECTOR, M25, 2-POLE

SCREW CONNECTION

female



male



TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 1,5 mm ² - 4 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
Additional technical data, see facts & data.		

standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	X6.021.5053.1	X6.022.5053.1
□ light grey	250 V	L, N	X6.021.5053.0	X6.022.5053.0
■ signal brown	~50/-120 V	1, 2	X6.021.5051.4	X6.022.5051.4

SPRING CLAMP CONNECTION

female



male



TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 1,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
Additional technical data, see facts & data.		

standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V	L, N	X6.021.1053.1*	X6.022.1053.1*
□ light grey	250 V	L, N	X6.021.1053.0*	X6.022.1053.0*
■ signal brown	~50/-120 V	1, 2	X6.021.1051.4*	X6.022.1051.4*

*) Alternative technical data, see facts & data.

RST2013 ATEX, CONNECTOR, 3-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	1,5 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	1,5 mm ² - 4 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	X6.031.4053.1	X6.032.4053.1
□ light grey	250 V with PE	L, N, PE	X6.031.4053.0	X6.032.4053.0
■ leaves green	250/400 V with PE	1, 2, PE	X6.031.4055.7	X6.032.4055.7
■ light blue	250/400 V	1, 2, 3	X6.031.4053.9	X6.032.4053.9
■ signal brown	~50/-120 V with PE	1, 2, PE	X6.031.4051.4	X6.032.4051.4

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	X6.031.4153.1	X6.032.4153.1
□ light grey	250 V with PE	L, N, PE	X6.031.4153.0	X6.032.4153.0
■ leaves green	250/400 V with PE	1, 2, PE	X6.031.4155.7	X6.032.4155.7
■ light blue	250/400 V	1, 2, 3	X6.031.4153.9	X6.032.4153.9
■ signal brown	~50/-120 V with PE	1, 2, PE	X6.031.4151.4	X6.032.4151.4

female



male



straight, for cables Ø 13-18 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	X6.031.4553.1	X6.032.4553.1

female



angled 90°, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.
■ black	250 V with PE	L, N, PE	X6.033.4053.1

female



splitter connector, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.
■ black	250 V with PE	L, N, PE	X6.031.4253.1
□ light grey	250 V with PE	L, N, PE	X6.031.4253.0
■ leaves green	250/400 V with PE	1, 2, PE	X6.031.4255.7
■ light blue	250/400 V	1, 2, 3	X6.031.4253.9
■ signal brown	~50/-120 V with PE	1, 2, PE	X6.031.4251.4

female



splitter connector, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.
■ black	250 V with PE	L, N, PE	X6.031.4353.1
□ light grey	250 V with PE	L, N, PE	X6.031.4353.0
■ leaves green	250/400 V with PE	1, 2, PE	X6.031.4355.7
■ light blue	250/400 V	1, 2, 3	X6.031.4353.9
■ signal brown	~50/-120 V with PE	1, 2, PE	X6.031.4351.4

RST20I3 ATEX, CONNECTOR, 3-POLE

SPRING CLAMP CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	1,5 mm ² - 2,5 mm ²
Terminations per pole:	2	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	X6.031.0053.1*	X6.032.0053.1*
□ light grey	250 V with PE	L, N, PE	X6.031.0053.0*	X6.032.0053.0*
■ leaves green	250/400 V with PE	1, 2, PE	X6.031.0055.7*	X6.032.0055.7*
■ light blue	250/400 V	1, 2, 3	X6.031.0053.9*	X6.032.0053.9*
■ signal brown	~50/-120 V with PE	1, 2, PE	X6.031.0051.4*	X6.032.0051.4*

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	X6.031.0153.1*	X6.032.0153.1*
□ light grey	250 V with PE	L, N, PE	X6.031.0153.0*	X6.032.0153.0*
■ leaves green	250/400 V with PE	1, 2, PE	X6.031.0155.7*	X6.032.0155.7*
■ light blue	250/400 V	1, 2, 3	X6.031.0153.9*	X6.032.0153.9*
■ signal brown	~50/-120 V with PE	1, 2, PE	X6.031.0151.4*	X6.032.0151.4*

*) Alternative technical data, see facts & data.

RST20I3 ATEX, DEVICE CONNECTOR, M20, 3-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 1,5 mm ² - 4 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
Additional technical data, see facts & data.		

female



male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250 V with PE	L, N, PE	X6.031.6053.1	X6.032.6053.1
□ light grey	250 V with PE	L, N, PE	X6.031.6053.0	X6.032.6053.0
■ leaves green	250/400 V with PE	1, 2, PE	X6.031.6055.7	X6.032.6055.7
■ signal brown	~50/-120 V with PE	1, 2, PE	X6.031.6051.4	X6.032.6051.4

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 1,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
Additional technical data, see facts & data.		

female



male



modular, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250 V with PE	L, N, PE	X6.031.2053.1*	X6.032.2053.1*
□ light grey	250 V with PE	L, N, PE	X6.031.2053.0*	X6.032.2053.0*
■ leaves green	250/400 V with PE	1, 2, PE	X6.031.2055.7*	X6.032.2055.7*
■ signal brown	~50/-120 V with PE	1, 2, PE	X6.031.2051.4*	X6.032.2051.4*

*) Alternative technical data, see facts & data.

RST2013 ATEX, DEVICE CONNECTOR, M25, 3-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ² - 4 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 1,5 mm ² - 4 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female

male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	X6.031.5053.1	X6.032.5053.1
□ light grey	250 V with PE	L, N, PE	X6.031.5053.0	X6.032.5053.0
■ leaves green	250/400 V with PE	1, 2, PE	X6.031.5055.7	X6.032.5055.7
■ signal brown	~50/-120 V with PE	1, 2, PE	X6.031.5051.4	X6.032.5051.4

female

male



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	X6.033.6253.1	X6.034.6253.1

SPRING CLAMP CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	2	Connection cross section 1,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female

male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250 V with PE	L, N, PE	X6.031.1053.1*	X6.032.1053.1*
□ light grey	250 V with PE	L, N, PE	X6.031.1053.0*	X6.032.1053.0*
■ leaves green	250/400 V with PE	1, 2, PE	X6.031.1055.7*	X6.032.1055.7*
■ signal brown	~50/-120 V with PE	1, 2, PE	X6.031.1051.4*	X6.032.1051.4*

*) Alternative technical data, see facts & data.

RST20I3 ATEX, DISTRIBUTOR, 3-POLE



TECHNICAL DATA			
Rated current:	20 A	Lockable:	self-locking (unlocking by tool)
Degree of protection (IP): IP66/68 (3m;2h) /IP69		Additional technical data, see facts & data.	

distribution block 1I / 3O, parallel connection, with fastening option

Color of coding	Application	Marking of poles	Art.No.
■ black	250 V with PE	L, N, PE	X6.030.0153.1

RST20I4 ATEX, CONNECTOR, 4-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 1,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	X6.041.4053.1	X6.042.4053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	X6.041.4053.0	X6.042.4053.0

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	X6.041.4153.1	X6.042.4153.1
□ light grey	250/400 V with PE	1, 2, 3, PE	X6.041.4153.0	X6.042.4153.0

RST20I4 ATEX, DEVICE CONNECTOR, M20, 4-POLE

SCREW CONNECTION

TECHNICAL DATA			
Rated current:	20 A	Cross section fine-stran-	1,5 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:	
Terminations per pole:	1	Connection cross section	1,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:	
		Additional technical data, see facts & data.	

female



male



modular, straight

			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	X6.041.6053.1	X6.042.6053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	X6.041.6053.0	X6.042.6053.0

RST20I4 ATEX, DEVICE CONNECTOR, M25, 4-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded:
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:
Terminations per pole:	1	Additional technical data, see facts & data.
Lockable:	self-locking (unlocking by tool)	

female



male



standard, straight			female	male
Color of coding	Application	Marking of poles	Art.No.	Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	X6.041.5053.1	X6.042.5053.1
□ light grey	250/400 V with PE	1, 2, 3, PE	X6.041.5053.0	X6.042.5053.0
■ signal brown	~50/-120 V	1, 2, 3, 4	X6.041.5051.4	X6.042.5051.4

RST20I5 ATEX, CONNECTOR, 5-POLE

SCREW CONNECTION

TECHNICAL DATA

Rated current:	20 A	Cross section fine-stranded:	1,5 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	Connection cross section solid:	1,5 mm ² - 2,5 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.	
Lockable:	self-locking (unlocking by tool)		

female



male



straight, for cables Ø 6-10 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	X6.051.4053.1	X6.052.4053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	X6.051.4053.0	X6.052.4053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	X6.051.4053.9	X6.052.4053.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	X6.051.4053.6	X6.052.4053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	X6.051.4051.4	X6.052.4051.4

female



male



straight, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	X6.051.4153.1	X6.052.4153.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	X6.051.4153.0	X6.052.4153.0
■ light blue	250/400 V	1, 2, 3, 4, 5	X6.051.4153.9	X6.052.4153.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	X6.051.4153.6	X6.052.4153.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	X6.051.4151.4	X6.052.4151.4

female



male



straight, for cables Ø 13-18 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	X6.051.4553.1	X6.052.4553.1

female



splitter connector, for cables Ø 10-14 mm

Color of coding	Application	Marking of poles	female Art.No.
□ light grey	250/400 V with PE	1, 2, 3, N, PE	X6.051.4353.0

RST20I5 ATEX, DEVICE CONNECTOR, M20, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 1,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



modular, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	X6.051.6053.1	X6.052.6053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	X6.051.6053.0	X6.052.6053.0
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	X6.051.6053.6	X6.052.6053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	X6.051.6051.4	X6.052.6051.4

female



modular, angled 90°

Color of coding	Application	Marking of poles	female Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	X6.053.6053.1

RST20I5 ATEX, DEVICE CONNECTOR, M25, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	20 A	Cross section fine-stranded: 1,5 mm ² - 2,5 mm ²
Degree of protection (IP):	IP66/68 (3m;2h) /IP69	ded:
Terminations per pole:	1	Connection cross section 1,5 mm ² - 2,5 mm ²
Lockable:	self-locking (unlocking by tool)	solid:
		Additional technical data, see facts & data.

female



male



standard, straight

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	X6.051.5053.1	X6.052.5053.1
□ light grey	250/400 V with PE	1, 2, 3, N, PE	X6.051.5053.0	X6.052.5053.0
■ light blue	250/400 V	1, 2, 3, 4, 5	X6.051.5053.9	X6.052.5053.9
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	X6.051.5053.6	X6.052.5053.6
■ signal brown	~50/-120 V	1, 2, 3, 4, 5	X6.051.5051.4	X6.052.5051.4

male



modular, straight

Color of coding	Application	Marking of poles	male Art.No.
■ turquoise blue	250 V with PE	D1, D2, L, PE, N	X6.052.6253.6

RST® POWER


The high-current connector
for large cross-sections.



FEATURES


- + 4 and 5-pole
- + 50 A rated current
- + Mechanical coding

RST50i4



Mechanical coding (view on connector interface female)	black
Operating voltage (application)	250/400 V with PE
Marking of poles	1, 2, 3, PE

RST50i5



Mechanical coding (view on connector interface female)	black
Operating voltage (application)	250/400 V with PE
Marking of poles	1, 2, 3, N, PE

RST50I4, CONNECTOR, 4-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	50 A	Cross section fine-stranded: 4 mm ² - 16 mm ²
Degree of protection (IP):	IP66/67/69	Connection cross section solid: 4 mm ² - 6 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.
Lockable:	yes	

female



male



straight, for cables Ø 15-25 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	97.041.4053.1	97.042.4053.1

female



male



straight, for cables Ø 20-32 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	97.041.4253.1	97.042.4253.1

RST50I4, DEVICE CONNECTOR, M32, 4-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	50 A	Cross section fine-stranded:
Degree of protection (IP):	IP66/67/69	Connection cross section solid:
Terminations per pole:	1	4 mm ² - 16 mm ²
Lockable:	yes	Additional technical data, see facts & data.

female



male



standard, straight, fixed in position

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	97.041.5553.1	97.042.5553.1

female



male



standard, straight, not fixed in position

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, PE	97.041.5053.1	97.042.5053.1

RST50I5, CONNECTOR, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	50 A	Cross section fine-stranded: 4 mm ² - 16 mm ²
Degree of protection (IP):	IP66/67/69	Connection cross section solid: 4 mm ² - 6 mm ²
Terminations per pole:	1	Additional technical data, see facts & data.
Lockable:	yes	

female



male



straight, for cables Ø 15-25 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	97.051.4053.1	97.052.4053.1

female



male



straight, for cables Ø 20-32 mm

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	97.051.4253.1	97.052.4253.1

RST50I5, DEVICE CONNECTOR, M32, 5-POLE

SCREW CONNECTION

TECHNICAL DATA		
Rated current:	50 A	Cross section fine-stranded:
Degree of protection (IP):	IP66/67/69	Connection cross section solid:
Terminations per pole:	1	4 mm ² - 16 mm ²
Lockable:	yes	Additional technical data, see facts & data.

female



male



standard, straight, fixed in position

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	97.051.5553.1	97.052.5553.1

female



male



standard, straight, not fixed in position

Color of coding	Application	Marking of poles	female Art.No.	male Art.No.
■ black	250/400 V with PE	1, 2, 3, N, PE	97.051.5053.1	97.052.5053.1

RST50, ACCESSORIES



cover cap for female and male




Color	Art.No.
■ black	Z5.567.5653.0



sample case, RST50i5

Art.No.
99.628.0000.0

FACTS & DATA

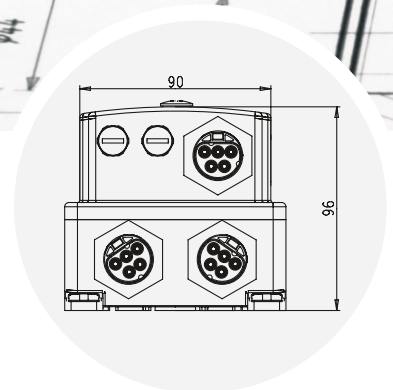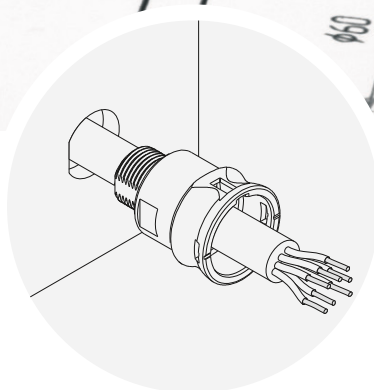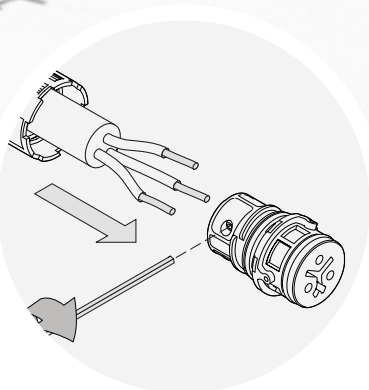



General notes	206
General technical data	208
Technical data + notes	
RST® MICRO	212
RST® MINI	218
RST® CLASSIC	228
RST® CLASSIC ATEX	229
RST® POWER	238
RST® DISTRIBUTOR	244



GENERAL NOTES

Safety notes

- All components must be installed, commissioned, and serviced only by trained electricians.
- Observe the country-specific regulations for installation.
- Installation connector systems are no substitute for national plug/socket systems for domestic use.
- The connectors are not suitable for current interruption. Never remove or insert the connector under load.
- Connectors with dissimilar voltages must not be joined.
- Potentially-hazardous interchangeability with installation connector systems of other manufacturers is not automatically ruled out through compliance with DIN VDE 0606 T200 or IEC 61535.

Installation notes

- According to the directive, voltage carrying part must be a female connector.
Mounting of a ring line with standards-compliant design therefore not possible.
- The connectors must be protected from bending forces by further measures (e.g. no loads suspended from cables; cable rewinds not hanging freely, etc.).
- Choose a horizontal installation position to ensure water drains away. In accordance with installation regulation IEC 60364-5-52 (DIN VDE 0100-522.3), cable systems must be designed in such a way that damage caused by the ingress of water is avoided.
- Cable and conductor systems must conform to the required protection rating. If water can accumulate or condense, precautions to ensure water drainage must be taken. This applies in particular for the sealing points in the strain relief area.
- If abrasion is possible (flexible installations), cable assembly wear must be taken into account and monitored.
- Avoid kinking the cable in the strain relief area. Minimum bending radii must be respected.
- Absorption of mechanical bending movements in the strain relief area through suitable measures (e.g. cable clamps).
- For connectors with contact seals: Use only one connector with contact sealing, either male or female connector.
- To guarantee compliance with the IP protection rating, cover caps (accessories) must be mounted on all unassigned male or female connectors.
- The installation regulation IEC 60364-5-52 (VDE 0100-520) must be respected.

GENERAL NOTES

Other important notes

- Protection against contact with live parts generally guaranteed, even in the unmated condition.
- For connectors with yellow/green conductor: The connectors are designed such that the yellow/green conductor contact is always leading.
- All components can be locked together.
- The contacts are protected to prevent tensile load on the cable. If the connector is placed under an unusually high tensile load, it will disengage to prevent the wires being pulled out of the contacts and causing a hazard (except RST® POWER).
- The connector system is not designed for permanent operation under water. Unscheduled immersion is, however, possible within the specification.
- Installing the system components directly in the ground is not envisaged. According to IEC 60364-5-52 (VDE 0100-520), connectors must be protected using suitable additional facilities and must be accessible for visual inspection, testing, and maintenance.
- Can be connected only when polarity is correct; 1-pole not contactable.
- 2-pole connectors are in 3-pole housings, one pole is unassigned.
- 4-pole connectors are in 5-pole housings, one pole is unassigned.
- 6-pole connectors are in 7-pole housings, one pole is unassigned.
- In chlorinated atmospheres, only variants with screw and crimp connections may be used.



INFO TO GO

Further information about the correct installation can be found in our white paper "Installation notes for electrical installations in outdoor areas".



WHITEPAPER RST®

Electrical installation instructions for the outdoor area

Bestell-Nr. 0693.1



GENERAL TECHNICAL DATA

Cable assemblies

Versions of the free ends:

	Sheath strip length	Wire strip length
RST standard	35 mm	9 mm
RST20i2 pole socket	300 mm	9 mm
RST20i3 pole socket	300 mm	9 mm

Overview of wire colors and pole configurations

RST08i2	
black	1 = brown, 2/N = blue
pebble gray, slate gray	1 = blue, 2 = brown
light blue	1 = brown, 2/N = blue
RST08i3	
black	1 = brown, 2/N = blue, PE = green / yellow
pebble gray	1 = blue, 2 = brown, PE = green / yellow
RST16i2	
black	N = blue, L = brown
signal brown	1 = blue, 2 = brown
RST16i3	
black	L = brown, N = blue, PE = yellow / green
RST16i5	
black	1 = brown, 2 = black, 3 = gray, N = blue, PE = yellow / green
turquoise	1 = gray, 2 = black, L = brown, N = blue, PE = yellow / green
RST 20i2	
black	N = blue, L = brown
signal brown	1 = blue, 2 = brown
pebble gray	- = blue, + = brown
RST 20i3	
black	L = brown, N = blue, PE = yellow / green
leaf green	1 = brown, 2 = blue, PE = green / yellow
light blue	1 = black, 2 = gray, 3 = brown
RST20i4	
black	1 = brown, 2 = black, 3 = blue, PE = yellow / green
RST20i5	
black, light gray	1 = brown, 2 = black, 3 = gray, N = blue, PE = yellow / green
turquoise	D1 = gray, D2 = black, L = brown, N = blue, PE = yellow / green
RST25i3	
Concrete gray	L = brown, N = blue, PE = yellow / green
RST25i5	
Concrete gray	1 = brown, 2 = black, L = gray, N = blue, PE = yellow / green

 This pole configuration is also our recommendation for the connector / device connector interface executed by the customer.



GENERAL TECHNICAL DATA

Definition of our numerical code

A logical structure makes ordering easy

Our numerical code saves time and effort when ordering our cable assemblies. Your needs can be compiled quickly and efficiently.

The way it works is simple and refers to our part numbers, which have a consistent structure. Your customized product can be ordered in just a few steps.

			→	96.	232.	30	6	3.	1
Connector system									
	RST® MICRO	RST08		41./4L.					
	RST® MINI	RST16		46.					
	RST® CLASSIC	RST20		96.					
Cable type and diameter									
2-pole	0.75 mm ²	RST08i2			427.				
2-pole	1.5 mm ²	RST16i2			422.				
2-pole	2.5 mm ²	RST16i2			423.				
2-pole	1.5 mm ²	RST20i2			222.				
2-pole	2.5 mm ²	RST20i2			223.				
3-pole	0.75 mm ²	RST08i3			437.				
3-pole	1.5 mm ²	RST16i3			432.				
3-pole	2.5 mm ²	RST16i3			433.				
3-pole	0.75 mm ²	RST20i3			230.				
3-pole	1.0 mm ²	RST20i3			231.				
3-pole	1.5 mm ²	RST20i3			232.				
3-pole	2.5 mm ²	RST20i3			233.				
3-pole	4.0 mm ²	RST25i3			834.				
4-pole	1.5 mm ²	RST20i4			442.				
4-pole	2.5 mm ²	RST20i4			443.				
5-pole	1.5 mm ²	RST20i5, RST16i5			452.				
5-pole	2.5 mm ²	RST20i5, RST16i5			453.				
5-pole	2.5 mm ²	RST25i5			853.				
5-pole	4.0 mm ²	RST20i5			454.				
5-pole	4.0 mm ²	RST25i5			854.				
Length									
Length incl. female / male connector up to 10 m in dm (example: 3.0 m = 30 dm)						30			
Type of cable, material, and fire class									
H05VV-F	PVC	RST20i2...i5, RST16i2...i3, RST16i5						0	
H07RN-F/H05RN-F	Rubber	RST20i2...i5, RST16i2...i3, RST16i5, RST08i2...i3						3	
H07RN-F EV	Rubber / Halogen-free	RST20i3, RST20i5, RST16i5						5	
H05Z1Z1-F, Eca	Halogen-free	RST20i2...i3, RST20i5, RST16i2...i3, RST16i5						6	
Ölflex classic 110	PVC	RST20i2, RST20i4...i5						8	
H05Z1Z1-F, B2ca	Halogen-free	RST20i2...i3, RST20i5, RST16i2...i3, RST16i5						B	
H05Z1Z1-F, Cca	Halogen-free	RST20i3, RST20i5, RST16i3, RST16i5						C	
H05Z1Z1-F, Dca	Halogen-free	RST20i3, RST20i5, RST16i5						D	
Type of assembly									
Extension	Male - female	250 V						0.	
Extension	Male - female	250 V/400 V						1.	
Extension	Male - female	~ 50 V/- 120 V						2.	
Connection cable	Female - free end	250 V						3.	
Connection cable	Male - free end	250 V						4.	
Connection cable	Female - free end	250 V/400 V						5.	
Connection cable	Male - free end	250 V/400 V						6.	
Connection cable	Female - free end	~ 50 V/- 120 V						7.	
Connection cable	Male - free end	~ 50 V/- 120 V						8.	
Colors / codings									
light grey		RST20i2...i5, RST20i7, RST16i2...i5						0	
black		RST20i2...i5, RST20i7, RST16i2...i5, RST08i2...i3						1	
concrete grey		RST25i3, RST25i5						3	
signal brown		RST20i2...i5, RST16i2...i5						4	
slate grey		RST08i2...i5						4	
turquoise blue		RST20i2...i7, RST16i2...i3, RST16i5						6	
leaves green		RST20i2...RST20i3, RST16i2...i3						7	
pebble grey		RST20i2...i3, RST08i2...i5						8	
light blue		RST20i3, RST20i5, RST20i7, RST16i2...i3, RST16i5, RST08i2...i5						9	



GENERAL TECHNICAL DATA

IP ratings

Definition of IP ratings (DIN EN 60529-1)

IP

1st digit

2nd digit

68

Example

IP ratings against ingress of objects and contact		IP ratings against ingress of water	
	Protection against contact		Protection against ingress of water
0	No protection	0	No protection
1	Any large surface of the body (e.g. back of hand)	1	Protection against vertically falling drops
2	Finger	2	Protection against diagonally (up to 15°) falling water drops
3	Tools and wires (> 2.5 mm in diameter)	3	Protection against spraying water up to 60° to the vertical
4	Tools and wires (> 1.0 mm in diameter)	4	Protection from splashing water from any direction
5	Complete protection against contact	5	Protection against jet spray water
6	Complete protection against contact	6	Protection against powerful water jets
7		7	Protection against temporary immersion in water
8		8	Protection against continuous immersion in water
9		9	Protection against high pressure, high temperature spray downs

GENERAL TECHNICAL DATA

Always the right cable

One of the decisive factors for the longevity of your system is the perfect interplay between the materials used in order to be able to withstand the different environmental conditions

While all connectors and distributors are designed for permanent operation indoors and outdoors, things are a little different when it comes to the cables. The selection of the appropriate cable is of utmost importance for the durable operation of the installation.

As a standard, we offer the H05VV-F and H05Z1Z1 cable, but its field of application is limited to indoor use. These cables are not suitable for outdoor use and permanently damp or wet rooms! The protection against foreign bodies (IP 6X) is in the foreground here. Temporary moisture for cleaning purposes is possible.

Temporary outdoor installations without special requirements can be realized with the rubber hose cable H07RN-F, whereby it must also be checked here whether an additional measure, such as laying in installation pipes, is necessary.

In the event that installations are directly exposed to environmental influences over a longer period of time, the selection of the suitable cable must be discussed with Wieland.



H05VV-F PVC CABLE

Use inside dry rooms, not outdoors, not directly in the ground.

No UV resistance.

- **Minimum bending radius:**
4 x outside diameter
- **Service temperature:**
5 °C (laying and handling)
to +70 °C



H07RN-F RUBBER-SHEATHED CABLE

Use inside dry, damp, and wet rooms, as well as outdoors, but not directly in the ground.

Limited UV resistance.

- **Minimum bending radius:**
4 x outside diameter
- **Service temperature:**
from -25 °C to +60 °C



H07RN-F (ENHANCED VERSION) EN- HANCED RUBBER-SHEATHED CABLE

Use inside dry, damp, and wet rooms, as well as outdoors due to UV and ozone resistance. The cable is halogen-free and flame-retardant. But do not lay the cable directly in the ground.

- **Minimum bending radius:**
4 x outside diameter
- **Service temperature:**
from -50 °C to +90 °C



RST® MICRO TECHNICAL DATA

	RST08i2/i3	RST08i4/i5
Rated voltage	250/400 V	250/400 V
Rated current	8 A	8 A
Number of poles	2- or 3-pole	4- or 5-pole
Connectable cable diameter*	4 - 7 mm	5 - 10.6 mm
Connector temperature range	- 40 °C to +100 °C	
Material	Contact parts: Brass, surface-treated	
	housing parts: Polyamide, halogen free, V0, f1	
	Sealing material: NBR	
Pollution degree	3 (when connected)	
Protection rating	IP66/68 (3m; 2h)/69 barrier seal optional	
Certificates / approvals	VDE (to IEC 61984), cULus, LR, DNV/GL, RINA, BV	


*Other diameters on request

RST® MICRO DIMENSIONS


RST08i2/i3

CONNECTORS

female




male

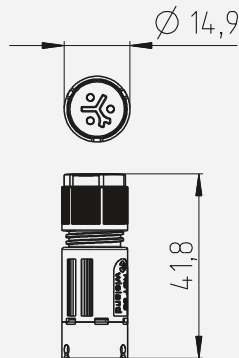


DEVICE CONNECTOR

female




male




DISTRIBUTORS

1E / 3A




1E / 2A




RST08i4/i5

CONNECTORS

female

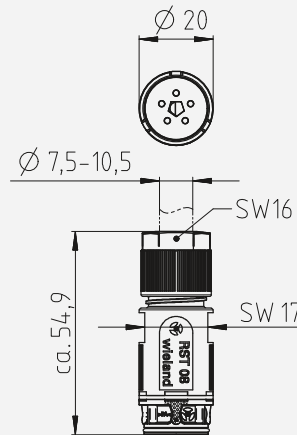


male

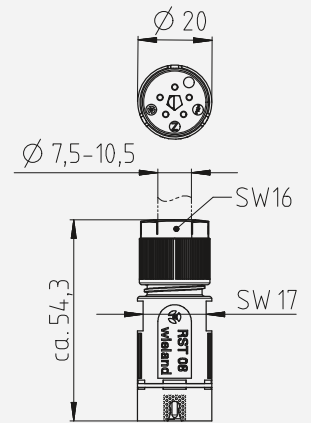


DEVICE CONNECTOR

female




male




DISTRIBUTORS

1E / 3A

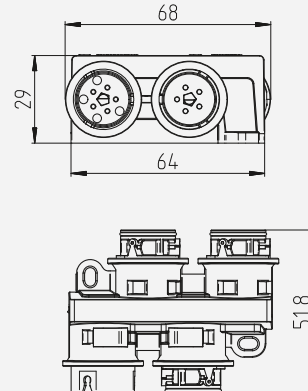

1E / 2A

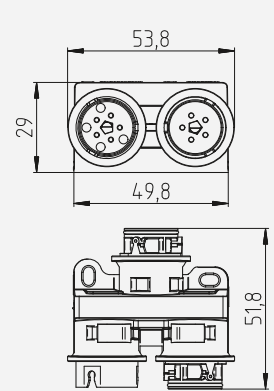

NOTE: The drawing for your product can be found in the Download area of the relevant Art.No. at eshop.wieland-electric.com

RST[®] MICRO CABLE PREPARATION

Connectable conductor cross-sections


Conductor	Solid	Fine-stranded, no cable end sleeve	Fine-stranded, with cable end sleeve
Screw connection	0.2 - 1.0 mm ² / AWG 24 - 16	0.22 - 1.0 mm ² / AWG 24 - 16	0.22 - 0.50 mm ²

*Ferrules without insulating collars must be used.

i RST[®] terminals with screw clamping allow the connection of conductors without special preparation according to EN 60999-1.

Sheath strip and wire strip lengths

Conductor	PE	N, L
Sheath strip length y	19	18
Wire strip length x	6	6

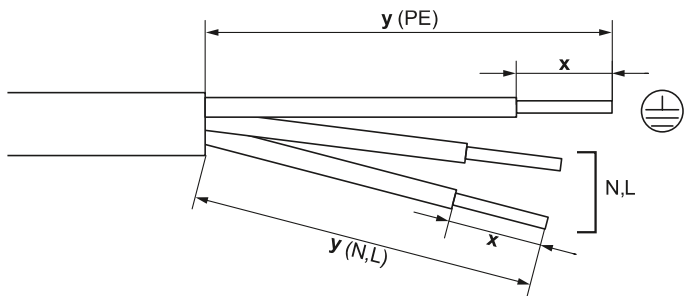

RST® MICRO MATERIAL RESISTANCE

Medium	Connector & device connector	Distributors
Acytelene C ₂ H ₂	✓	
Alcohols	✓	✓
Amonia sulfuric acid = amonium sulfate	✓	
Ammonium chloride (Salmjak)	✓	
Ammonium sulfate 10 %	✓	
Butylalkohol (Butanol)	✓	
Butyl alcohol (butanol)	✓	
Citric acid, aqueous, 10%	✓	✓
Fruit juices, fruit acids	✓	
Glycerin	✓	
Potassium chloride	✓	
Common salt, (sodium chloride) aqueous, 10%.	✓	
Nickel chloride (II) saturated	✓	
Phosphates	✓	
Mercury pure	✓	
Sulfur hexafluoride	✓	
Water (sea water, salt water)	✓	✓


We use the thermoplastic material polyamide for our products. The table above shows an extract of substances and the resistance of polyamide at room temperature approx. 20 °C. Contact our customer service to have the material resistance to the substances confirmed or if you have other substances in use that are not included in this list.



RST[®] MICRO DERATING CURVES


RST08i2

Derating curve to DIN EN 60512 Part 5-2; Test 5b

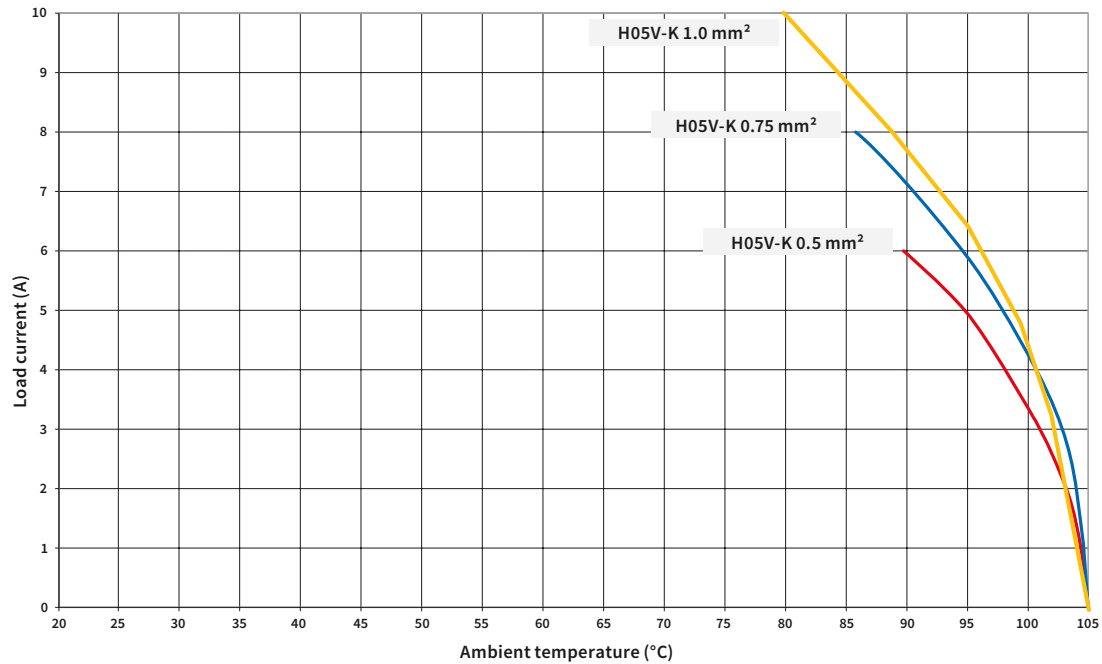


RST08i3

Derating curve to DIN EN 60512 Part 5-2; Test 5b

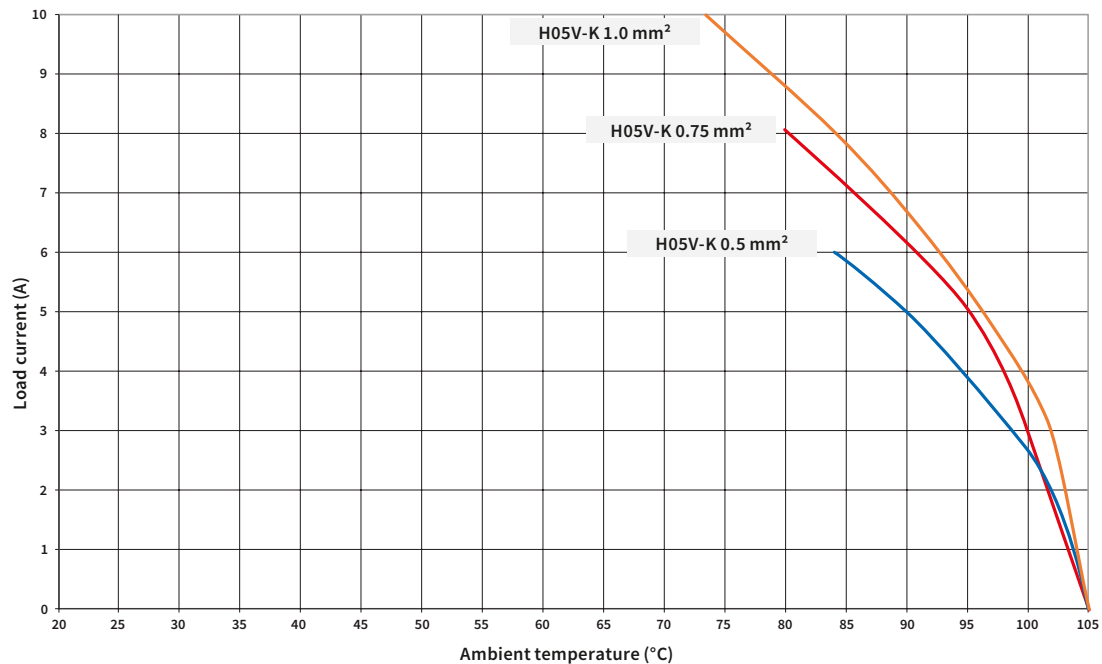


RST® MICRO ASSEMBLY INSTRUCTION

CABLE ASSEMBLY

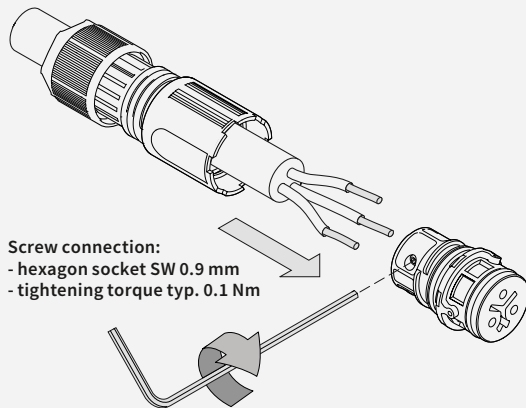


CLOSING THE CONNECTOR


Gland nut gripping sleeve (3): Tightening torque typ. 0.8 Nm.

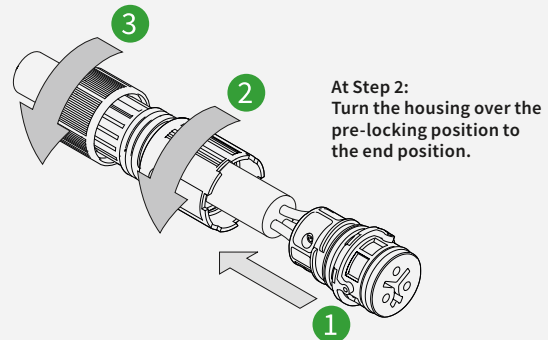

INSERT AND LOCK

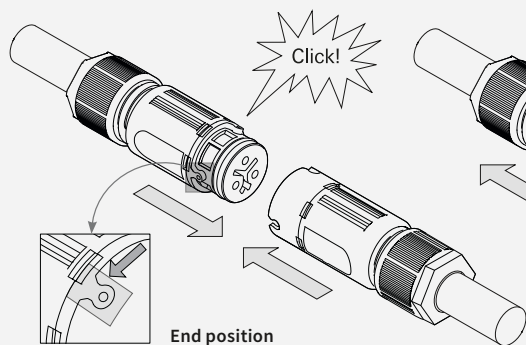


UNLOCK AND DISCONNECT

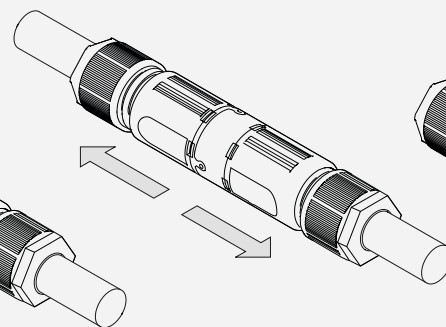


OPENING THE CONNECTOR

The cover cap makes the connector easier to open.

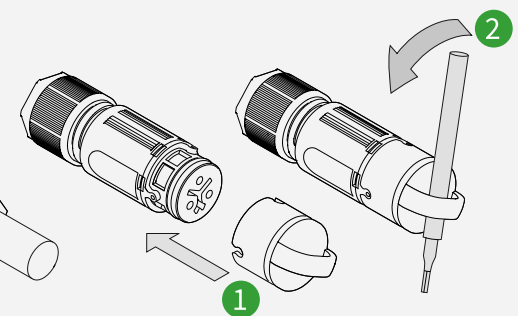


HOUSING INSTALLATION WITH M14 CABLE FEED THROUGH

Nut: Tightening torque typ. 0.7 Nm.

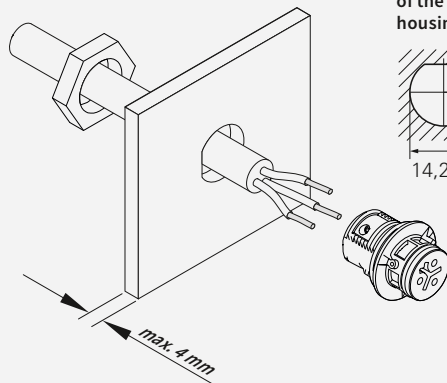


Dimension drawing
of the opening for
housing installation.




COVER CAP TO DEVICE CONNECTOR

Install device connector before
attaching the cover cap.



Pull the rubber strap over the
collar of the device connector.



WARNING: The rubber strap is not suitable as sealing!

i Proceed in the same way for 2 and 3-pole connectors.
Observe the pole configuration.

NOTE: Please note that electrical connections and installations must be carried out only by appropriately trained specialists.

The Assembly instructions accompanying the product must be observed! The relevant Assembly instruction BA001157 can be found online in the download area of the product concerned: eshop.wieland-electric.com

RST® MINI TECHNICAL DATA

	RST16i2/i3	RST16i4/i5
Rated voltage	250/400 V	250/400 V
Rated current	16 A	16 A
Number of poles	2- or 3-pole	4- or 5-pole
Connectable cable diameter*	5.0 - 9.5 mm, 7.1 - 13 mm	7.1 - 13 mm, 10 - 14.5 mm
Connector temperature range	- 40 °C to 100 °C	
Material	Contact parts: Brass, surface-treated	
	Housing parts: Polyamide, halogen-free, V2	
	Sealing material: NBR	
Pollution degree	3 (when connected)	
Protection rating	IP66/68 (3m; 2h)/69	
IK code	IK07 (2 joules)	
Mating cycles	according to IEC 61535 100x without load and 50x under nominal load (cos phi = 0.6)	
Certificates / approvals	VDE (IEC 61535), UL (UL 2238)**; CSA (C22.2 No.182.1 / C22.2 No.182.3), RINA, LR, DNV/GL, BV	

*Other diameters on request


**The light gray coding is excluded from this

RST® MINI DIMENSIONS


RST16i2/i3

CONNECTOR

female


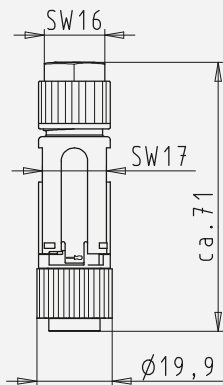


male


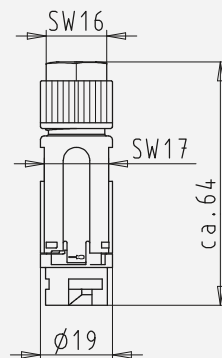


DEVICE CONNECTOR

female





male



DISTRIBUTOR


1E / 2A




RST16i4/i5

CONNECTOR

female


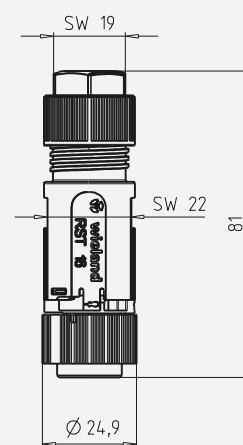


male

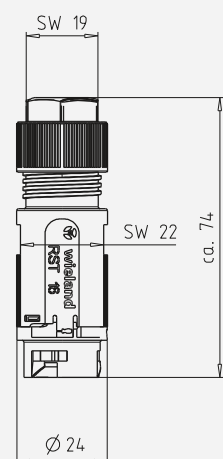


DEVICE CONNECTOR

female





male



DISTRIBUTOR

1E / 2A



NOTE: The drawing for your product can be found in the Download area of the relevant Art.No. at eshop.wieland-electric.com



RST® MINI CABLE PREPARATION

Connectable wires according to IEC

Screw connection (Connector and Device connector)

	Solid	Fine wired, no ferrules ¹⁾	Fine wired, with ferrules
RST16i2/i3	0.2 - 2.5 mm ²	0.25 - 2.5 mm ²	0.25 - 1.5 mm ²
RST16i4/i5	0.2 - 2.5 mm ²	0.25 - 2.5 mm ²	0.25 - 1.5 mm ²

1) The RST® range of screw terminal connectors is suitable for connecting unprepared cables to EN 60999-1

Spring clamp connection MOLA (only Device connector)

	Solid	Fine wired, ultrasonically welded	Fine wired, with ferrules
Connecting channel A (large)	1.0 - 2.5 mm ²	1.0 - 2.5 mm ²	1.0 - 1.5 mm ²
Connecting channel B (small)	0.5 - 1.0 mm ²	0.75 - 1.0 mm ²	0.5 mm ²

Connectable wires according to UL

Screw connection (Connector and Device connector)

	Solid	Multi stranded, no ferrules	Multi stranded, with ferrules	Multi stranded, ultrasonically welded
RST16i2/i3	AWG 24 - 14	AWG 24 - 14	AWG 24 - 16	AWG 18 - 14
RST16i4/i5	AWG 22 - 14	AWG 22 - 14	AWG 22 - 20	AWG 18 - 14


Spring clamp connection MOLA (only Device connector)

	Solid	Multi stranded, ultrasonically welded	Multi stranded, with ferrules
Connecting channel A (large)	AWG 18 - 14	AWG 18 - 14	AWG 18 - 16
Connecting channel B (small)	AWG 18	AWG 18	AWG 18

Stripping and stripping lengths


Screw connection (Connector and Device connector)

Conductor	PE	N, L, 1, 2, 3
Sheath strip length y	30	25
Wire strip length x	8	8

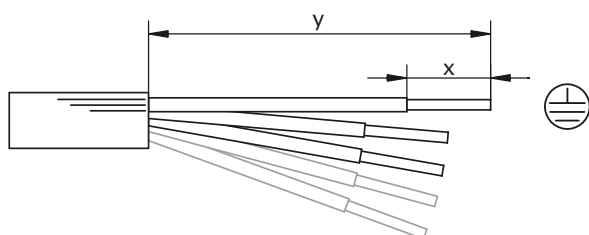

Spring clamp connection MOLA (only Device connector)

Connection channel	
A (large)	10±0,5mm
B (small)	8.5±0.5 mm

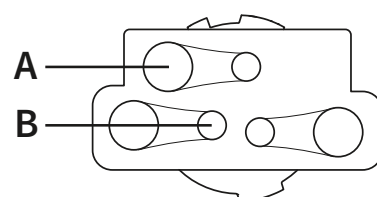

RST® MINI MATERIAL RESISTANCE

Medium	Connectors, Device Connectors & Distributors
Alcohols	✓
Ammonium chloride (Salmjak)	✓
Ammonium sulfate 10 %	✓
Citric acid, aqueous, 10%	✓
Fruit juices, fruit acids	✓
Glycerin	✓
Potassium chloride	✓
Common salt, (sodium chloride) aqueous, 10%	✓
Nickel chloride (II) saturated	✓
Mercury pure	✓
Sulfur hexafluoride	✓
Water (sea water, salt water)	✓


We use the thermoplastic material polyamide for our products. The table above shows an extract of substances and the resistance of polyamide at room temperature approx. 20 °C. Contact our customer service to have the material resistance to the substances confirmed or if you have other substances in use that are not included in this list.



RST[®] MINI DERATING CURVES


RST16i2/RST16i3

Derating curve to DIN EN 60512-2, Date: 2003-1

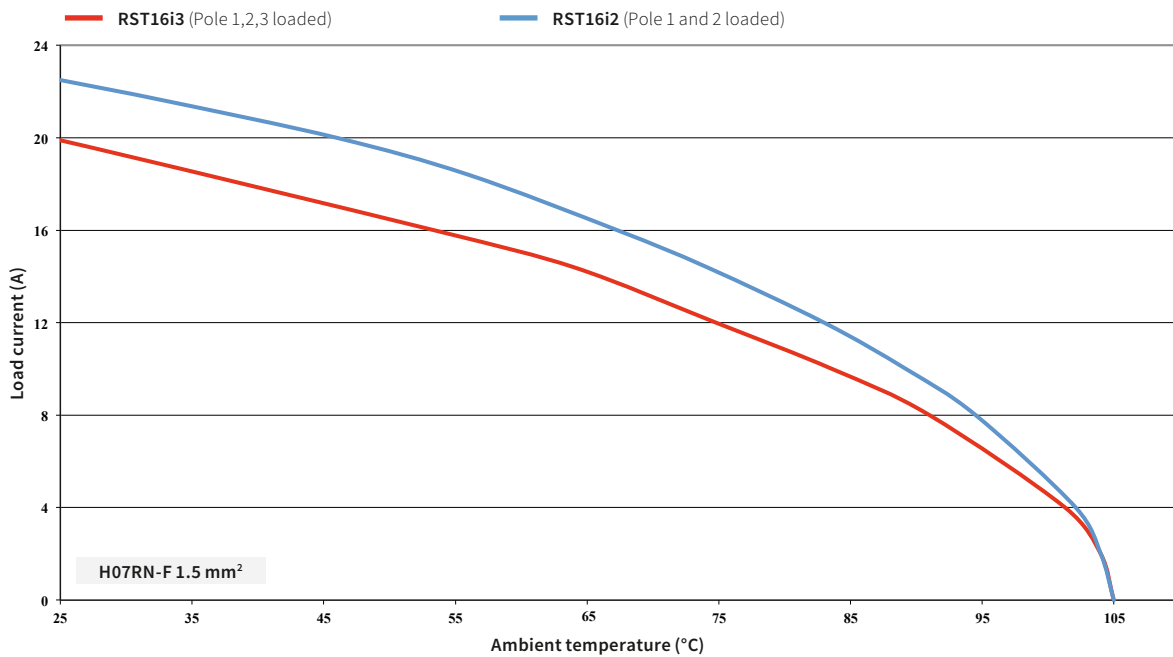

RST16i4/RST16i5


Derating curve to DIN EN 60512-2, Date: 2003-1

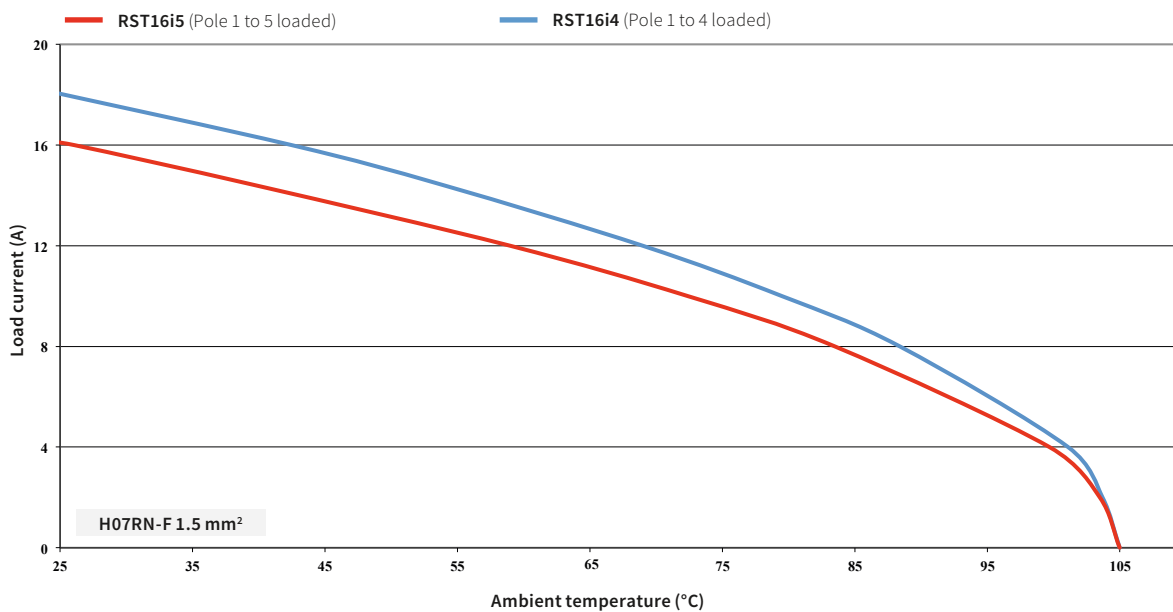

RST[®] MINI DERATING CURVES


RST16i2/RST16i3

Derating curve to DIN EN 60512-2, Date: 2003-1

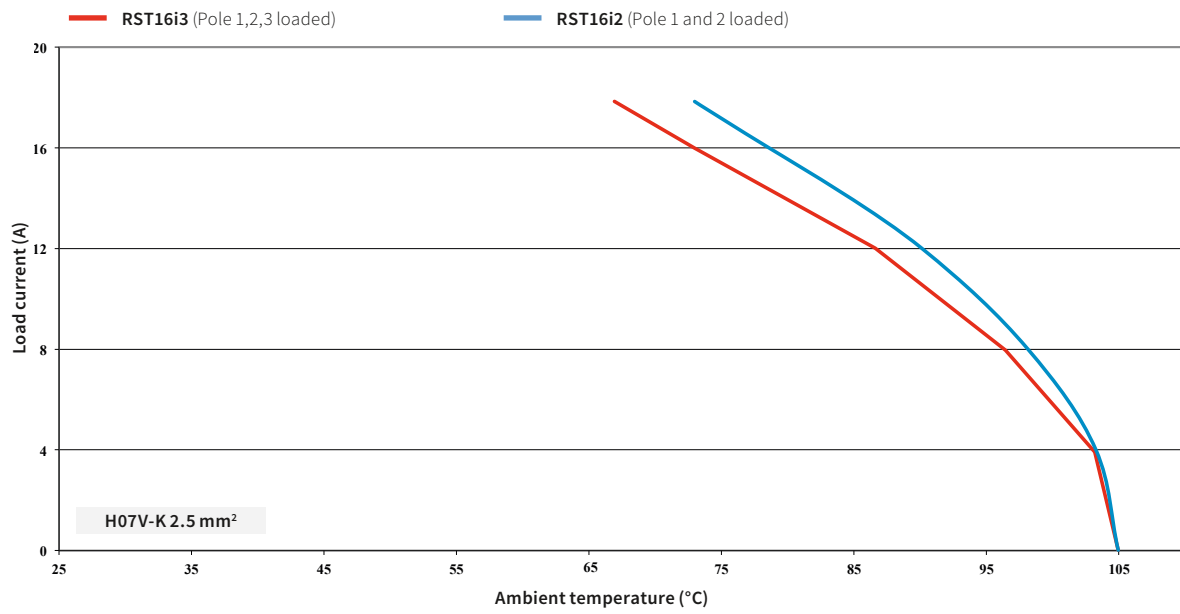

RST16i4/RST16i5

Derating curve to DIN EN 60512-2, Date: 2003-1

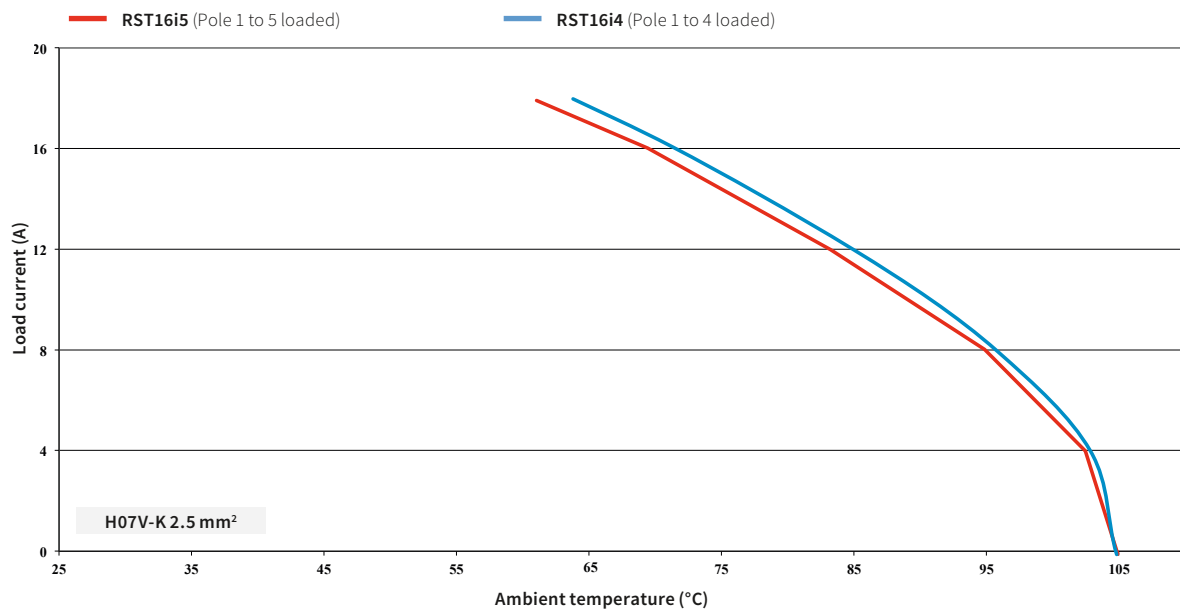


RST® MINI ASSEMBLY INSTRUCTION


CABLE ASSEMBLY

Screw connection:

- Blade DIN 5264 A, ground
- Drive PZ1
- Tightening torque: 2-, 3-pole: 0.4 Nm 4-, 5-pole: 0.5 Nm

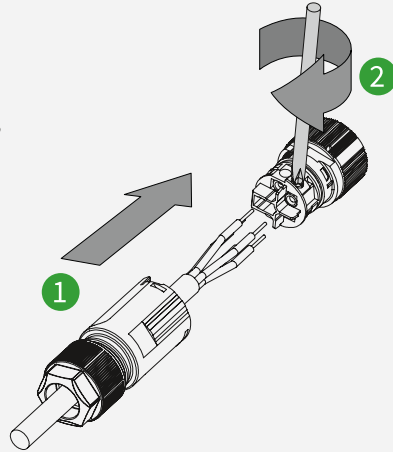


CLOSING THE CONNECTOR

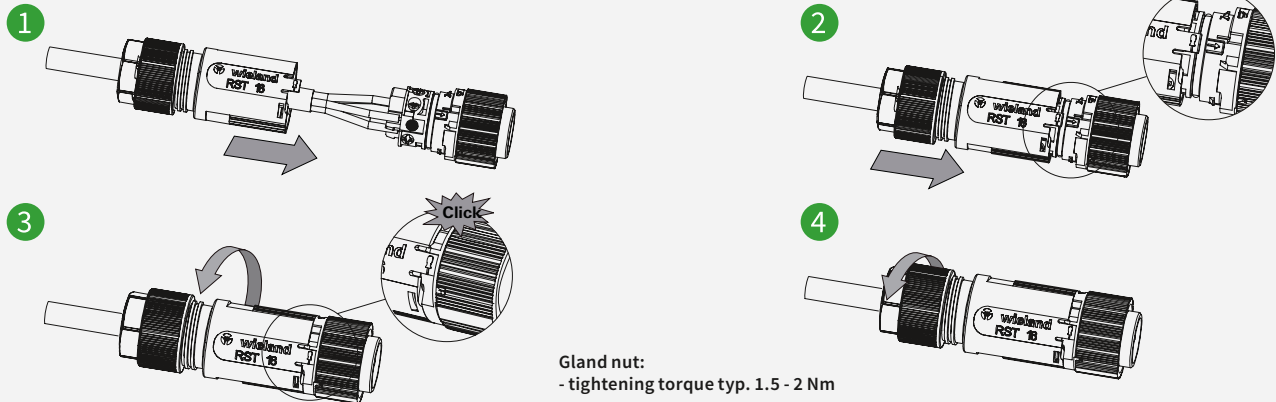


INSERT AND LOCK

Connectors lock automatically

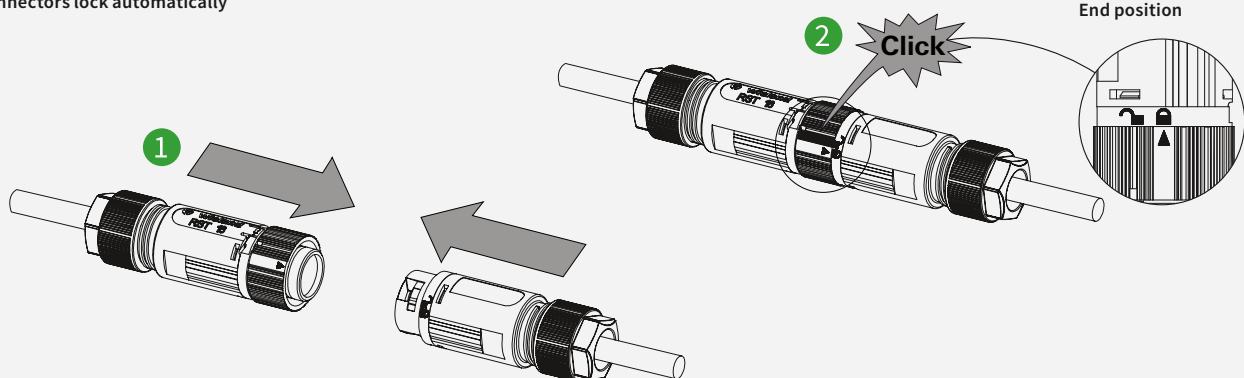


UNLOCK AND DISCONNECT

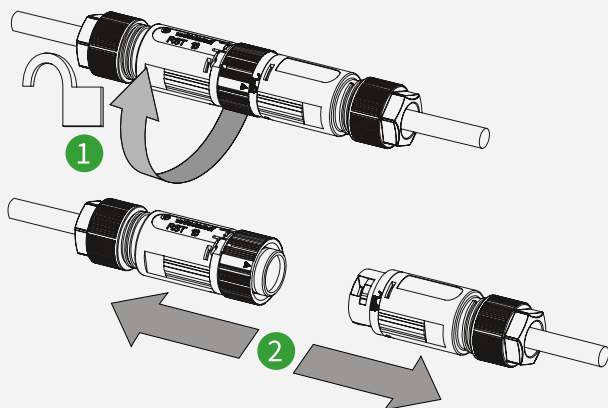


OPENING THE CONNECTOR

Screwdriver: Blade DIN 5264 A, ground

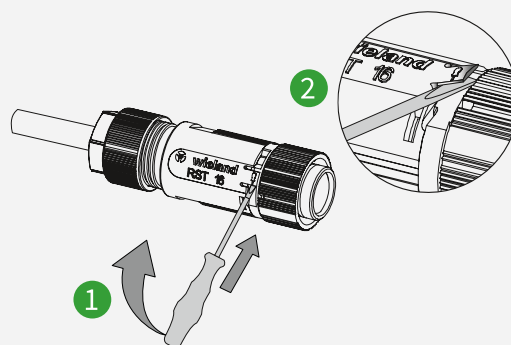


HOUSING INSTALLATION

Nut: Tightening torque typ. 1.5 Nm

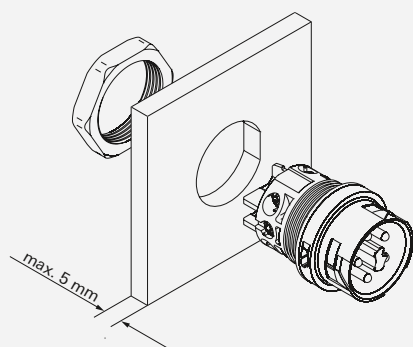


Dimension drawing of the opening for housing installation.




	D (mm)	d (mm)
2-, 3-pole	16.2 ± 0.1	14.6 ± 0.1
4-, 5-pole	20.4 ± 0.1	19.4 ± 0.1

COVER CAP TO DEVICE CONNECTOR

Install device connector before attaching the cover cap.

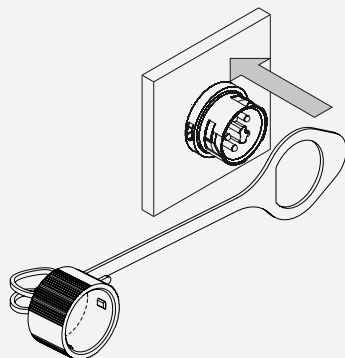

Pull the rubber strap over the collar of the device connector.



WARNING: The rubber strap is not suitable as sealing!

i Proceed in the same way for 2 to 5-pole connectors.
Observe the pole configuration.


NOTE: Please note that electrical connections and installations must be carried out only by appropriately trained specialists.
The Assembly instructions accompanying the product must be observed! The relevant Assembly instruction BA000960 can be found online in the download area of the product concerned: eshop.wieland-electric.com



RST® MOLA ASSEMBLY INSTRUCTION


WIRING INNER ADAPTER

The inner adapter can be wired up before or after the housing installation.

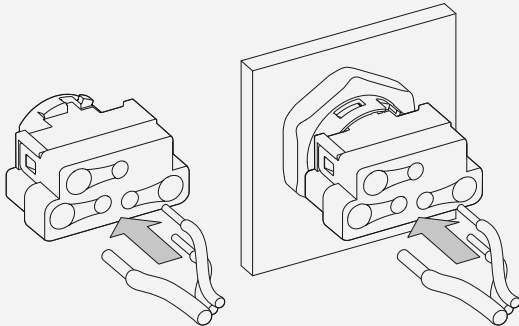


ORIENTATION INNER ADAPTER

Recommended orientation
(View from inside)




HOUSING INSTALLATION

Nut: Tightening torque typ. 1.5 - 2 Nm

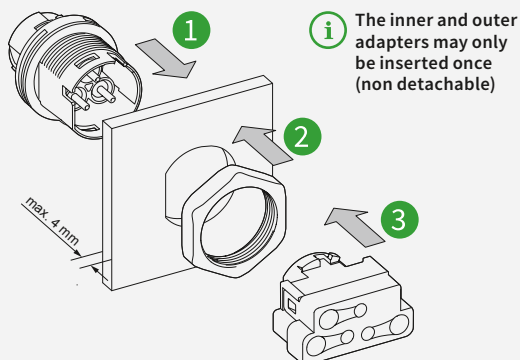


Dimension drawing of the opening for housing installation.



Without anti-rotation lock

D (mm)
20,1 ^{+0,5/-0,1}




With anti-rotation lock


D (mm)	d (mm)
20,1 ^{+0,5/-0,1}	8,3 ^{+0,1}

COVER CAP TO DEVICE CONNECTOR

Install device connector before attaching the cover cap.

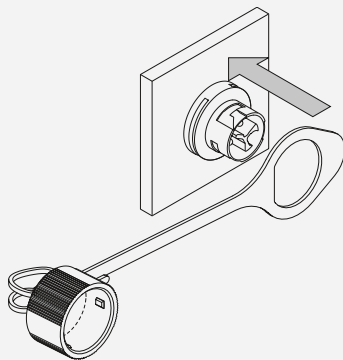

Insert the eyelet of the anti-loss device over the device connection collar, preferably into the circumferential groove of the outer adapter.



WARNING: The rubber strap is not suitable as sealing!

i Proceed in the same way for 2 to 5-pole connectors.
Observe the pole configuration.

NOTE: Please note that electrical connections and installations must be carried out only by appropriately trained specialists.

The Assembly instructions accompanying the product must be observed! The relevant Assembly instruction BA001238 can be found online in the download area of the product concerned: eshop.wieland-electric.com



RST® CLASSIC TECHNICAL DATA

	RST20i2/i3	RST20i4/i5	RST20i6/i7	RST25i3	RST25i5
Rated voltage	250/400 V	250/400 V	250/400 V	250 V	250/400 V
Rated current to IEC 61535:	20 A	20 A		25 A	25 A
Different currents			2,5 mm ² : 3x 20 A + 4x 5 A 1,5 mm ² : 3x 16 A + 4x 4 A (no pole specification)		
Same currents			2,5 mm ² : 7x 15 A 1,5 mm ² : 7x 12 A		
Rated current to IEC 61984:				32 A (bei 6,0mm ²)	32 A (bei 6,0mm ²)
Number of poles	2- or 3-pole	4- or 5-pole	6- or 7-pole	3-pole	5-pole
Connectable cable diameter*	6.0 - 10.0 mm; 8.0 - 12.0 mm; 10.0 - 14.0 mm; 13.0 - 18.0 mm				
Temperature range:	Connector - 40 °C to 100 °C Cable H05VV max 70 °C, H07RN-F max. 60 °C, H07 RN-F enhanced 90 °C				
Material	Contact parts: Brass, surface-treated housing parts: Polyamide, halogen-free, V2 Sealing material: NBR				
Pollution degree	3 (when connected)				
Protection rating	IP66/68 (3m; 2h) / 69, barrier seal for RST20i6/7 optional Cable assembly as a shrink hose variant IP66/68 (3m; 2h) The installation instructions must be followed (refer also to the White Paper "Electrical installation for outdoor areas" Order No. 0693.1)				
IK code	IK 07 (2 joules)				
Glow-wire test	RST20i2-i5/RST25i3/i5: at 850 °C, 30 s RST20i6/i7: at 960 °C, 30 s for connectors, distributors, cable assemblies and device connectors				
Mating cycles	100 x without load and 50 x under nominal load (cos Φ = 0.6) to IEC 61535 Up to 5,000 mating cycles for RST20i2/3 / RST25i3 and 3,000 mating cycles for RST20i4/5 / RST25i5 are possible without load. After approx. 600 mating cycles, the seal should however be tested and re-greased with a suitable lubricant (e.g. Berulub FR 43 UV) if required.				
Certificates / approvals	VDE cULus** TÜV Rheinland LR GL / DNV RINA BV CSA*** UL	VDE cULus** TÜV Rheinland LR GL / DNV RINA BV CSA*** UL	VDE cULus	VDE cULus RINA CSA	VDE cULus RINA CSA
Directives	IEC 61535 IEC 61984 IEC 60999 VDE 0110 UL2238 CSA: C22.2 No.182.2-M1987 LR Type Approval System 2 PfG 1915	IEC 61535 IEC 61984 IEC 60999 VDE 0110 UL2238 CSA: C22.2 No.182.2-M1987 LR Type Approval System 2 PfG 1915	IEC 61535 IEC 61984 IEC 60999 VDE 0110 UL2238	IEC 61535 IEC 61984 IEC 60999 VDE 0110 UL2238 CSA: C22.2 No.182.2-M1987	IEC 61535 IEC 61984 IEC 60999 VDE 0110 UL2238 CSA: C22.2 No.182.2-M1987

*Other diameters on request

**Light gray coding in general and assembled cables in heat shrink technology are excluded from this

***Without assembled cables in heat shrink technology

RST® CLASSIC TECHNICAL DATA

ATEX VARIANTS

	RST20i2/i3	RST20i4/i5
Rated voltage	250/400 V	250/400 V
Rated current	20 A*	20 A*
Number of poles	2- or 3-pole	4- or 5-pole
Connectable cable diameter	6.0 - 10.0 mm; 10.0 - 14.0 mm**	
Device group	II	
Category	3	
Temperature class	T6: 85 °C	
Permissible ambient temperature	- 20 °C to + 40 °C***	
Certificates / approvals	IECEX SEV 15.0024 X; SEV 07ATEX0110X	
Classification	Connectors and device connections: CE1258 Ex II 3G Ex ec IIC T6 Gc CE1258 Ex II 3D Ex tc IIIC T85 °C Dc With assembled cable H05VV-F: CE1258 Ex II 3G Ex ec IIC T6 Gc CE1258 Ex II 3D Ex tc IIIC T70 °C Dc With assembled cable H07RN-F: CE1258 Ex II 3G Ex ec IIC T6 Gc CE1258 Ex II 3D Ex tc IIIC T60 °C Dc"	

Please note the reduction of current carrying capacity in the following cases.

- when using H07RN-F cables:

2-/3-pole	1.5 mm ² - max 14.5 A	2.5 mm ² - max 17.5 A
4-/5-pole	1.5 mm ² - max 12.5 A	2.5 mm ² - max 17.0 A
- when using the double connection:

2 - 5-pole	1.5 mm ² max. 16A
------------	------------------------------
- when using the distribution blocks:

2-/3-pole when using a conductor cross-section of 2.5 mm ² to max 17.5 A

**Other diameters on request

***Extended range of application for subsequent connectors and device terminals with screw connection of types RST20i2/i3 & RST20i4/i5:
Both the 2-/3-pole and the 4-/5-pole systems can be used, at an ambient temperature of +70 °C and using a conductor cross-section of 2.5 mm² with a load current of max 9.4 A for 2-/3-pole and 9.7 A for 4-/5-pole.




NOTE: For the use of the ATEX products, please refer to the further information of the certificate of conformity and assembly instructions. Both documents can be viewed in the download area of the relevant Art.No. of the product at eshop.wieland-electric.com.

RST® CLASSIC DIMENSIONS


RST20i2 – i7

CONNECTORS

female

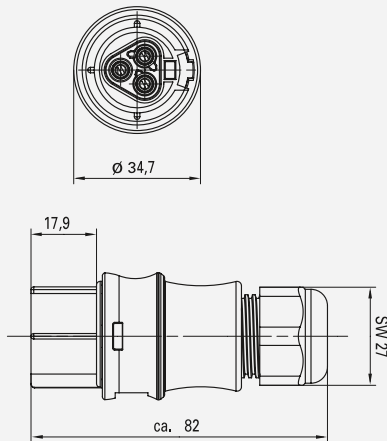


male

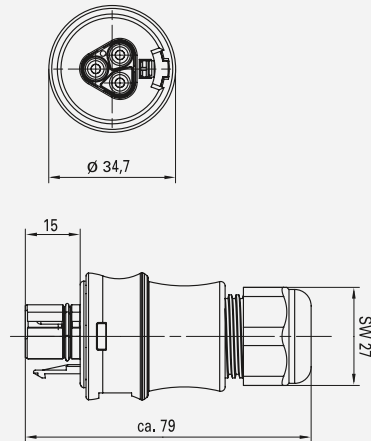


DEVICE CONNECTOR

female


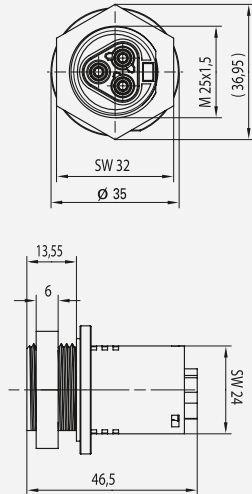


male

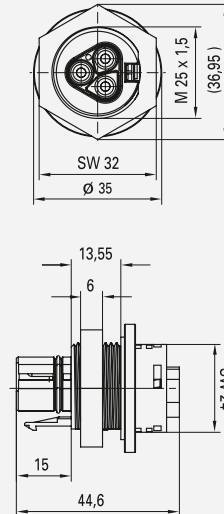

DISTRIBUTORS

1E / 3A

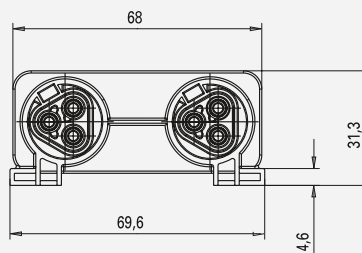

NOTE: Example illustration based on RSTi3 version.

The drawing for your product can be found in the download area of the relevant Art.No. at eshop.wieland-electric.com

RST® CLASSIC CABLE PREPARATION

Connectable conductor cross-sections Standard variants

RST20i2/i3/25i3	Solid	Fine-stranded, no cable end sleeve	Fine-stranded, with cable end sleeve	Multi-stranded	Fine-stranded, ultrason. welded
Screw connection	0.75 - 6 mm ² / AWG 16 - 10	0.75 - 6 mm ²	0.75 - 4 mm ²	0.75 - 6 mm ² / AWG 16 - 10	-
Crimp connection ¹⁾	-	0.75 - 4.0 mm ²	-	AWG 16 - 10	-
Spring force	0.5 - 2.5 mm ² / AWG 20 - 14	-	0.5 - 1.5 mm ² / AWG 20 - 16	0.75 - 1.5 mm ² / AWG 20 - 16	0.75 - 2.5 mm ²

RST20i4/i5/25i5	Solid	Fine-stranded, no cable end sleeve	Fine-stranded, with cable end sleeve	Multi-stranded
Screw connection	0.75 - 4 mm ² / AWG 18 - 12	0.75 - 4 mm ²	0.75 - 2.5 mm ²	0.75 - 4 mm ² / AWG 18 - 12
Crimp connection ¹⁾	-	0.75 - 4 mm ²	-	AWG 18 - 12

RST20i6/i7	Solid	Fine-stranded, no cable end sleeve ²⁾	Fine-stranded, with cable end sleeve	Multi-stranded
Screw connection	Connectors 0.2 - 1.5 mm ² Device connector 0.2 - 2.5 mm ²	0.2 - 2.5 mm ²	0.2 - 1.5 mm ²	0.2 - 2.5 mm ² / AWG 20 - 14
Crimp connection ¹⁾	-	0.2 - 2.5 mm ²	-	-



RST® terminals with screw clamping allow the connection of conductors without special preparation according to EN 60999-1.

1) Crimp contacts must always be ordered separately to the connector. The range of crimp contacts can be found in RST® CLASSIC accessories.

RST20i7/i6:

- 2) Restriction of the connection section range for fine-stranded cables, when using connectors with the following strain reliefs.
- Double connection: 0.2 - 0.75 mm²
 - straight, for cables Ø 6 - 10 mm and Ø 10 - 14 mm: 0.2 - 1.5 mm²

For spring forces, please use the following cable end sleeves. These can be found in RST® CLASSIC accessories.

Conductor cross-section	Ferrule
0.5 mm ²	DIN 46228-E0.5-10
0.75 mm ² / AWG 20	DIN 46228-E0.75-12
1 mm ² / AWG 18	DIN 46228-E1.0-12
1.5 mm ² / AWG 16	DIN 46228-E1.5-12

Maximum conductor cross-section when using two flexible conductors on one clamping point for the connector variant double connection with screw connection (ATEX parts excluded):

Number of poles	max. cross-section
2	2.5 mm ²
3	2.5 mm ²
4	1.5 mm ²
5	1.5 mm ²
6	0.75 mm ²
7	0.75 mm ²

Connectable conductor cross-sections ATEX variants

RST20i2/i3	Solid	Fine-stranded, no cable end sleeve	Fine-stranded, with cable end sleeve	Fine-stranded, ultrason. welded
Screw connection	1.5 - 4 mm ²	1.5 - 4 mm ²	1.5 - 2.5 mm ²	-
Spring force	1.5 - 2.5 mm ²	-	1.5 mm ²	1.5 - 2.5 mm ²


RST20i4/i5	Solid	Fine-stranded, no cable end sleeve	Fine-stranded, with cable end sleeve
Screw connection	1.5 - 2.5 mm ²	1.5 - 2.5 mm ²	1.5 - 2.5 mm ²



RST® CLASSIC CABLE PREPARATION

Sheath strip and wire strip lengths

RST20i2/i3/25i3		straight Ø 6 - 10 mm, Ø 8 - 12 mm, Ø 10 - 14 mm		straight Ø 13 - 18 mm		square Ø 6 - 10 mm, Ø 8 - 12 mm, Ø 10 - 14 mm		splitter connector Ø 6 - 10 mm, Ø 8 - 12 mm, Ø 10 - 14 mm		
Conductor	x	y (PE)	y	y (PE)	y	y (PE)	y	2-pole y	3-pole y (PE)	y
Screw connection	8 mm	31.5 mm	26.5 mm	42 mm	37 mm	31.5 mm	26.5 mm	42 mm	45.5 mm	40.5 mm
Spring connection										
solid	14 mm	40 mm	35 mm	–	–	40 mm	35 mm	–	55 mm	50 mm
fine stranded with AE	13 mm									
Crimp connection	8 mm	42 mm	37 mm	57 mm	52 mm	42 mm	37 mm	–	–	–
RST20i4/i5/25i5		straight Ø 6 - 10 mm, Ø 10 - 14 mm		straight Ø 13 - 18 mm		square Ø 6 - 10 mm, Ø 10 - 14 mm		splitter connector Ø 6 - 10 mm, Ø 13 - 18 mm		
Conductor	x	y (PE)	y	y (PE)	y	y (PE)	y	y (PE)	y	
Screw connection	8 mm	31.5 mm	26.5 mm	42 mm	37 mm	31.5 mm	26.5 mm	45.5 mm	40.5 mm	
Crimp connection	8 mm	42 mm	37 mm	49 mm	44 mm	42 mm	37 mm	–	–	
RST20i6/i7		straight Ø 6 - 10 mm, Ø 10 - 14 mm		straight Ø 13 - 18 mm		square Ø 6 - 10 mm, Ø 10 - 14 mm		splitter connector Ø 6 - 10 mm, Ø 13 - 18 mm		
Conductor	x	y (PE)	y	y (PE)	y	y (PE)	y	y (PE)	y	
Screw connection	8 mm	30 mm	25 mm	42 mm	37 mm	30 mm	25 mm	45 mm	40 mm	
Crimp connection	7 mm	37 mm	32 mm	44 mm	39 mm	37 mm	32 mm	–	–	

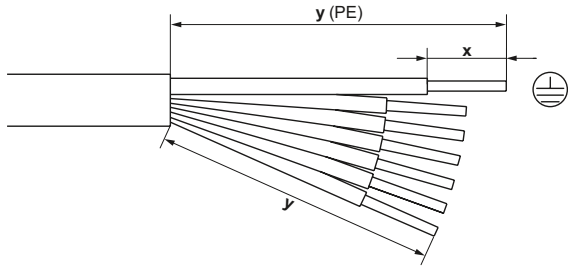

RST® CLASSIC MATERIAL RESISTANCE

Medium	Plug connectors, device connectors & distributors
Alcohols	✓
Ammoniumchlorid (Salmjak)	✓
Ammonium sulfate 10 %	✓
Citric acid, aqueous, 10%	✓
Fruit juices, fruit acids	✓
Glycerin	✓
Potassium chloride	✓
Common salt, (sodium chloride) aqueous, 10%	✓
Nickel chloride (II) saturated	✓
Mercury pure	✓
Sulfur hexafluoride	✓
Water (sea water, salt water)	✓


We use the thermoplastic material polyamide for our products. The table above shows an extract of substances and the resistance of polyamide at room temperature approx. 20 °C. Contact our customer service to have the material resistance to the substances confirmed or if you have other substances in use that are not included in this list.



RST[®] CLASSIC DERATING CURVES


RST20i3 (Screw connection - spring force)

Derating curve to IEC 61984 Edition 2 dated 10/2008 Sec. 7.3.8

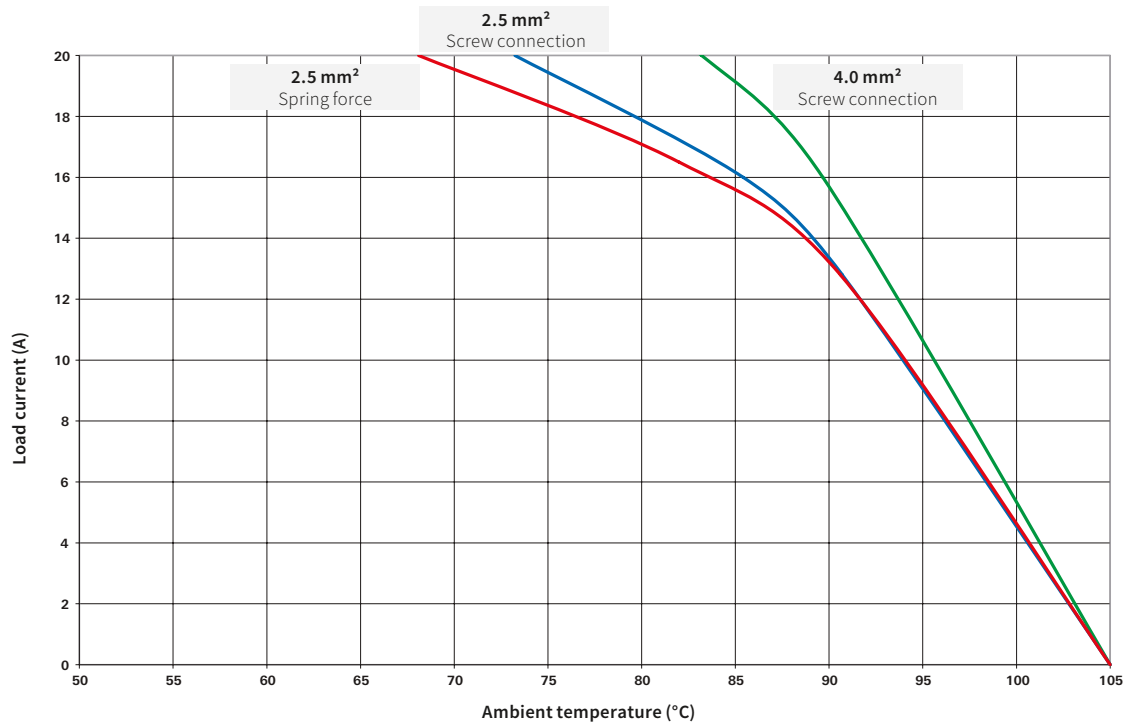

RST25i3 (screw connection)


Derating curve to IEC 61984 Edition 2 dated 10/2008 Sec. 7.3.8

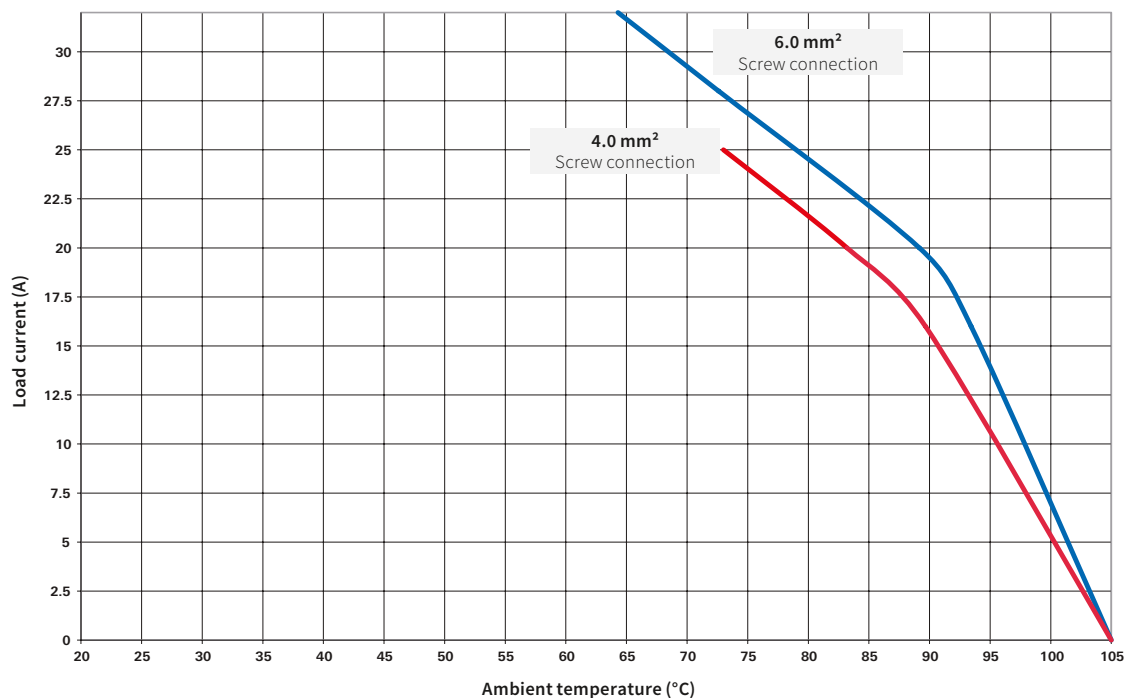

RST® CLASSIC DERATING CURVES


RST20i5 (screw connection – crimp connection)

Derating curve to IEC 61984 Edition 2 dated 10/2008 Sec. 7.3.8

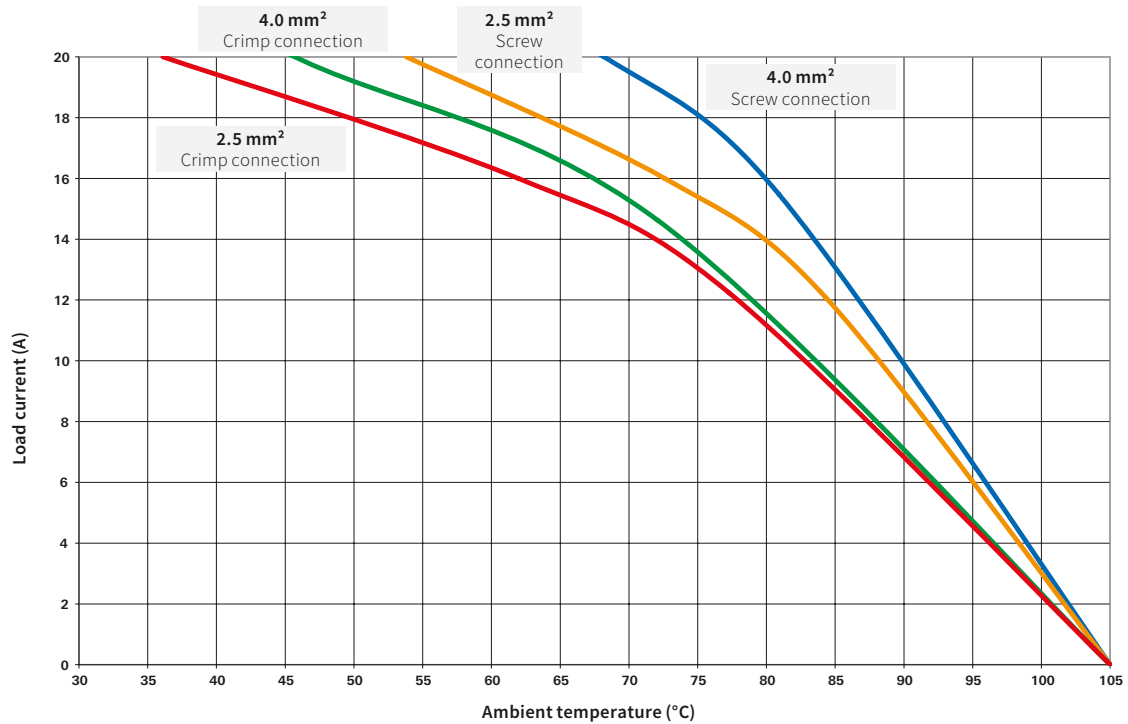

RST25i5 (screw connection)


Derating curve to IEC 61984 Edition 2 dated 10/2008 Sec. 7.3.8

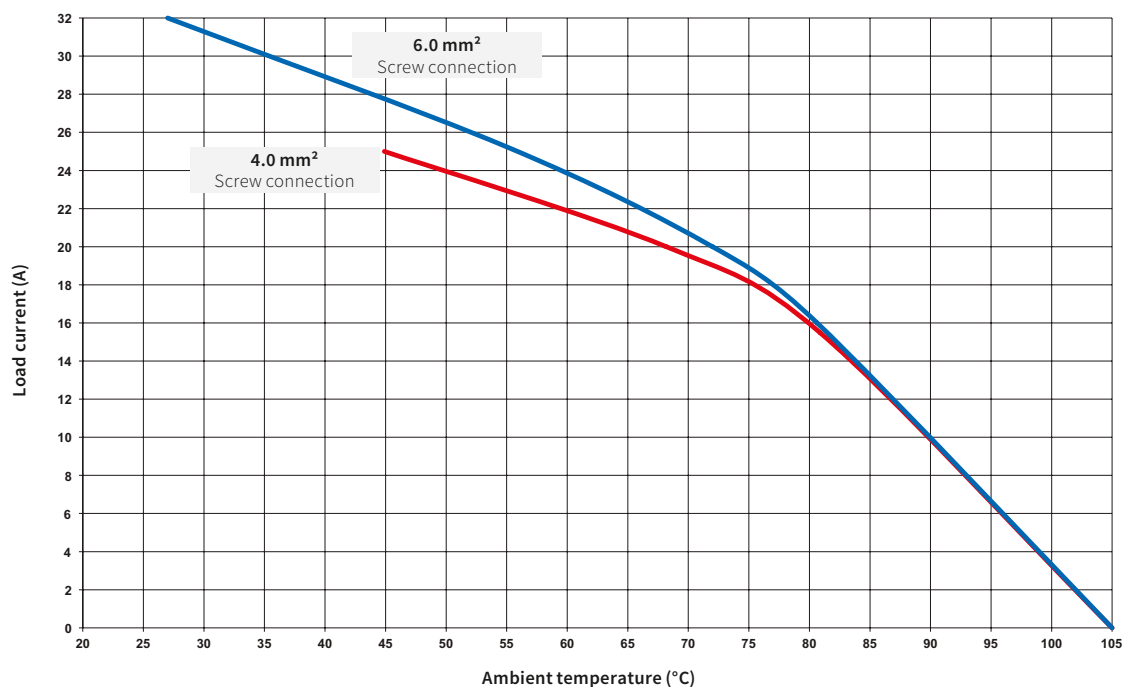


RST® CLASSIC ASSEMBLY INSTRUCTION

CABLE ASSEMBLY


Screw connection

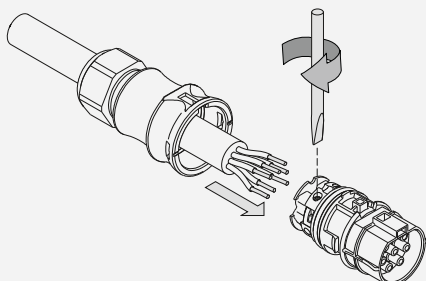

Spring force

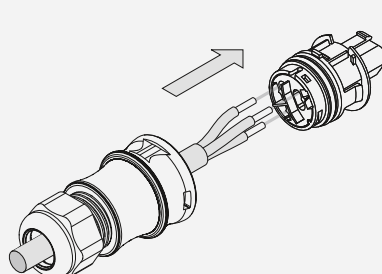


Crimp connection

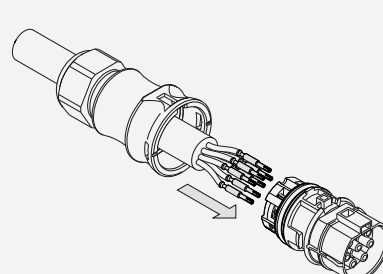


Number of poles	Torque	Screwdriver
RST20i2/i3	0.8 - 1 Nm	PZ1
RST20i4/i5	0.5 - 0.7 Nm	PZ1
RST20i6/i7	Type 0.5 Nm	DIN 5264 A, deburred 0.8 × 3.0 mm or 6-Lobe SL6 ("TORX" TX6)

CLOSING THE CONNECTOR

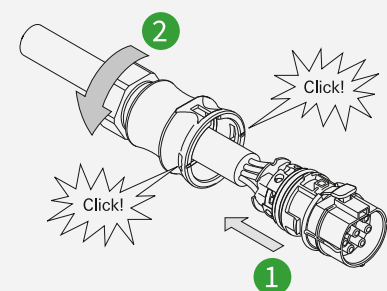


Tightening torque
typ. 4+1 Nm

OPTIONAL: USE THE MANUAL UNLOCKING FUNCTION

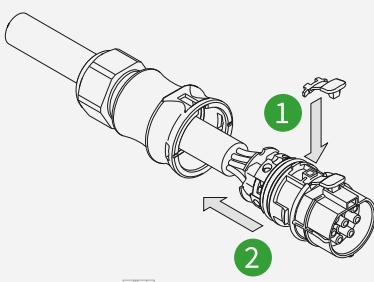


Manual
unlocking seat

INSERT AND LOCK

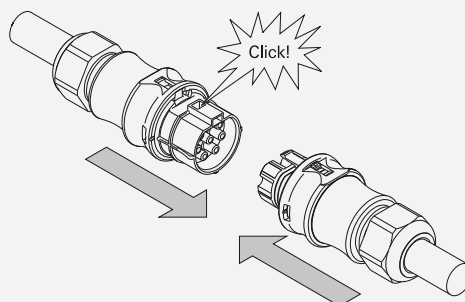


DEVICE CONNECTOR


Modular with M16, M20, M25 cable feed through

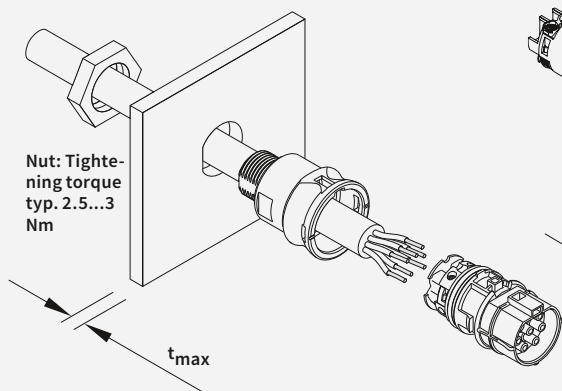

One-piece with M25 cable feed through

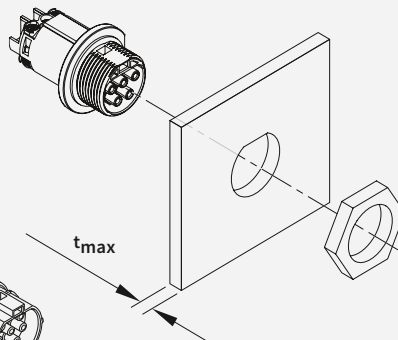


Dimension drawing of the opening for housing installation when anti-twist protection is required




	D (mm)	d (mm)	tmax (mm)
M16	16.4 ^{-0.2}	15.0 ^{-0.2}	8
M20	20.4 ^{-0.2}	19.0 ^{-0.2}	8
M25	25.4 ^{-0.2}	23.9 ^{-0.2}	8
M32	32.5 ^{-0.2}	30.75 ^{-0.2}	7

RST® CLASSIC ASSEMBLY INSTRUCTION

UNLOCK AND DISCONNECT

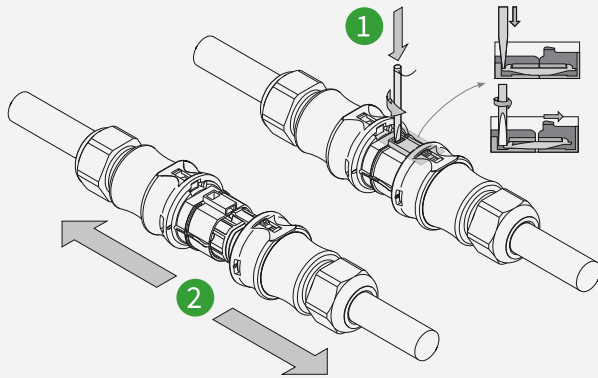


OPENING THE CONNECTOR

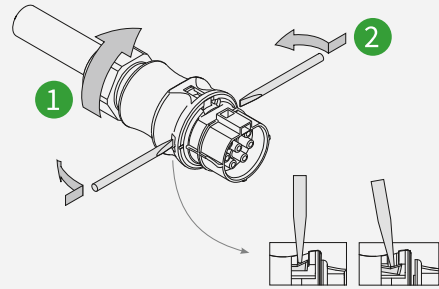


CABLE REMOVAL


Screw connection

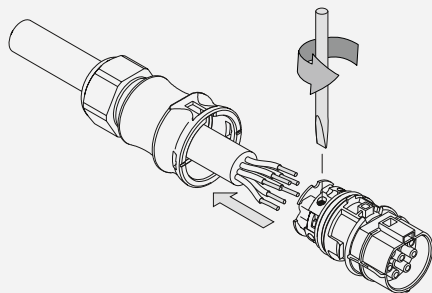

Spring force

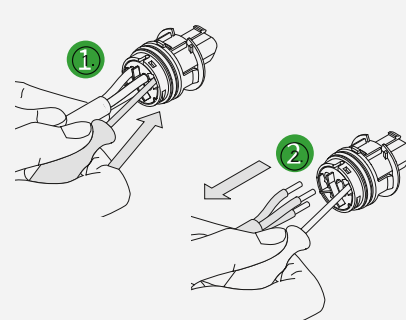

Crimp connection

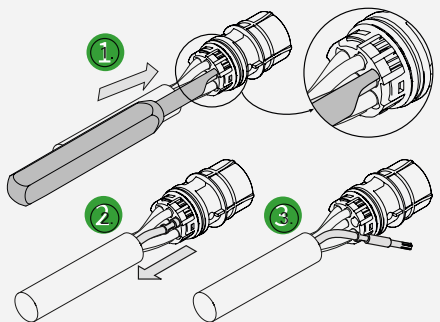

i Proceed in the same way for 2 to 7-pole connectors.
Observe the pole configuration.

NOTE: Please note that electrical connections and installations must be carried out only by appropriately trained specialists.

The Assembly instructions accompanying the product must be observed! The relevant Assembly instruction can be found online in the download area of the product concerned: eshop.wieland-electric.com



RST® POWER TECHNICAL DATA

	RST50i4/i5
Rated voltage	250/400 V
Rated current	50 A
Number of poles	4 and 5-pole
Connectable cable diameter*	15 - 25 mm; 20 - 32 mm
Material	Contact parts: Brass, surface-treated housing parts: Polyamide, halogen-free, V2 Sealing material NBR, TPE
Pollution degree	3 (when connected)
Protection rating	IP66/67/69
IK code	IK07 (2 joules)
Certificates / approvals	VDE, c CSA us



*Other diameters on request

RST® POWER DIMENSIONS



RST50i4/i5

CONNECTORS

female

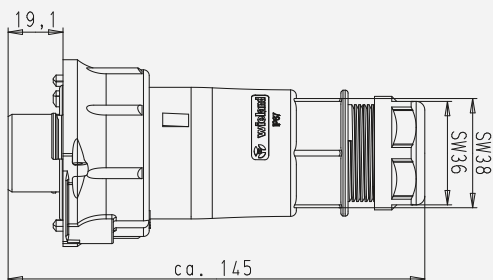



male

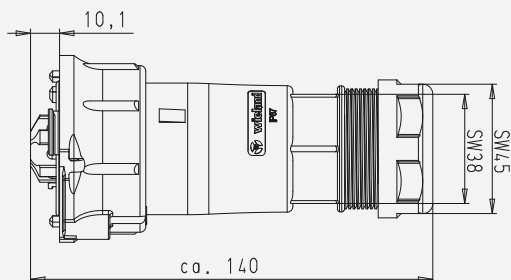



DEVICE CONNECTOR

female



male



NOTE:

The drawing for your product can be found in the download area of the relevant Art.No. at eshop.wieland-electric.com



RST® POWER CABLE PREPARATION

Connectable conductor cross-sections

Model	Solid		Fine-stranded		Multi-stranded	
	Connectors	Device connector	Connectors	Device connector	Connectors	Device connector
Screw connection	4.0 - 6.0 mm ² *	4.0 - 16.0 mm ²	4.0 - 16.0 mm ²	4.0 - 16.0 mm ²	4.0 - 6.0 mm ² *	4.0 - 16.0 mm ²
Crimp connection	-	-	4.0 - 10.0 mm ²	4.0 - 10.0 mm ²	-	-

* Solid and multi-wired conductors > 6.0 mm² cannot be connected in the existing installation space due to their stiffness.



RST® terminals with screw clamping allow the connection of conductors without special preparation according to EN 60999-1. Crimp contacts must always be ordered separately to the connector. The range of crimp contacts can be found in RST® POWER accessories.

Sheath strip and wire strip lengths

Conductor		PE	1, 2, 3, N, PE
Sheath strip length	Screw connection	80 mm	70 mm
	Crimp connection	80 mm	70 mm
Wire strip length	Screw connection	10 mm	10 mm
	Crimp connection	11 mm	11 mm

RST® POWER MATERIAL RESISTANCE

Medium	Plug connectors & device connectors
Ammonium chloride (Salmjak)	✓
Citric acid, aqueous, 10%	✓
Common salt, (sodium chloride) aqueous, 10%	✓
Kerosene 100 %	✓
Mercury pure	✓
Sulfur hexafluoride	✓

We use the thermoplastic material polyamide for our products. The table above shows an extract of substances and the resistance of polyamide at room temperature approx. 20 °C. Contact our customer service to have the material resistance to the substances confirmed or if you have other substances in use that are not included in this list.




RST® POWER ASSEMBLY INSTRUCTION

CABLE ASSEMBLY


1. Pull the housing over the cable
2. Prepare cable (see technical specifications)
3. Insert prepared cable (for screw connections: tighten screws, torque 2 Nm)

Note: Make sure that the cables are firmly fixed in the connections.

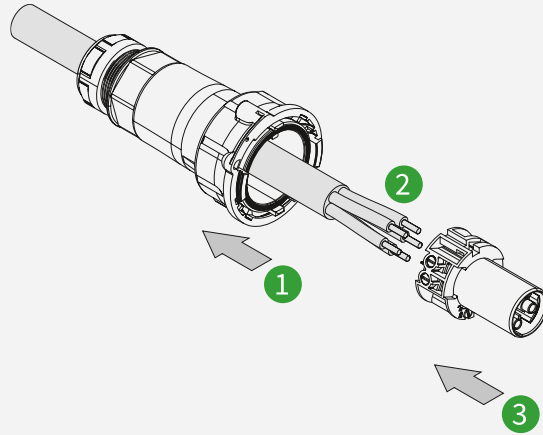

CLOSING THE CONNECTOR

1. Introduce contact insert into housing (observe coding)
2. Turn the contact insert as far as it will go
3. Lock the contact insert
4. Tighten gland nut, torque
 - M32 gland nut: 8 Nm
 - M40 gland nut: 14 Nm


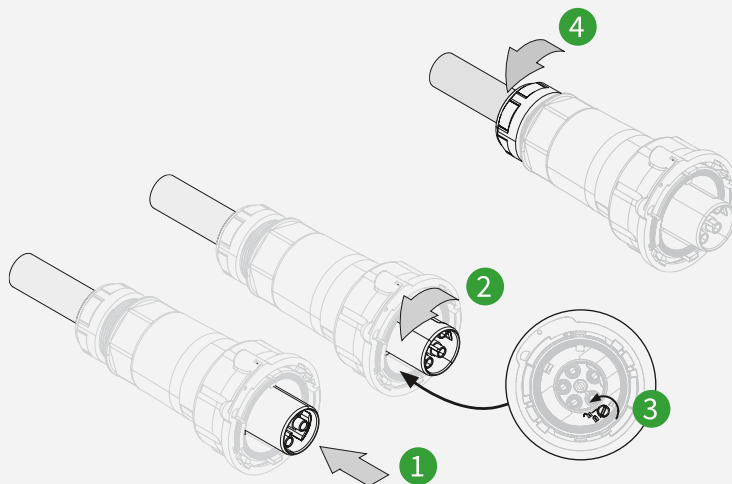


RST® POWER ASSEMBLY INSTRUCTION


DEVICE CONNECTOR

1. Join the parts together
2. Use the adapter ring for M40 bores


i Housing wall thickness: 2 - 7 mm
Surface: smooth and even

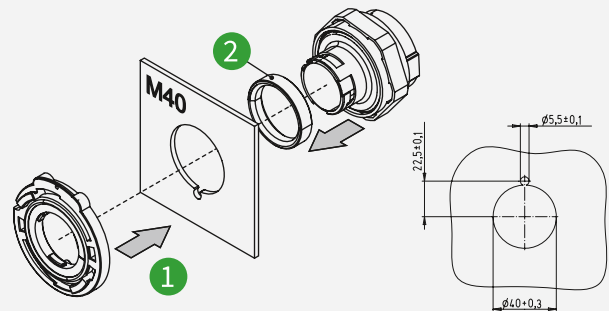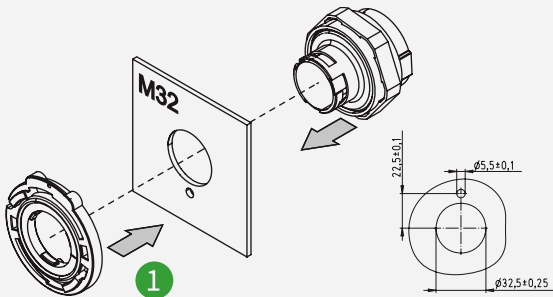


3. Engage bayonet ring, insert fixing pin into corresponding bore
4. Tighten locknut (torque: 2 Nm)



5. Introduce contact insert into device connector housing (observe coding)
6. Turn the contact insert as far as it will go
7. Lock contact insert (connected cable left out for clarity)

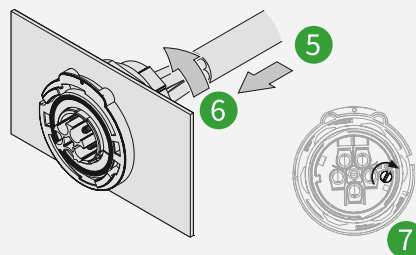


8. Plug in RST® connection
9. Close bayonet

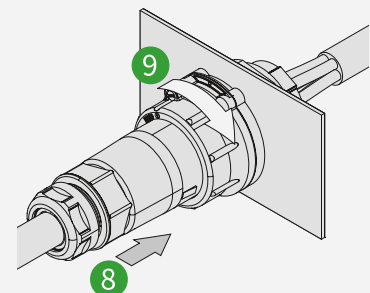


OPTIONS


Fixing pin on flange




Fixing pin on mounting plate

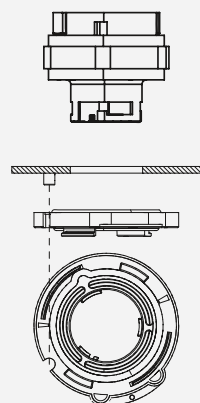

Lock connection



Seal




i Proceed in the same way for 4 and 5-pole connectors.
Observe the pole configuration.

NOTE: Please note that electrical connections and installations must be carried out only by appropriately trained specialists.
The Assembly instructions accompanying the product must be observed! The relevant Assembly instruction BA000641 can be found online in the download area of the product concerned: eshop.wieland-electric.com

RST® DISTRIBUTOR TECHNICAL DATA

	RST® compact and multiple distributors
Rated voltage	250/400 V
Rated current	20 A (25 A)
Temperature range:	-40 °C to +100 °C
Material	Contact parts: Brass, silver-plated Housing parts: thermoplastic PA 66, halogen-free, V2 Sealing material: NBR
Wiring	RST® MINI Standard: 1.5 mm ² , halogen free RST® CLASSIC Standard: 2.5 mm ² , halogen free (other cross-sections on request)
Directives	DIN VDE 0606 T200; DIN EN 61984 (VDE 0627); VDE 0110 IEC 60999
Certificates / approvals	VDE A direct assignment between approval and article number can be found in the eShop at http://eshop.wieland-electric.com , or speak to us.
Protection rating	IP66/68 (3m; 2h)/69 Special variants may offer different degrees of protection.
IK code	IK 07 (2 joules) to DIN EN 62262
Coding	Mechanical coding symbolized through color code. Gray and black with the same mechanical coding. Other codings optional.
Notes	Protection against contact generally guaranteed, even in the unmated condition Yellow/green conductor leading. According to the directive, voltage carrying part must be a female connector. Assembly of ring line with standards-compliant design therefore not possible! Can be connected only when polarity is correct; 1-pole not contactable. Contacts protected to prevent tensile load on the cable. All components can be locked together. In accordance with approval to DIN EN 61535, a lock must be provided. Potentially-hazardous interchangeability with installation connector systems of other manufacturers is not automatically ruled out through compliance with DIN VDE 0606 T200! Installation connector systems are no substitute for national plug/socket systems for domestic use.

RST® DISTRIBUTOR DIMENSIONS

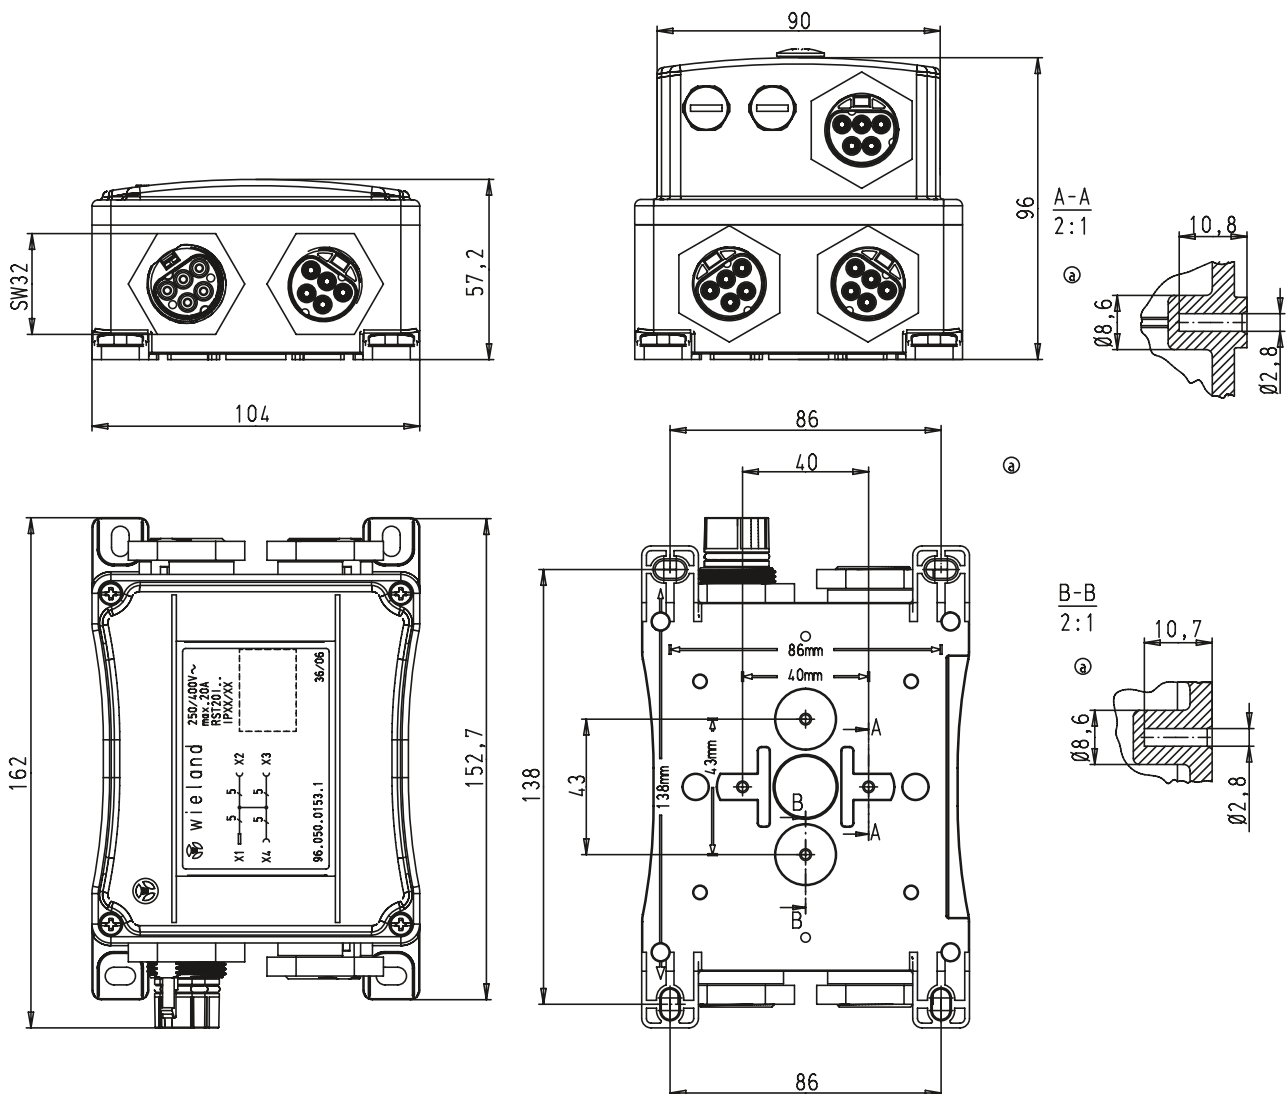

INDEX

PART NUMBER | PAGE

01.006.1553.0	167	4L.042.4041.4	19	4L.427.2533.9	10
01.006.1553.1	167	4L.042.4041.8	19	4L.427.2534.1	11
02.122.9000.0	167	4L.042.4043.9	19	4L.427.2534.9	11
02.122.9100.0	167	4L.042.4053.1	19	4L.427.2537.4	10
02.122.9200.0	167	4L.051.3041.4	20	4L.427.2537.8	10
02.122.9300.0	167	4L.051.3041.4	20	4L.427.2538.4	11
02.125.5521.8	167	4L.051.3043.9	20	4L.427.2538.8	11
02.125.5621.8	167	4L.051.3043.9	20	4L.427.3030.1	9
02.125.5721.8	167	4L.051.3051.8	20	4L.427.3030.9	9
02.125.5821.8	167	4L.051.3051.8	20	4L.427.3032.4	9
02.127.1121.8	167	4L.051.3053.1	20	4L.427.3032.8	9
02.127.1221.8	167	4L.051.3053.1	20	4L.427.3033.1	10
02.127.1321.8	167	4L.051.4041.4	21	4L.427.3033.9	10
4L.020.0141.4	8	4L.051.4043.9	21	4L.427.3034.1	11
4L.020.0143.1	8	4L.051.4051.8	21	4L.427.3034.9	11
4L.020.0143.9	8	4L.051.4053.1	21	4L.427.3037.4	10
4L.020.0241.8	8	4L.052.3041.4	20	4L.427.3037.8	10
4L.020.1141.4	8	4L.052.3041.4	20	4L.427.3038.4	11
4L.020.1143.1	8	4L.052.3043.9	20	4L.427.3038.8	11
4L.020.1143.9	8	4L.052.3043.9	20	4L.427.4030.1	9
4L.020.1241.8	8	4L.052.3051.8	20	4L.427.4030.9	9
4L.021.3041.4	6	4L.052.3051.8	20	4L.427.4032.4	9
4L.021.3041.8	6	4L.052.3053.1	20	4L.427.4032.8	9
4L.021.3043.1	6	4L.052.3053.1	20	4L.427.4033.1	10
4L.021.3043.9	6	4L.052.4041.4	21	4L.427.4033.9	10
4L.021.4041.4	7	4L.052.4043.9	21	4L.427.4034.1	11
4L.021.4041.8	7	4L.052.4051.8	21	4L.427.4034.9	11
4L.021.4043.1	7	4L.052.4053.1	21	4L.427.4037.4	10
4L.021.4043.9	7	4L.427.0530.1	9	4L.427.4037.8	10
4L.022.3041.4	6	4L.427.0530.9	9	4L.427.4038.4	11
4L.022.3041.8	6	4L.427.0532.4	9	4L.427.4038.8	11
4L.022.3043.1	6	4L.427.0532.8	9	4L.437.0530.1	15
4L.022.3043.9	6	4L.427.0533.1	10	4L.437.0532.8	15
4L.022.4041.4	7	4L.427.0533.9	10	4L.437.0533.1	16
4L.022.4041.8	7	4L.427.0534.1	11	4L.437.0534.1	17
4L.022.4043.1	7	4L.427.0534.9	11	4L.437.0537.8	16
4L.022.4043.9	7	4L.427.0537.4	10	4L.437.0538.8	17
4L.030.0141.4	14	4L.427.0537.8	10	4L.437.1030.1	15
4L.030.0143.9	14	4L.427.0538.4	11	4L.437.1032.8	15
4L.030.0153.1	14	4L.427.0538.8	11	4L.437.1033.1	16
4L.030.0351.8	14	4L.427.1030.1	9	4L.437.1034.1	17
4L.030.1141.4	14	4L.427.1030.9	9	4L.437.1037.8	16
4L.030.1143.9	14	4L.427.1032.4	9	4L.437.1038.8	17
4L.030.1153.1	14	4L.427.1032.8	9	4L.437.1530.1	15
4L.030.1351.8	14	4L.427.1033.1	10	4L.437.1532.8	15
4L.031.3041.4	12	4L.427.1033.9	10	4L.437.1533.1	16
4L.031.3043.9	12	4L.427.1034.1	11	4L.437.1534.1	17
4L.031.3051.8	12	4L.427.1034.9	11	4L.437.1537.8	16
4L.031.3053.1	12	4L.427.1037.4	10	4L.437.1538.8	17
4L.031.4041.4	13	4L.427.1037.8	10	4L.437.2030.1	15
4L.031.4043.9	13	4L.427.1038.4	11	4L.437.2032.8	15
4L.031.4051.8	13	4L.427.1038.8	11	4L.437.2033.1	16
4L.031.4053.1	13	4L.427.1530.1	9	4L.437.2034.1	17
4L.032.3041.4	12	4L.427.1530.9	9	4L.437.2037.8	16
4L.032.3043.9	12	4L.427.1532.4	9	4L.437.2038.8	17
4L.032.3051.8	12	4L.427.1532.8	9	4L.437.2530.1	15
4L.032.3053.1	12	4L.427.1533.1	10	4L.437.2532.8	15
4L.032.4041.4	13	4L.427.1533.9	10	4L.437.2533.1	16
4L.032.4043.9	13	4L.427.1534.1	11	4L.437.2534.1	17
4L.032.4051.8	13	4L.427.1534.9	11	4L.437.2537.8	16
4L.032.4053.1	13	4L.427.1537.4	10	4L.437.2538.8	17
4L.041.3041.4	18	4L.427.1537.8	10	4L.437.3030.1	15
4L.041.3041.8	18	4L.427.1538.4	11	4L.437.3032.8	15
4L.041.3043.9	18	4L.427.1538.8	11	4L.437.3033.1	16
4L.041.3053.1	18	4L.427.2030.1	9	4L.437.3034.1	17
4L.041.3141.4	18	4L.427.2030.9	9	4L.437.3037.8	16
4L.041.3141.8	18	4L.427.2032.4	9	4L.437.3038.8	17
4L.041.3143.9	18	4L.427.2032.8	9	4L.437.4030.1	15
4L.041.3153.1	18	4L.427.2033.1	10	4L.437.4032.8	15
4L.041.4041.4	19	4L.427.2033.9	10	4L.437.4033.1	16
4L.041.4041.8	19	4L.427.2034.1	11	4L.437.4034.1	17
4L.041.4043.9	19	4L.427.2034.9	11	4L.437.4037.8	16
4L.041.4053.1	19	4L.427.2037.4	10	4L.437.4038.8	17
4L.042.3041.4	18	4L.427.2037.8	10	05.502.2100.0	168
4L.042.3041.8	18	4L.427.2038.4	11	05.502.3500.0	168
4L.042.3043.9	18	4L.427.2038.8	11	05.502.3600.0	168
4L.042.3053.1	18	4L.427.2530.1	9	05.502.4000.0	169
4L.042.3141.4	18	4L.427.2530.9	9	05.544.7800.0	167
4L.042.3141.8	18	4L.427.2532.4	9	05.544.7900.0	167
4L.042.3143.9	18	4L.427.2532.8	9	05.544.8000.0	167
4L.042.3153.1	18	4L.427.2533.1	10	05.545.0021.8	167

INDEX

PART NUMBER | PAGE

05.545.0121.8	167	9L.071.4553.6	139	9L.171.2153.6	143
05.545.0221.8	167	9L.071.4553.9	139	9L.171.2153.9	143
05.545.0321.8	167	9L.071.4853.0	138	9L.171.2253.0	147
05.545.4600.0	167	9L.071.4853.1	138	9L.171.2253.1	147
05.546.3921.8	167	9L.071.4853.6	138	9L.171.2253.6	147
05.546.4021.8	167	9L.071.4853.9	138	9L.171.2253.9	147
05.546.4121.8	167	9L.071.6053.0	145	9L.171.2353.1	149
05.564.4453.0	164	9L.071.6053.1	145	9L.171.2353.6	149
05.564.4453.1	164	9L.071.6053.6	145	9L.171.2353.9	149
05.564.8653.1	166	9L.071.6053.9	145	9L.172.2053.0	145
05.564.8653.3	166	9L.071.6153.0	143	9L.172.2053.1	145
05.564.8653.7	166	9L.071.6153.1	143	9L.172.2053.6	145
05.565.0400.0	166	9L.071.6153.6	143	9L.172.2053.9	145
05.565.0500.0	166	9L.071.6153.9	143	9L.172.2153.0	143
05.565.2600.0	166	9L.071.6253.0	147	9L.172.2153.1	143
05.565.8653.1	166	9L.071.6253.1	147	9L.172.2153.6	143
05.565.8653.3	166	9L.071.6253.6	147	9L.172.2153.9	143
05.565.8653.7	166	9L.071.6253.9	147	9L.172.2253.0	147
05.565.9953.0	165	9L.071.6353.1	149	9L.172.2253.1	147
05.565.9953.1	165	9L.071.6353.6	149	9L.172.2253.6	147
05.566.5253.0	169	9L.071.6353.9	149	9L.172.2253.9	147
05.566.5253.1	169	9L.072.4153.1	139	9L.172.2353.1	149
05.568.8853.1	169	9L.072.6053.0	145	9L.172.2353.6	149
05.583.2900.1	166	9L.072.6053.1	145	9L.172.2353.9	149
05.583.2900.3	166	9L.072.6053.6	145	9L.173.0053.0	142
06.502.4300.0	168	9L.072.6053.9	145	9L.173.0053.1	142
06.502.6100.0	22	9L.072.6153.0	143	9L.173.0053.6	142
06.502.6300.0	22	9L.072.6153.1	143	9L.173.0053.9	142
06.561.8383.0	59	9L.072.6153.6	143	9L.173.0153.0	142
06.562.0583.0	59	9L.072.6153.9	143	9L.173.0153.1	142
06.562.5853.0	59	9L.072.6253.0	147	9L.173.0153.6	142
06.562.5853.1	59	9L.072.6253.1	147	9L.173.0153.9	142
06.562.8753.0	166	9L.072.6253.6	147	41.021.3041.4	6
06.563.5053.1	22	9L.072.6253.9	147	41.021.3041.8	6
06.563.5153.1	22	9L.072.6353.1	149	41.021.3043.1	6
06.563.8653.0	58	9L.072.6353.6	149	41.021.3043.9	6
06.563.8653.1	58	9L.072.6353.9	149	41.021.4041.4	7
06.563.8753.0	58	9L.073.4053.0	139	41.021.4041.8	7
06.563.8753.1	58	9L.073.4053.1	139	41.021.4043.1	7
06.563.8853.0	58	9L.073.4053.6	139	41.021.4043.9	7
06.563.8853.1	58	9L.073.4053.9	139	41.022.3041.4	6
06.563.8953.0	58	9L.073.4153.0	140	41.022.3041.8	6
06.563.8953.1	58	9L.073.4153.1	140	41.022.3043.1	6
06.563.9053.0	58	9L.073.4153.6	140	41.022.3043.9	6
06.563.9053.1	58	9L.073.4153.9	140	41.022.4041.4	7
06.563.9153.0	58	9L.161.0053.0	129	41.022.4041.8	7
06.563.9153.1	58	9L.161.0153.6	129	41.022.4043.1	7
06.563.9253.0	59	9L.161.0553.6	130	41.022.4043.9	7
06.563.9253.1	59	9L.161.0853.6	129	41.031.3041.4	12
06.563.9353.0	58	9L.161.2053.6	133	41.031.3043.9	12
06.563.9353.1	58	9L.161.2153.6	131	41.031.3051.8	12
06.564.1553.1	22	9L.161.2253.6	135	41.031.3053.1	12
06.564.1653.1	22	9L.161.2353.6	137	41.031.4041.4	13
06.600.3627.0	168	9L.162.2053.6	133	41.031.4043.9	13
06.600.3727.0	168	9L.162.2153.6	131	41.031.4051.8	13
06.600.3827.0	168	9L.162.2253.6	135	41.031.4053.1	13
06.600.3927.0	168	9L.162.2353.6	137	41.032.3041.4	12
9L.061.4053.6	126	9L.163.0053.6	130	41.032.3043.9	12
9L.061.4153.6	127	9L.163.0153.6	130	41.032.3051.8	12
9L.061.4553.6	127	9L.171.0053.0	141	41.032.3053.1	12
9L.061.4853.6	126	9L.171.0053.1	141	41.032.4041.4	13
9L.061.6053.6	133	9L.171.0053.6	141	41.032.4043.9	13
9L.061.6153.6	131	9L.171.0053.9	141	41.032.4051.8	13
9L.061.6253.6	135	9L.171.0153.0	141	41.032.4053.1	13
9L.061.6353.6	137	9L.171.0153.1	141	41.041.3041.4	18
9L.062.6053.6	133	9L.171.0153.6	141	41.041.3041.8	18
9L.062.6153.6	131	9L.171.0153.9	141	41.041.3043.9	18
9L.062.6253.6	135	9L.171.0553.0	142	41.041.3053.1	18
9L.062.6353.6	137	9L.171.0553.1	142	41.041.3141.4	18
9L.063.4053.6	127	9L.171.0553.6	142	41.041.3141.8	18
9L.063.4153.6	128	9L.171.0553.9	142	41.041.3143.9	18
9L.071.4053.0	138	9L.171.0853.0	141	41.041.3153.1	18
9L.071.4053.1	138	9L.171.0853.1	141	41.041.4041.4	19
9L.071.4053.6	138	9L.171.0853.6	141	41.041.4041.8	19
9L.071.4053.9	138	9L.171.0853.9	141	41.041.4043.9	19
9L.071.4153.0	139	9L.171.2053.0	145	41.041.4053.1	19
9L.071.4153.1	139	9L.171.2053.1	145	41.042.3041.4	18
9L.071.4153.6	139	9L.171.2053.6	145	41.042.3041.8	18
9L.071.4153.9	139	9L.171.2053.9	145	41.042.3043.9	18
9L.071.4553.0	139	9L.171.2153.0	143	41.042.3053.1	18
9L.071.4553.1	139	9L.171.2153.1	143	41.042.3141.4	18



INDEX

PART NUMBER | PAGE

41.042.3141.8	18	41.427.2532.4	9	46.030.0153.9	37
41.042.3143.9	18	41.427.2532.8	9	46.030.0154.0	29
41.042.3153.1	18	41.427.2533.1	10	46.030.0154.1	29
41.042.4041.4	19	41.427.2533.9	10	46.030.0154.9	29
41.042.4041.8	19	41.427.2534.1	11	46.030.0155.7	37
41.042.4043.9	19	41.427.2534.9	11	46.030.1250.4	37
41.042.4053.1	19	41.427.2537.4	10	46.030.1250.6	37
41.051.3041.4	20	41.427.2537.8	10	46.030.1251.4	29
41.051.3041.4	20	41.427.2538.4	11	46.030.1251.6	29
41.051.3043.9	20	41.427.2538.8	11	46.030.1253.0	37
41.051.3043.9	20	41.427.3030.1	9	46.030.1253.1	37
41.051.3051.8	20	41.427.3030.9	9	46.030.1253.9	37
41.051.3051.8	20	41.427.3032.4	9	46.030.1254.0	29
41.051.3053.1	20	41.427.3032.8	9	46.030.1254.1	29
41.051.3053.1	20	41.427.3033.1	10	46.030.1254.9	29
41.051.4041.4	21	41.427.3033.9	10	46.030.1255.7	37
41.051.4043.9	21	41.427.3034.1	11	46.030.1354.4	29
41.051.4051.8	21	41.427.3034.9	11	46.030.1354.7	29
41.051.4053.1	21	41.427.3037.4	10	46.030.1355.4	37
41.052.3041.4	20	41.427.3037.8	10	46.030.1355.7	37
41.052.3041.4	20	41.427.3038.4	11	46.031.4450.4	34
41.052.3043.9	20	41.427.3038.8	11	46.031.4450.6	34
41.052.3043.9	20	41.427.4030.1	9	46.031.4451.4	26
41.052.3051.8	20	41.427.4030.9	9	46.031.4451.6	26
41.052.3051.8	20	41.427.4032.4	9	46.031.4453.0	34
41.052.3053.1	20	41.427.4032.8	9	46.031.4453.1	34
41.052.3053.1	20	41.427.4033.1	10	46.031.4453.9	34
41.052.4041.4	21	41.427.4033.9	10	46.031.4454.0	26
41.052.4043.9	21	41.427.4034.1	11	46.031.4454.1	26
41.052.4051.8	21	41.427.4034.9	11	46.031.4454.9	26
41.052.4053.1	21	41.427.4037.4	10	46.031.4455.7	34
41.427.0530.1	9	41.427.4037.8	10	46.031.4456.7	26
41.427.0530.9	9	41.427.4038.4	11	46.031.4550.4	34
41.427.0532.4	9	41.427.4038.8	11	46.031.4550.6	34
41.427.0532.8	9	41.437.0530.1	15	46.031.4551.4	26
41.427.0533.1	10	41.437.0532.8	15	46.031.4551.6	26
41.427.0533.9	10	41.437.0533.1	16	46.031.4553.0	34
41.427.0534.1	11	41.437.0534.1	17	46.031.4553.1	34
41.427.0534.9	11	41.437.0537.8	16	46.031.4553.9	34
41.427.0537.4	10	41.437.0538.8	17	46.031.4554.0	26
41.427.0537.8	10	41.437.1030.1	15	46.031.4554.1	26
41.427.0538.4	11	41.437.1032.8	15	46.031.4554.9	26
41.427.0538.8	11	41.437.1033.1	16	46.031.4555.7	34
41.427.1030.1	9	41.437.1034.1	17	46.031.4556.7	26
41.427.1030.9	9	41.437.1037.8	16	46.031.4951.4	26
41.427.1032.4	9	41.437.1038.8	17	46.031.4951.6	26
41.427.1032.8	9	41.437.1530.1	15	46.031.5050.4	35
41.427.1033.1	10	41.437.1532.8	15	46.031.5050.6	35
41.427.1033.9	10	41.437.1533.1	16	46.031.5051.4	27
41.427.1034.1	11	41.437.1534.1	17	46.031.5051.6	27
41.427.1034.9	11	41.437.1537.8	16	46.031.5053.0	35
41.427.1037.4	10	41.437.1538.8	17	46.031.5053.1	35
41.427.1037.8	10	41.437.2030.1	15	46.031.5053.9	35
41.427.1038.4	11	41.437.2032.8	15	46.031.5054.0	27
41.427.1038.8	11	41.437.2033.1	16	46.031.5054.1	27
41.427.1530.1	9	41.437.2034.1	17	46.031.5054.9	27
41.427.1530.9	9	41.437.2037.8	16	46.031.5055.7	35
41.427.1532.4	9	41.437.2038.8	17	46.031.5056.7	27
41.427.1532.8	9	41.437.2530.1	15	46.031.M0L0.0	36
41.427.1533.1	10	41.437.2532.8	15	46.031.M0L0.1	36
41.427.1533.9	10	41.437.2533.1	16	46.031.M0L0.4	36
41.427.1534.1	11	41.437.2534.1	17	46.031.M0L0.6	36
41.427.1534.9	11	41.437.2537.8	16	46.031.M0L0.7	36
41.427.1537.4	10	41.437.2538.8	17	46.031.M0L0.9	36
41.427.1537.8	10	41.437.3030.1	15	46.031.M0L1.0	28
41.427.1538.4	11	41.437.3032.8	15	46.031.M0L1.1	28
41.427.1538.8	11	41.437.3033.1	16	46.031.M0L1.4	28
41.427.2030.1	9	41.437.3034.1	17	46.031.M0L1.6	28
41.427.2030.9	9	41.437.3037.8	16	46.031.M0L1.9	28
41.427.2032.4	9	41.437.3038.8	17	46.031.M0S0.4	36
41.427.2032.8	9	41.437.4030.1	15	46.031.M0S0.6	36
41.427.2033.1	10	41.437.4032.8	15	46.031.M0S1.4	28
41.427.2033.9	10	41.437.4033.1	16	46.031.M0S1.6	28
41.427.2034.1	11	41.437.4034.1	17	46.031.M0S3.0	36
41.427.2034.9	11	41.437.4037.8	16	46.031.M0S3.1	36
41.427.2037.4	10	41.437.4038.8	17	46.031.M0S3.9	36
41.427.2037.8	10	46.030.0150.6	37	46.031.M0S4.0	28
41.427.2038.4	11	46.030.0151.4	29	46.031.M0S4.1	28
41.427.2038.8	11	46.030.0151.6	29	46.031.M0S4.9	28
41.427.2530.1	9	46.030.0153.0	37	46.031.M0S5.7	36
41.427.2530.9	9	46.030.0153.1	37	46.032.4450.4	34

INDEX

PART NUMBER | PAGE

46.032.4450.6	34	46.051.4553.1	48	46.422.1037.4	30
46.032.4451.4	26	46.051.4553.6	48	46.422.1038.4	31
46.032.4451.6	26	46.051.4553.9	48	46.422.2000.1	30
46.032.4453.0	34	46.051.4554.0	44	46.422.2002.4	30
46.032.4453.1	34	46.051.4554.1	44	46.422.2003.1	30
46.032.4453.9	34	46.051.5050.4	50	46.422.2004.1	31
46.032.4454.0	26	46.051.5051.4	46	46.422.2007.4	30
46.032.4454.1	26	46.051.5053.0	50	46.422.2008.4	31
46.032.4454.9	26	46.051.5053.1	50	46.422.2030.1	30
46.032.4455.7	34	46.051.5053.6	50	46.422.2032.4	30
46.032.4456.7	26	46.051.5053.9	50	46.422.2033.1	30
46.032.4550.4	34	46.051.5054.0	46	46.422.2034.1	31
46.032.4550.6	34	46.051.5054.1	46	46.422.2037.4	30
46.032.4551.4	26	46.051.M0L0.0	49	46.422.2038.4	31
46.032.4551.6	26	46.051.M0L0.1	49	46.422.3000.1	30
46.032.4553.0	34	46.051.M0L0.4	49	46.422.3002.4	30
46.032.4553.1	34	46.051.M0L0.6	49	46.422.3003.1	30
46.032.4553.9	34	46.051.M0L0.9	49	46.422.3004.1	31
46.032.4554.0	26	46.051.M0L1.0	45	46.422.3007.4	30
46.032.4554.1	26	46.051.M0L1.1	45	46.422.3008.4	31
46.032.4554.9	26	46.051.M0L1.4	45	46.422.3030.1	30
46.032.4555.7	34	46.051.M050.4	49	46.422.3032.4	30
46.032.4556.7	26	46.051.M051.4	45	46.422.3033.1	30
46.032.4951.4	26	46.051.M053.0	49	46.422.3034.1	31
46.032.4951.6	26	46.051.M053.1	49	46.422.3037.4	30
46.032.5050.4	35	46.051.M053.6	49	46.422.3038.4	31
46.032.5050.6	35	46.051.M053.9	49	46.422.4000.1	30
46.032.5051.4	27	46.051.M054.0	45	46.422.4002.4	30
46.032.5051.6	27	46.051.M054.1	45	46.422.4003.1	30
46.032.5053.0	35	46.052.4150.4	48	46.422.4004.1	31
46.032.5053.1	35	46.052.4151.4	44	46.422.4007.4	30
46.032.5053.9	35	46.052.4153.0	48	46.422.4008.4	31
46.032.5054.0	27	46.052.4153.1	48	46.422.4030.1	30
46.032.5054.1	27	46.052.4153.6	48	46.422.4032.4	30
46.032.5054.9	27	46.052.4153.9	48	46.422.4033.1	30
46.032.5055.7	35	46.052.4154.0	44	46.422.4034.1	31
46.032.5056.7	27	46.052.4154.1	44	46.422.4037.4	30
46.032.M0L0.0	36	46.052.4550.4	48	46.422.4038.4	31
46.032.M0L0.1	36	46.052.4551.4	44	46.422.5000.1	30
46.032.M0L0.4	36	46.052.4553.0	48	46.422.5002.4	30
46.032.M0L0.6	36	46.052.4553.1	48	46.422.5003.1	30
46.032.M0L0.7	36	46.052.4553.6	48	46.422.5004.1	31
46.032.M0L0.9	36	46.052.4553.9	48	46.422.5007.4	30
46.032.M0L1.0	28	46.052.4554.0	44	46.422.5008.4	31
46.032.M0L1.1	28	46.052.4554.1	44	46.422.5030.1	30
46.032.M0L1.4	28	46.052.5050.4	50	46.422.5032.4	30
46.032.M0L1.6	28	46.052.5051.4	46	46.422.5033.1	30
46.032.M0L1.9	28	46.052.5053.0	50	46.422.5034.1	31
46.032.M050.4	36	46.052.5053.1	50	46.422.5037.4	30
46.032.M050.6	36	46.052.5053.6	50	46.422.5038.4	31
46.032.M053.0	36	46.052.5053.9	50	46.423.1030.1	32
46.032.M053.1	36	46.052.5054.0	46	46.423.1032.4	32
46.032.M053.9	36	46.052.5054.1	46	46.423.1033.1	32
46.032.M055.7	36	46.052.M0L0.0	49	46.423.1034.1	33
46.050.0150.4	51	46.052.M0L0.1	49	46.423.1037.4	32
46.050.0151.4	47	46.052.M0L0.4	49	46.423.1038.4	33
46.050.0153.0	51	46.052.M0L0.6	49	46.423.2030.1	32
46.050.0153.1	51	46.052.M0L0.9	49	46.423.2032.4	32
46.050.0153.6	51	46.052.M0L1.0	45	46.423.2033.1	32
46.050.0153.9	51	46.052.M0L1.1	45	46.423.2034.1	33
46.050.0154.0	47	46.052.M0L1.4	45	46.423.2037.4	32
46.050.0154.1	47	46.052.M050.4	49	46.423.2038.4	33
46.050.1250.4	51	46.052.M051.4	45	46.423.3030.1	32
46.050.1251.4	47	46.052.M053.0	49	46.423.3032.4	32
46.050.1253.0	51	46.052.M053.1	49	46.423.3033.1	32
46.050.1253.1	51	46.052.M053.6	49	46.423.3034.1	33
46.050.1253.6	51	46.052.M053.9	49	46.423.3037.4	32
46.050.1253.9	51	46.052.M054.0	45	46.423.3038.4	33
46.050.1254.0	47	46.052.M054.1	45	46.423.4030.1	32
46.050.1254.1	47	46.422.0508.4	31	46.423.4032.4	32
46.051.4150.4	48	46.422.0538.4	31	46.423.4033.1	32
46.051.4151.4	44	46.422.1000.1	30	46.423.4034.1	33
46.051.4153.0	48	46.422.1002.4	30	46.423.4037.4	32
46.051.4153.1	48	46.422.1003.1	30	46.423.4038.4	33
46.051.4153.6	48	46.422.1004.1	31	46.423.5030.1	32
46.051.4153.9	48	46.422.1007.4	30	46.423.5032.4	32
46.051.4154.0	44	46.422.1008.4	31	46.423.5033.1	32
46.051.4154.1	44	46.422.1030.1	30	46.423.5034.1	33
46.051.4550.4	48	46.422.1032.4	30	46.423.5037.4	32
46.051.4551.4	44	46.422.1033.1	30	46.423.5038.4	33
46.051.4553.0	48	46.422.1034.1	31	46.423.6030.1	32



INDEX

PART NUMBER | PAGE

46.423.6032.4	32	46.433.2030.1	42	46.452.05C4.6	54
46.423.6033.1	32	46.433.2030.9	42	46.452.10B0.1	52
46.423.6034.1	33	46.433.2031.7	42	46.452.10B0.6	52
46.423.6037.4	32	46.433.2033.1	43	46.452.10B3.1	53
46.423.6038.4	33	46.433.2033.9	43	46.452.10B3.6	53
46.423.7030.1	32	46.433.2034.1	43	46.452.10B4.1	54
46.423.7032.4	32	46.433.2034.9	43	46.452.10B4.6	54
46.423.7033.1	32	46.433.2035.7	43	46.452.10C0.1	52
46.423.7034.1	33	46.433.2036.7	43	46.452.10C0.6	52
46.423.7037.4	32	46.433.3000.1	42	46.452.10C3.1	53
46.423.7038.4	33	46.433.3003.1	43	46.452.10C3.6	53
46.423.8030.1	32	46.433.3004.1	43	46.452.10C4.1	54
46.423.8032.4	32	46.433.3030.1	42	46.452.10C4.6	54
46.423.8033.1	32	46.433.3030.9	42	46.452.10D0.1	52
46.423.8034.1	33	46.433.3031.7	42	46.452.10D0.6	52
46.423.8037.4	32	46.433.3033.1	43	46.452.10D3.1	53
46.423.8038.4	33	46.433.3033.9	43	46.452.10D3.6	53
46.432.10B0.1	38	46.433.3034.1	43	46.452.10D4.1	54
46.432.10B3.1	39	46.433.3034.9	43	46.452.10D4.6	54
46.432.10B4.1	40	46.433.3035.7	43	46.452.20B0.1	52
46.432.10C0.1	38	46.433.3036.7	43	46.452.20B0.6	52
46.432.10C3.1	39	46.433.4000.1	42	46.452.20B3.1	53
46.432.10C4.1	40	46.433.4003.1	43	46.452.20B3.6	53
46.432.20B0.1	38	46.433.4004.1	43	46.452.20B4.1	54
46.432.20B3.1	39	46.433.4030.1	42	46.452.20B4.6	54
46.432.20B4.1	40	46.433.4030.9	42	46.452.20C0.1	52
46.432.20C0.1	38	46.433.4031.7	42	46.452.20C0.6	52
46.432.20C3.1	39	46.433.4033.1	43	46.452.20C3.1	53
46.432.20C4.1	40	46.433.4033.9	43	46.452.20C3.6	53
46.432.30B4.1	40	46.433.4034.1	43	46.452.20C4.1	54
46.432.0500.1	38	46.433.4034.9	43	46.452.20C4.6	54
46.432.0503.1	39	46.433.4035.7	43	46.452.20D0.1	52
46.432.0504.1	40	46.433.4036.7	43	46.452.20D0.6	52
46.432.0530.1	38	46.433.5000.1	42	46.452.20D3.1	53
46.432.0533.1	39	46.433.5003.1	43	46.452.20D3.6	53
46.432.0534.1	40	46.433.5004.1	43	46.452.20D4.1	54
46.432.1000.1	38	46.433.5030.1	42	46.452.20D4.6	54
46.432.1003.1	39	46.433.5030.9	42	46.452.30C0.6	52
46.432.1004.1	40	46.433.5031.7	42	46.452.40C0.6	52
46.432.1030.1	38	46.433.5033.1	43	46.452.50C0.6	52
46.432.1033.1	39	46.433.5033.9	43	46.452.0500.1	52
46.432.1034.1	40	46.433.5034.1	43	46.452.0500.6	52
46.432.2000.1	38	46.433.5034.9	43	46.452.0503.1	53
46.432.2003.1	39	46.433.5035.7	43	46.452.0503.6	53
46.432.2004.1	40	46.433.5036.7	43	46.452.0504.6	54
46.432.2030.1	38	46.433.6000.1	42	46.452.0530.1	52
46.432.2033.1	39	46.433.6003.1	43	46.452.0530.6	52
46.432.2034.1	40	46.433.6004.1	43	46.452.0533.1	53
46.432.3000.1	38	46.433.6030.1	42	46.452.0533.6	53
46.432.3003.1	39	46.433.6030.9	42	46.452.0534.1	54
46.432.3004.1	40	46.433.6031.7	42	46.452.0534.6	54
46.432.3030.1	38	46.433.6033.1	43	46.452.0560.1	52
46.432.3033.1	39	46.433.6033.9	43	46.452.0560.6	52
46.432.3034.1	40	46.433.6034.1	43	46.452.0563.1	53
46.432.4000.1	38	46.433.6034.9	43	46.452.0563.6	53
46.432.4003.1	39	46.433.6035.7	43	46.452.0564.1	54
46.432.4004.1	40	46.433.6036.7	43	46.452.0564.6	54
46.432.4030.1	38	46.433.7000.1	42	46.452.1000.1	52
46.432.4033.1	39	46.433.7003.1	43	46.452.1000.6	52
46.432.4034.1	40	46.433.7004.1	43	46.452.1003.1	53
46.432.5000.1	38	46.433.7030.1	42	46.452.1003.6	53
46.432.5003.1	39	46.433.7030.9	42	46.452.1004.1	54
46.432.5004.1	40	46.433.7031.7	42	46.452.1004.6	54
46.432.5030.1	38	46.433.7033.1	43	46.452.1030.1	52
46.432.5033.1	39	46.433.7033.9	43	46.452.1030.6	52
46.432.5034.1	40	46.433.7034.1	43	46.452.1033.1	53
46.433.1000.1	42	46.433.7034.9	43	46.452.1033.6	53
46.433.1003.1	43	46.433.7035.7	43	46.452.1034.1	54
46.433.1004.1	43	46.433.7036.7	43	46.452.1034.6	54
46.433.1030.1	42	46.433.8000.1	42	46.452.1060.1	52
46.433.1030.9	42	46.433.8003.1	43	46.452.1060.6	52
46.433.1031.7	42	46.433.8004.1	43	46.452.1063.1	53
46.433.1033.1	43	46.433.8030.1	42	46.452.1063.6	53
46.433.1033.9	43	46.433.8030.9	42	46.452.1064.1	54
46.433.1034.1	43	46.433.8031.7	42	46.452.1064.6	54
46.433.1034.9	43	46.433.8033.1	43	46.452.2000.1	52
46.433.1035.7	43	46.433.8033.9	43	46.452.2000.6	52
46.433.1036.7	43	46.433.8034.1	43	46.452.2003.1	53
46.433.2000.1	42	46.433.8034.9	43	46.452.2003.6	53
46.433.2003.1	43	46.433.8035.7	43	46.452.2004.1	54
46.433.2004.1	43	46.433.8036.7	43	46.452.2004.6	54

INDEX

PART NUMBER | PAGE

46.452.2030.1	52
46.452.2030.6	52
46.452.2033.1	53
46.452.2033.6	53
46.452.2034.1	54
46.452.2034.6	54
46.452.2060.1	52
46.452.2060.6	52
46.452.2063.1	53
46.452.2063.6	53
46.452.2064.1	54
46.452.2064.6	54
46.452.3000.1	52
46.452.3000.6	52
46.452.3003.1	53
46.452.3003.6	53
46.452.3004.1	54
46.452.3004.6	54
46.452.3030.1	52
46.452.3030.6	52
46.452.3033.1	53
46.452.3033.6	53
46.452.3034.1	54
46.452.3034.6	54
46.452.3060.1	52
46.452.3060.6	52
46.452.3063.1	53
46.452.3063.6	53
46.452.3064.1	54
46.452.3064.6	54
46.452.4000.1	52
46.452.4000.6	52
46.452.4003.1	53
46.452.4003.6	53
46.452.4004.1	54
46.452.4004.6	54
46.452.4030.1	52
46.452.4030.6	52
46.452.4033.1	53
46.452.4033.6	53
46.452.4034.1	54
46.452.4034.6	54
46.452.4060.1	52
46.452.4060.6	52
46.452.4063.1	53
46.452.4063.6	53
46.452.4064.1	54
46.452.4064.6	54
46.452.5000.1	52
46.452.5000.6	52
46.452.5003.1	53
46.452.5003.6	53
46.452.5004.1	54
46.452.5004.6	54
46.452.5030.1	52
46.452.5030.6	52
46.452.5033.1	53
46.452.5033.6	53
46.452.5034.1	54
46.452.5034.6	54
46.452.5060.1	52
46.452.5060.6	52
46.452.5063.1	53
46.452.5063.6	53
46.452.5064.1	54
46.452.5064.6	54
46.452.6003.1	53
46.452.6033.1	53
46.453.1000.1	55
46.453.1000.6	55
46.453.1003.1	55
46.453.1003.6	55
46.453.1004.1	56
46.453.1004.6	56
46.453.1030.1	55
46.453.1030.6	55
46.453.1033.1	55
46.453.1033.6	55
46.453.1034.1	56
46.453.1034.6	56
46.453.1060.6	55

46.453.1063.6	55
46.453.1064.6	56
46.453.2000.1	55
46.453.2000.6	55
46.453.2003.1	55
46.453.2003.6	55
46.453.2004.1	56
46.453.2004.6	56
46.453.2030.1	55
46.453.2030.6	55
46.453.2033.1	55
46.453.2033.6	55
46.453.2034.1	56
46.453.2034.6	56
46.453.2060.6	55
46.453.2063.6	55
46.453.2064.6	56
46.453.3000.1	55
46.453.3000.6	55
46.453.3003.1	55
46.453.3003.6	55
46.453.3004.1	56
46.453.3004.6	56
46.453.3030.1	55
46.453.3030.6	55
46.453.3033.1	55
46.453.3033.6	55
46.453.3034.1	56
46.453.3034.6	56
46.453.3060.6	55
46.453.3063.6	55
46.453.3064.6	56
46.453.4000.1	55
46.453.4000.6	55
46.453.4003.1	55
46.453.4003.6	55
46.453.4004.1	56
46.453.4004.6	56
46.453.4030.1	55
46.453.4030.6	55
46.453.4033.1	55
46.453.4033.6	55
46.453.4034.1	56
46.453.4034.6	56
46.453.4060.6	55
46.453.4063.6	55
46.453.5000.1	55
46.453.5000.6	55
46.453.5003.1	55
46.453.5003.6	55
46.453.5004.1	56
46.453.5004.6	56
46.453.5030.1	55
46.453.5030.6	55
46.453.5033.1	55
46.453.5033.6	55
46.453.5034.1	56
46.453.5034.6	56
46.453.5060.6	55
46.453.5063.6	55
46.453.5064.6	56
46.453.6000.1	55
46.453.6000.6	55
46.453.6003.1	55
46.453.6003.6	55
46.453.6004.1	56
46.453.6004.6	56
46.453.6030.1	55
46.453.6030.6	55
46.453.6033.1	55
46.453.6033.6	55
46.453.6034.1	56
46.453.6034.6	56
46.453.6060.6	55
46.453.6063.6	55
46.453.6064.6	56
46.453.7000.1	55
46.453.7000.6	55
46.453.7003.1	55
46.453.7003.6	55

46.453.7004.1	56
46.453.7004.6	56
46.453.7030.1	55
46.453.7030.6	55
46.453.7033.1	55
46.453.7033.6	55
46.453.7034.1	56
46.453.7034.6	56
46.453.7060.6	55
46.453.7063.6	55
46.453.7064.6	56
46.453.8000.1	55
46.453.8000.6	55
46.453.8003.1	55
46.453.8003.6	55
46.453.8004.1	56
46.453.8004.6	56
46.453.8030.1	55
46.453.8030.6	55
46.453.8033.1	55
46.453.8033.6	55
46.453.8034.1	56
46.453.8034.6	56
46.453.8060.6	55
46.453.8063.6	55
46.453.8064.6	56
95.101.0800.0	168
95.101.1300.0	168
96.020.0150.8	71
96.020.0151.4	71
96.020.0153.0	71
96.020.0153.1	71
96.020.0155.7	71
96.020.0250.8	71
96.020.0251.4	71
96.020.0253.0	71
96.020.0253.1	71
96.021.0050.8	66
96.021.0051.4	66
96.021.0053.0	66
96.021.0053.1	66
96.021.0150.8	66
96.021.0151.4	66
96.021.0153.0	66
96.021.0153.1	66
96.021.0250.8	67
96.021.0251.4	67
96.021.0253.0	67
96.021.0253.1	67
96.021.0351.4	67
96.021.0353.0	67
96.021.0353.1	67
96.021.0453.0	66
96.021.0453.1	66
96.021.0950.8	66
96.021.0951.4	66
96.021.1050.8	70
96.021.1051.4	70
96.021.1053.0	70
96.021.1053.1	70
96.021.2050.8	69
96.021.2051.4	69
96.021.2053.0	69
96.021.2053.1	69
96.021.2150.8	68
96.021.2151.4	68
96.021.2153.0	68
96.021.2153.1	68
96.021.4050.8	64
96.021.4051.4	64
96.021.4053.0	64
96.021.4053.1	64
96.021.4055.7	64
96.021.4150.8	64
96.021.4151.4	64
96.021.4153.0	64
96.021.4153.1	64
96.021.4155.7	64
96.021.4250.8*	65
96.021.4251.4*	65
96.021.4253.0*	65



INDEX

PART NUMBER | PAGE

96.021.4253.1*	65	96.023.0153.0	66	96.030.0253.1	89
96.021.4351.4*	65	96.023.0153.1	66	96.030.0255.7	89
96.021.4353.0*	65	96.023.0950.8	67	96.031.0051.4	80
96.021.4353.1*	65	96.023.0951.4	67	96.031.0053.0	80
96.021.4451.4	64	96.023.2050.8	69	96.031.0053.1	80
96.021.4453.0	64	96.023.2051.4	69	96.031.0053.9	80
96.021.4453.1	64	96.023.2053.0	69	96.031.0055.7	80
96.021.4950.8	64	96.023.2053.1	69	96.031.0151.4	80
96.021.4951.4	64	96.023.2250.8	70	96.031.0153.0	80
96.021.5050.8	70	96.023.2251.4	70	96.031.0153.1	80
96.021.5051.4	70	96.023.2253.0	70	96.031.0153.9	80
96.021.5053.0	70	96.023.2253.1	70	96.031.0155.7	80
96.021.5053.1	70	96.023.4050.8	65	96.031.0253.0	80
96.021.6050.8	69	96.023.4051.4	65	96.031.0253.1	80
96.021.6051.4	69	96.023.4053.0	65	96.031.0253.9	80
96.021.6053.0	69	96.023.4053.1	65	96.031.0255.7	80
96.021.6053.1	69	96.023.4150.8	65	96.031.0353.0	81
96.021.6150.8	68	96.023.4151.4	65	96.031.0353.1	81
96.021.6151.4	68	96.023.4153.0	65	96.031.0353.9	81
96.021.6153.0	68	96.023.4153.1	65	96.031.0355.7	81
96.021.6153.1	68	96.023.4950.8	65	96.031.0553.9	80
96.022.0050.8	66	96.023.4951.4	65	96.031.0555.7	80
96.022.0051.4	66	96.023.6050.8	69	96.031.1051.4	87
96.022.0053.0	66	96.023.6051.4	69	96.031.1053.0	87
96.022.0053.1	66	96.023.6053.0	69	96.031.1053.1	87
96.022.0150.8	66	96.023.6053.1	69	96.031.1053.9	87
96.022.0151.4	66	96.023.6250.8	70	96.031.1055.7	87
96.022.0153.0	66	96.023.6251.4	70	96.031.2051.4	85
96.022.0153.1	66	96.023.6253.0	70	96.031.2053.0	85
96.022.0253.1	67	96.023.6253.1	70	96.031.2053.1	85
96.022.0350.8	67	96.024.0050.8	66	96.031.2053.9	85
96.022.0453.0	66	96.024.0051.4	66	96.031.2055.7	85
96.022.0453.1	66	96.024.0053.0	66	96.031.2151.4	83
96.022.0950.8	66	96.024.0053.1	66	96.031.2153.0	83
96.022.0951.4	66	96.024.0150.8	66	96.031.2153.1	83
96.022.1050.8	70	96.024.0151.4	66	96.031.2153.9	83
96.022.1051.4	70	96.024.0153.0	66	96.031.2155.7	83
96.022.1053.0	70	96.024.0153.1	66	96.031.4051.4	78
96.022.1053.1	70	96.024.0950.8	67	96.031.4053.0	78
96.022.2050.8	69	96.024.0951.4	67	96.031.4053.1	78
96.022.2051.4	69	96.024.2050.8	69	96.031.4053.9	78
96.022.2053.0	69	96.024.2051.4	69	96.031.4054.3	150
96.022.2053.1	69	96.024.2053.0	69	96.031.4055.7	78
96.022.2150.8	68	96.024.2053.1	69	96.031.4151.4	78
96.022.2151.4	68	96.024.2250.8	70	96.031.4153.0	78
96.022.2153.0	68	96.024.2251.4	70	96.031.4153.1	78
96.022.2153.1	68	96.024.2253.0	70	96.031.4153.9	78
96.022.4050.8	64	96.024.2253.1	70	96.031.4154.3	150
96.022.4051.4	64	96.024.4050.8	65	96.031.4155.7	78
96.022.4053.0	64	96.024.4051.4	65	96.031.4251.4*	79
96.022.4053.1	64	96.024.4053.0	65	96.031.4253.0*	79
96.022.4055.7	64	96.024.4053.1	65	96.031.4253.1*	79
96.022.4150.8	64	96.024.4150.8	65	96.031.4253.9*	79
96.022.4151.4	64	96.024.4151.4	65	96.031.4254.3*	150
96.022.4153.0	64	96.024.4153.0	65	96.031.4255.7*	79
96.022.4153.1	64	96.024.4153.1	65	96.031.4353.0*	79
96.022.4155.7	64	96.024.4950.8	65	96.031.4353.1*	79
96.022.4350.8*	65	96.024.4951.4	65	96.031.4353.9*	79
96.022.4451.4	64	96.024.6050.8	69	96.031.4355.7*	79
96.022.4453.0	64	96.024.6051.4	69	96.031.4551.4	78
96.022.4453.1	64	96.024.6053.0	69	96.031.4553.0	78
96.022.4950.8	64	96.024.6053.1	69	96.031.4553.1	78
96.022.4951.4	64	96.024.6250.8	70	96.031.4553.9	78
96.022.5050.8	70	96.024.6251.4	70	96.031.4554.3	150
96.022.5051.4	70	96.024.6253.0	70	96.031.4555.7	78
96.022.5053.0	70	96.024.6253.1	70	96.031.5051.4	87
96.022.5053.1	70	96.025.2153.0	68	96.031.5053.0	87
96.022.6050.8	69	96.025.2153.1	68	96.031.5053.1	87
96.022.6051.4	69	96.025.6153.0	68	96.031.5053.9	87
96.022.6053.0	69	96.025.6153.1	68	96.031.5054.3	153
96.022.6053.1	69	96.026.2153.0	68	96.031.5055.7	87
96.022.6150.8	68	96.026.2153.1	68	96.031.6051.4	85
96.022.6151.4	68	96.026.6153.0	68	96.031.6053.0	85
96.022.6153.0	68	96.026.6153.1	68	96.031.6053.1	85
96.022.6153.1	68	96.030.0151.4	89	96.031.6053.9	85
96.023.0050.8	66	96.030.0153.0	89	96.031.6054.3	152
96.023.0051.4	66	96.030.0153.1	89	96.031.6055.7	85
96.023.0053.0	66	96.030.0153.9	89	96.031.6151.4	83
96.023.0053.1	66	96.030.0155.7	89	96.031.6153.0	83
96.023.0150.8	66	96.030.0251.4	89	96.031.6153.1	83
96.023.0151.4	66	96.030.0253.0	89	96.031.6153.9	83

INDEX

PART NUMBER | PAGE

96.031.6154.3	151	96.033.0153.9	80	96.035.2153.1	83
96.031.6155.7	83	96.033.0155.7	80	96.035.6153.0	83
96.032.0051.4	80	96.033.2051.4	85	96.035.6153.1	83
96.032.0053.0	80	96.033.2053.0	85	96.036.2153.0	83
96.032.0053.1	80	96.033.2053.1	85	96.036.2153.1	83
96.032.0053.9	80	96.033.2053.9	85	96.036.6153.0	83
96.032.0055.7	80	96.033.2055.7	85	96.036.6153.1	83
96.032.0151.4	80	96.033.2251.4	87	96.040.0151.4	104
96.032.0153.0	80	96.033.2253.0	87	96.041.4051.4	98
96.032.0153.1	80	96.033.2253.1	87	96.041.4053.0	98
96.032.0153.9	80	96.033.2253.9	87	96.041.4053.1	98
96.032.0155.7	80	96.033.2255.7	87	96.041.4151.4	98
96.032.0251.4	80	96.033.4051.4	78	96.041.4153.0	98
96.032.0253.1	80	96.033.4053.0	78	96.041.4153.1	98
96.032.0351.4	81	96.033.4053.1	78	96.041.4253.0*	98
96.032.0553.9	80	96.033.4053.9	78	96.041.4253.1*	98
96.032.0555.7	80	96.033.4054.3	150	96.041.4353.0*	99
96.032.1051.4	87	96.033.4055.7	78	96.041.4353.1*	99
96.032.1053.0	87	96.033.4151.4	78	96.041.4553.0	98
96.032.1053.1	87	96.033.4153.0	78	96.041.4553.1	98
96.032.1053.9	87	96.033.4153.1	78	96.041.5051.4	103
96.032.1055.7	87	96.033.4153.9	78	96.041.5053.0	103
96.032.2051.4	85	96.033.4154.3	150	96.041.5053.1	103
96.032.2053.0	85	96.033.4155.7	78	96.041.6051.4	102
96.032.2053.1	85	96.033.6051.4	85	96.041.6053.0	102
96.032.2053.9	85	96.033.6053.0	85	96.041.6053.1	102
96.032.2055.7	85	96.033.6053.1	85	96.041.6153.0	101
96.032.2151.4	83	96.033.6053.9	85	96.041.6153.1	101
96.032.2153.0	83	96.033.6054.3	152	96.042.4051.4	98
96.032.2153.1	83	96.033.6055.7	85	96.042.4053.0	98
96.032.2153.9	83	96.033.6251.4	87	96.042.4053.1	98
96.032.2155.7	83	96.033.6253.0	87	96.042.4151.4	98
96.032.4051.4	78	96.033.6253.1	87	96.042.4153.0	98
96.032.4053.0	78	96.033.6253.9	87	96.042.4153.1	98
96.032.4053.1	78	96.033.6254.3	153	96.042.4353.1*	99
96.032.4053.9	78	96.033.6255.7	87	96.042.4553.0	98
96.032.4054.3	150	96.034.0051.4	80	96.042.4553.1	98
96.032.4055.7	78	96.034.0053.0	80	96.042.5051.4	103
96.032.4151.4	78	96.034.0053.1	80	96.042.5053.0	103
96.032.4153.0	78	96.034.0053.9	80	96.042.5053.1	103
96.032.4153.1	78	96.034.0055.7	80	96.042.6051.4	102
96.032.4153.9	78	96.034.0151.4	80	96.042.6053.0	102
96.032.4154.3	150	96.034.0153.0	80	96.042.6053.1	102
96.032.4155.7	78	96.034.0153.1	80	96.042.6153.0	101
96.032.4251.4*	79	96.034.0153.9	80	96.042.6153.1	101
96.032.4253.0*	79	96.034.0155.7	80	96.043.4053.0	98
96.032.4253.1*	79	96.034.2051.4	85	96.043.4053.1	98
96.032.4353.0*	79	96.034.2053.0	85	96.043.4153.0	98
96.032.4353.1*	79	96.034.2053.1	85	96.043.4153.1	98
96.032.4551.4	78	96.034.2053.9	85	96.043.6053.0	102
96.032.4553.0	78	96.034.2055.7	85	96.043.6053.1	102
96.032.4553.1	78	96.034.2251.4	87	96.043.6251.4	103
96.032.4553.9	78	96.034.2253.0	87	96.043.6253.0	103
96.032.4554.3	150	96.034.2253.1	87	96.043.6253.1	103
96.032.4555.7	78	96.034.2253.9	87	96.044.4053.0	98
96.032.5051.4	87	96.034.2255.7	87	96.044.4053.1	98
96.032.5053.0	87	96.034.4051.4	78	96.044.4153.0	98
96.032.5053.1	87	96.034.4053.0	78	96.044.4153.1	98
96.032.5053.9	87	96.034.4053.1	78	96.044.6051.4	102
96.032.5054.3	153	96.034.4053.9	78	96.044.6053.0	102
96.032.5055.7	87	96.034.4054.3	150	96.044.6053.1	102
96.032.6051.4	85	96.034.4055.7	78	96.044.6251.4	103
96.032.6053.0	85	96.034.4151.4	78	96.044.6253.0	103
96.032.6053.1	85	96.034.4153.0	78	96.044.6253.1	103
96.032.6053.9	85	96.034.4153.1	78	96.045.6153.0	101
96.032.6054.3	152	96.034.4153.9	78	96.045.6153.1	101
96.032.6055.7	85	96.034.4154.3	150	96.046.6153.0	101
96.032.6151.4	83	96.034.4155.7	78	96.046.6153.1	101
96.032.6153.0	83	96.034.6051.4	85	96.050.0153.0	116
96.032.6153.1	83	96.034.6053.0	85	96.050.0153.1	116
96.032.6153.9	83	96.034.6053.1	85	96.050.0153.9	116
96.032.6154.3	151	96.034.6053.9	85	96.050.1153.1	116
96.032.6155.7	83	96.034.6054.3	152	96.050.2153.1	116
96.033.0051.4	80	96.034.6055.7	85	96.050.3153.1	116
96.033.0053.0	80	96.034.6251.4	87	96.050.4153.1	116
96.033.0053.1	80	96.034.6253.0	87	96.050.5153.1	116
96.033.0053.9	80	96.034.6253.1	87	96.050.6153.1	116
96.033.0055.7	80	96.034.6253.9	87	96.050.7153.1	116
96.033.0151.4	80	96.034.6254.3	153	96.051.4051.4	110
96.033.0153.0	80	96.034.6255.7	87	96.051.4053.0	110
96.033.0153.1	80	96.035.2153.0	83		



INDEX

PART NUMBER | PAGE

96.051.4053.1	110	96.052.6051.4	114	96.063.4153.6	128
96.051.4053.6	110	96.052.6053.0	114	96.063.6053.6	133
96.051.4053.8	110	96.052.6053.1	114	96.063.6253.6	135
96.051.4053.9	110	96.052.6053.6	114	96.064.4053.6	128
96.051.4054.3	156	96.052.6053.9	114	96.064.4153.6	128
96.051.4151.4	110	96.052.6054.3	159	96.064.6053.6	133
96.051.4153.0	110	96.052.6151.4	113	96.064.6253.6	135
96.051.4153.1	110	96.052.6153.0	113	96.065.6153.6	131
96.051.4153.6	110	96.052.6153.1	113	96.066.6153.6	131
96.051.4153.8	110	96.052.6153.6	113	96.071.4053.0	138
96.051.4153.9	110	96.052.6153.9	113	96.071.4053.1	138
96.051.4154.3	156	96.052.6154.3	158	96.071.4053.6	138
96.051.4251.4*	110	96.053.4051.4	110	96.071.4053.9	138
96.051.4253.0*	110	96.053.4053.0	110	96.071.4153.0	139
96.051.4253.1*	110	96.053.4053.1	110	96.071.4153.1	139
96.051.4253.6*	110	96.053.4053.6	110	96.071.4153.6	139
96.051.4253.9*	110	96.053.4053.9	110	96.071.4153.9	139
96.051.4351.4*	111	96.053.4151.4	110	96.071.4253.0*	140
96.051.4353.0*	111	96.053.4153.0	110	96.071.4253.1*	140
96.051.4353.1*	111	96.053.4153.1	110	96.071.4253.6*	140
96.051.4353.6*	111	96.053.4153.6	110	96.071.4253.9*	140
96.051.4353.9*	111	96.053.4153.9	110	96.071.4353.0*	140
96.051.4551.4	110	96.053.6051.4	114	96.071.4353.1*	140
96.051.4553.0	110	96.053.6053.0	114	96.071.4353.6*	140
96.051.4553.1	110	96.053.6053.1	114	96.071.4353.9*	140
96.051.4553.6	110	96.053.6053.6	114	96.071.4553.0	139
96.051.4553.8	110	96.053.6053.9	114	96.071.4553.1	139
96.051.4553.9	110	96.053.6054.3	159	96.071.4553.6	139
96.051.4554.3	156	96.053.6251.4	115	96.071.4553.9	139
96.051.5051.4	115	96.053.6253.0	115	96.071.4853.0	138
96.051.5053.0	115	96.053.6253.1	115	96.071.4853.1	138
96.051.5053.1	115	96.053.6253.6	115	96.071.4853.6	138
96.051.5053.6	115	96.053.6253.9	115	96.071.4853.9	138
96.051.5053.9	115	96.053.6254.3	160	96.071.6053.0	145
96.051.5054.3	160	96.054.4051.4	110	96.071.6053.1	145
96.051.6051.4	114	96.054.4053.0	110	96.071.6053.6	145
96.051.6053.0	114	96.054.4053.1	110	96.071.6053.9	145
96.051.6053.1	114	96.054.4053.6	110	96.071.6153.0	143
96.051.6053.6	114	96.054.4053.9	110	96.071.6153.1	143
96.051.6053.9	114	96.054.4151.4	110	96.071.6153.6	143
96.051.6054.3	159	96.054.4153.0	110	96.071.6153.9	143
96.051.6151.4	113	96.054.4153.1	110	96.071.6253.0	147
96.051.6153.0	113	96.054.4153.6	110	96.071.6253.1	147
96.051.6153.1	113	96.054.4153.9	110	96.071.6253.6	147
96.051.6153.6	113	96.054.6051.4	114	96.071.6253.9	147
96.051.6153.9	113	96.054.6053.0	114	96.071.6353.1	149
96.051.6154.3	158	96.054.6053.1	114	96.071.6353.6	149
96.052.4051.4	110	96.054.6053.6	114	96.071.6353.9	149
96.052.4053.0	110	96.054.6053.9	114	96.072.4053.0	138
96.052.4053.1	110	96.054.6054.3	159	96.072.4053.1	138
96.052.4053.6	110	96.054.6251.4	115	96.072.4053.6	138
96.052.4053.8	110	96.054.6253.0	115	96.072.4053.9	138
96.052.4053.9	110	96.054.6253.1	115	96.072.4153.0	139
96.052.4054.3	156	96.054.6253.6	115	96.072.4153.1	139
96.052.4151.4	110	96.054.6253.9	115	96.072.4153.6	139
96.052.4153.0	110	96.054.6254.3	160	96.072.4153.9	139
96.052.4153.1	110	96.055.6153.0	113	96.072.4253.1*	140
96.052.4153.6	110	96.055.6153.1	113	96.072.4253.6*	140
96.052.4153.8	110	96.055.6153.6	113	96.072.4553.0	139
96.052.4153.9	110	96.056.6153.0	113	96.072.4553.1	139
96.052.4154.3	156	96.056.6153.1	113	96.072.4553.6	139
96.052.4251.4*	110	96.056.6153.6	113	96.072.4553.9	139
96.052.4253.0*	110	96.061.4053.6	126	96.072.4853.0	138
96.052.4253.1*	110	96.061.4153.6	127	96.072.4853.1	138
96.052.4253.6*	110	96.061.4253.6*	128	96.072.4853.6	138
96.052.4353.0*	111	96.061.4353.6*	128	96.072.4853.9	138
96.052.4353.1*	111	96.061.4553.6	127	96.072.6053.0	145
96.052.4353.6*	111	96.061.4853.6	126	96.072.6053.1	145
96.052.4551.4	110	96.061.6053.6	133	96.072.6053.6	145
96.052.4553.0	110	96.061.6153.6	131	96.072.6053.9	145
96.052.4553.1	110	96.061.6253.6	135	96.072.6153.0	143
96.052.4553.6	110	96.061.6353.6	137	96.072.6153.1	143
96.052.4553.8	110	96.062.4053.6	126	96.072.6153.6	143
96.052.4553.9	110	96.062.4153.6	127	96.072.6153.9	143
96.052.4554.3	156	96.062.4553.6	127	96.072.6253.0	147
96.052.5051.4	115	96.062.4853.6	126	96.072.6253.1	147
96.052.5053.0	115	96.062.6053.6	133	96.072.6253.6	147
96.052.5053.1	115	96.062.6153.6	131	96.072.6253.9	147
96.052.5053.6	115	96.062.6253.6	135	96.072.6353.1	149
96.052.5053.9	115	96.062.6353.6	137	96.072.6353.6	149
96.052.5054.3	160	96.063.4053.6	128	96.072.6353.9	149

INDEX

PART NUMBER | PAGE

96.073.4053.0	140	96.134.2253.0	88	96.152.0053.9	112
96.073.4053.1	140	96.134.2253.1	88	96.152.0151.4	112
96.073.4053.6	140	96.135.2153.0	84	96.152.0153.0	112
96.073.4053.9	140	96.135.2153.1	84	96.152.0153.1	112
96.073.4153.0	140	96.136.2153.0	84	96.152.0153.6	112
96.073.4153.1	140	96.136.2153.1	84	96.152.0153.9	112
96.073.4153.6	140	96.141.0053.0	100	96.152.0551.4	112
96.073.4153.9	140	96.141.0053.1	100	96.152.0553.0	112
96.073.6053.0	145	96.141.0153.0	100	96.152.0553.1	112
96.073.6053.1	145	96.141.0153.1	100	96.152.0553.6	112
96.073.6053.6	145	96.141.0553.0	100	96.152.0553.9	112
96.073.6053.9	145	96.141.0553.1	100	96.152.1051.4	115
96.073.6253.0	147	96.141.1053.0	103	96.152.1053.0	115
96.073.6253.1	147	96.141.1053.1	103	96.152.1053.1	115
96.073.6253.6	147	96.141.2053.0	102	96.152.1053.6	115
96.073.6253.9	147	96.141.2053.1	102	96.152.1053.8	115
96.074.4053.0	140	96.141.2153.0	101	96.152.1053.9	115
96.074.4053.1	140	96.141.2153.1	101	96.152.2051.4	114
96.074.4053.6	140	96.142.0053.0	100	96.152.2053.0	114
96.074.4053.9	140	96.142.0053.1	100	96.152.2053.1	114
96.074.4153.0	140	96.142.0153.0	100	96.152.2053.6	114
96.074.4153.1	140	96.142.0153.1	100	96.152.2053.9	114
96.074.4153.6	140	96.142.0553.0	100	96.152.2151.4	113
96.074.4153.9	140	96.142.0553.1	100	96.152.2153.0	113
96.074.6053.0	145	96.142.1053.0	103	96.152.2153.1	113
96.074.6053.1	145	96.142.1053.1	103	96.152.2153.6	113
96.074.6053.6	145	96.142.2053.0	102	96.152.2153.9	113
96.074.6053.9	145	96.142.2053.1	102	96.153.0051.4	112
96.074.6253.0	147	96.142.2153.0	101	96.153.0053.0	112
96.074.6253.1	147	96.142.2153.1	101	96.153.0053.1	112
96.074.6253.6	147	96.143.0053.0	100	96.153.0053.6	112
96.074.6253.9	147	96.143.0053.1	100	96.153.0053.9	112
96.075.6153.0	143	96.143.0153.0	100	96.153.0151.4	112
96.075.6153.1	143	96.143.0153.1	100	96.153.0153.0	112
96.075.6153.6	143	96.143.2053.0	102	96.153.0153.1	112
96.075.6153.9	143	96.143.2053.1	102	96.153.0153.6	112
96.076.6153.0	143	96.143.2253.0	103	96.153.0153.9	112
96.076.6153.1	143	96.143.2253.1	103	96.153.2051.4	114
96.076.6153.6	143	96.144.0053.0	100	96.153.2053.0	114
96.076.6153.9	143	96.144.0053.1	100	96.153.2053.1	114
96.131.0053.0	82	96.144.0153.0	100	96.153.2053.6	114
96.131.0053.1	82	96.144.0153.1	100	96.153.2053.9	114
96.131.0055.7	82	96.144.2053.0	102	96.153.2251.4	115
96.131.0153.0	82	96.144.2053.1	102	96.153.2253.0	115
96.131.0153.1	82	96.144.2253.0	103	96.153.2253.1	115
96.131.0155.7	82	96.144.2253.1	103	96.153.2253.6	115
96.131.1053.0	88	96.151.0051.4	112	96.153.2253.9	115
96.131.1053.1	88	96.151.0053.0	112	96.154.0051.4	112
96.131.1055.7	88	96.151.0053.1	112	96.154.0053.0	112
96.131.2053.0	86	96.151.0053.6	112	96.154.0053.1	112
96.131.2053.1	86	96.151.0053.9	112	96.154.0053.6	112
96.131.2153.0	84	96.151.0151.4	112	96.154.0053.9	112
96.131.2153.1	84	96.151.0153.0	112	96.154.0151.4	112
96.131.4553.0	82	96.151.0153.1	112	96.154.0153.0	112
96.131.4553.1	82	96.151.0153.6	112	96.154.0153.1	112
96.132.0053.0	82	96.151.0153.9	112	96.154.0153.6	112
96.132.0053.1	82	96.151.0551.4	112	96.154.0153.9	112
96.132.0055.7	82	96.151.0553.0	112	96.154.2051.4	114
96.132.0153.0	82	96.151.0553.1	112	96.154.2053.0	114
96.132.0153.1	82	96.151.0553.6	112	96.154.2053.1	114
96.132.1053.0	88	96.151.0553.9	112	96.154.2053.6	114
96.132.1053.1	88	96.151.1051.4	115	96.154.2053.9	114
96.132.1055.7	88	96.151.1053.0	115	96.154.2251.4	115
96.132.2053.0	86	96.151.1053.1	115	96.154.2253.0	115
96.132.2053.1	86	96.151.1053.6	115	96.154.2253.1	115
96.132.2153.0	84	96.151.1053.8	115	96.154.2253.6	115
96.132.2153.1	84	96.151.1053.9	115	96.154.2253.9	115
96.132.4553.0	82	96.151.2051.4	114	96.155.2153.0	113
96.132.4553.1	82	96.151.2053.0	114	96.156.2153.0	113
96.133.0053.0	82	96.151.2053.1	114	96.161.0053.6	129
96.133.0153.0	82	96.151.2053.6	114	96.161.0153.6	129
96.133.0153.1	82	96.151.2053.9	114	96.161.0553.6	130
96.133.2053.0	86	96.151.2151.4	113	96.161.0853.6	129
96.133.2053.1	86	96.151.2153.0	113	96.161.2053.6	133
96.133.2253.0	88	96.151.2153.1	113	96.161.2153.6	131
96.133.2253.1	88	96.151.2153.6	113	96.161.2253.6	135
96.134.0053.0	82	96.151.2153.9	113	96.161.2353.6	137
96.134.0153.0	82	96.152.0051.4	112	96.162.0053.6	129
96.134.0153.1	82	96.152.0053.0	112	96.162.0153.6	129
96.134.2053.0	86	96.152.0053.1	112	96.162.0553.6	130
96.134.2053.1	86	96.152.0053.6	112	96.162.0853.6	129



INDEX

PART NUMBER | PAGE

96.162.2053.6	133	96.173.0153.1	142	96.222.3037.4	73
96.162.2153.6	131	96.173.0153.6	142	96.222.3038.4	73
96.162.2253.6	135	96.173.0153.9	142	96.222.3092.4	72
96.162.2353.6	137	96.173.2053.0	146	96.222.3092.8	72
96.163.0053.6	130	96.173.2053.1	146	96.222.3097.4	73
96.163.0153.6	130	96.173.2053.6	146	96.222.3097.8	73
96.163.2053.6	134	96.173.2053.9	146	96.222.3098.4	73
96.163.2253.6	136	96.173.2253.0	148	96.222.3098.8	73
96.164.0053.6	130	96.173.2253.1	148	96.222.4000.1	72
96.164.0153.6	130	96.173.2253.6	148	96.222.4002.4	72
96.164.2053.6	134	96.173.2253.9	148	96.222.4003.1	73
96.164.2253.6	136	96.174.0053.0	142	96.222.4004.1	73
96.165.2153.6	132	96.174.0053.1	142	96.222.4007.4	73
96.166.2153.6	132	96.174.0053.6	142	96.222.4008.4	73
96.171.0053.0	141	96.174.0053.9	142	96.222.4030.1	72
96.171.0053.1	141	96.174.0153.0	142	96.222.4032.4	72
96.171.0053.6	141	96.174.0153.1	142	96.222.4033.1	73
96.171.0053.9	141	96.174.0153.6	142	96.222.4034.1	73
96.171.0153.0	141	96.174.0153.9	142	96.222.4037.4	73
96.171.0153.1	141	96.174.2053.0	146	96.222.4038.4	73
96.171.0153.6	141	96.174.2053.1	146	96.222.4092.4	72
96.171.0153.9	141	96.174.2053.6	146	96.222.4092.8	72
96.171.0553.0	142	96.174.2053.9	146	96.222.4097.4	73
96.171.0553.1	142	96.174.2253.0	148	96.222.4097.8	73
96.171.0553.6	142	96.174.2253.1	148	96.222.4098.4	73
96.171.0553.9	142	96.174.2253.6	148	96.222.4098.8	73
96.171.0853.0	141	96.174.2253.9	148	96.222.5000.1	72
96.171.0853.1	141	96.175.2153.0	144	96.222.5002.4	72
96.171.0853.6	141	96.175.2153.1	144	96.222.5003.1	73
96.171.0853.9	141	96.175.2153.6	144	96.222.5004.1	73
96.171.2053.0	145	96.175.2153.9	144	96.222.5007.4	73
96.171.2053.1	145	96.176.2153.0	144	96.222.5008.4	73
96.171.2053.6	145	96.176.2153.1	144	96.222.5030.1	72
96.171.2053.9	145	96.176.2153.6	144	96.222.5032.4	72
96.171.2153.0	143	96.176.2153.9	144	96.222.5033.1	73
96.171.2153.1	143	96.222.1000.1	72	96.222.5034.1	73
96.171.2153.6	143	96.222.1002.4	72	96.222.5037.4	73
96.171.2153.9	143	96.222.1003.1	73	96.222.5038.4	73
96.171.2253.0	147	96.222.1004.1	73	96.222.5092.4	72
96.171.2253.1	147	96.222.1007.4	73	96.222.5092.8	72
96.171.2253.6	147	96.222.1008.4	73	96.222.5097.4	73
96.171.2253.9	147	96.222.1030.1	72	96.222.5097.8	73
96.171.2353.1	149	96.222.1032.4	72	96.222.5098.4	73
96.171.2353.6	149	96.222.1033.1	73	96.222.5098.8	73
96.171.2353.9	149	96.222.1034.1	73	96.222.6000.1	72
96.172.0053.0	141	96.222.1037.4	73	96.222.6002.4	72
96.172.0053.1	141	96.222.1038.4	73	96.222.6003.1	73
96.172.0053.6	141	96.222.1092.4	72	96.222.6004.1	73
96.172.0053.9	141	96.222.1092.8	72	96.222.6007.4	73
96.172.0153.0	141	96.222.1097.4	73	96.222.6008.4	73
96.172.0153.1	141	96.222.1097.8	73	96.222.6030.1	72
96.172.0153.6	141	96.222.1098.4	73	96.222.6032.4	72
96.172.0153.9	141	96.222.1098.8	73	96.222.6033.1	73
96.172.0553.0	142	96.222.2000.1	72	96.222.6034.1	73
96.172.0553.1	142	96.222.2002.4	72	96.222.6037.4	73
96.172.0553.6	142	96.222.2003.1	73	96.222.6038.4	73
96.172.0553.9	142	96.222.2004.1	73	96.222.6092.4	72
96.172.0853.0	141	96.222.2007.4	73	96.222.6092.8	72
96.172.0853.1	141	96.222.2008.4	73	96.222.6097.4	73
96.172.0853.6	141	96.222.2030.1	72	96.222.6097.8	73
96.172.0853.9	141	96.222.2032.4	72	96.222.6098.4	73
96.172.2053.0	145	96.222.2033.1	73	96.222.6098.8	73
96.172.2053.1	145	96.222.2034.1	73	96.222.7000.1	72
96.172.2053.6	145	96.222.2037.4	73	96.222.7002.4	72
96.172.2053.9	145	96.222.2038.4	73	96.222.7003.1	73
96.172.2153.0	143	96.222.2092.4	72	96.222.7004.1	73
96.172.2153.1	143	96.222.2092.8	72	96.222.7007.4	73
96.172.2153.6	143	96.222.2097.4	73	96.222.7008.4	73
96.172.2153.9	143	96.222.2097.8	73	96.222.7030.1	72
96.172.2253.0	147	96.222.2098.4	73	96.222.7032.4	72
96.172.2253.1	147	96.222.2098.8	73	96.222.7033.1	73
96.172.2253.6	147	96.222.3000.1	72	96.222.7034.1	73
96.172.2253.9	147	96.222.3002.4	72	96.222.7037.4	73
96.172.2353.1	149	96.222.3003.1	73	96.222.7038.4	73
96.172.2353.6	149	96.222.3004.1	73	96.222.7092.4	72
96.172.2353.9	149	96.222.3007.4	73	96.222.7092.8	72
96.173.0053.0	142	96.222.3008.4	73	96.222.7097.4	73
96.173.0053.1	142	96.222.3030.1	72	96.222.7097.8	73
96.173.0053.6	142	96.222.3032.4	72	96.222.7098.4	73
96.173.0053.9	142	96.222.3033.1	73	96.222.7098.8	73
96.173.0153.0	142	96.222.3034.1	73	96.222.8000.1	72

INDEX

PART NUMBER | PAGE

96.222.8002.4	72	96.232.10D5.7	91	96.232.4054.1	92
96.222.8003.1	73	96.232.10D6.7	92	96.232.5000.1	90
96.222.8004.1	73	96.232.20B0.1	90	96.232.5001.7	90
96.222.8007.4	73	96.232.20B1.7	90	96.232.5003.1	91
96.222.8008.4	73	96.232.20B3.1	91	96.232.5004.1	92
96.222.8030.1	72	96.232.20B4.1	92	96.232.5005.7	91
96.222.8032.4	72	96.232.20B5.7	91	96.232.5006.7	92
96.222.8033.1	73	96.232.20B6.7	92	96.232.5030.1	90
96.222.8034.1	73	96.232.20C0.1	90	96.232.5031.7	90
96.222.8037.4	73	96.232.20C1.7	90	96.232.5033.1	91
96.222.8038.4	73	96.232.20C3.1	91	96.232.5034.1	92
96.222.8092.4	72	96.232.20C4.1	92	96.232.5035.7	91
96.222.8092.8	72	96.232.20C5.7	91	96.232.5036.7	92
96.222.8097.4	73	96.232.20C6.7	92	96.232.5050.1	90
96.222.8097.8	73	96.232.20D0.1	90	96.232.5053.1	91
96.222.8098.4	73	96.232.20D1.7	90	96.232.5054.1	92
96.222.8098.8	73	96.232.20D3.1	91	96.232.6000.1	90
96.223.1092.4	75	96.232.20D4.1	92	96.232.6001.7	90
96.223.1092.8	75	96.232.20D5.7	91	96.232.6003.1	91
96.223.1097.4	75	96.232.20D6.7	92	96.232.6004.1	92
96.223.1097.8	75	96.232.30B0.1	90	96.232.6005.7	91
96.223.1098.4	76	96.232.40B0.1	90	96.232.6006.7	92
96.223.1098.8	76	96.232.50B0.1	90	96.232.6030.1	90
96.223.2092.4	75	96.232.1000.1	90	96.232.6031.7	90
96.223.2092.8	75	96.232.1001.7	90	96.232.6033.1	91
96.223.2097.4	75	96.232.1003.1	91	96.232.6034.1	92
96.223.2097.8	75	96.232.1004.1	92	96.232.6035.7	91
96.223.2098.4	76	96.232.1005.7	91	96.232.6036.7	92
96.223.2098.8	76	96.232.1006.7	92	96.232.6050.1	90
96.223.3092.4	75	96.232.1030.1	90	96.232.6053.1	91
96.223.3092.8	75	96.232.1031.7	90	96.232.6054.1	92
96.223.3097.4	75	96.232.1033.1	91	96.232.7000.1	90
96.223.3097.8	75	96.232.1034.1	92	96.232.7001.7	90
96.223.3098.4	76	96.232.1035.7	91	96.232.7003.1	91
96.223.3098.8	76	96.232.1036.7	92	96.232.7004.1	92
96.223.4092.4	75	96.232.1050.1	90	96.232.7005.7	91
96.223.4092.8	75	96.232.1053.1	91	96.232.7006.7	92
96.223.4097.4	75	96.232.1054.1	92	96.232.7030.1	90
96.223.4097.8	75	96.232.2000.1	90	96.232.7031.7	90
96.223.4098.4	76	96.232.2001.7	90	96.232.7033.1	91
96.223.4098.8	76	96.232.2003.1	91	96.232.7034.1	92
96.223.5092.4	75	96.232.2004.1	92	96.232.7035.7	91
96.223.5092.8	75	96.232.2005.7	91	96.232.7036.7	92
96.223.5097.4	75	96.232.2006.7	92	96.232.7050.1	90
96.223.5097.8	75	96.232.2030.1	90	96.232.7053.1	91
96.223.5098.4	76	96.232.2031.7	90	96.232.7054.1	92
96.223.5098.8	76	96.232.2033.1	91	96.232.8000.1	90
96.223.6092.4	75	96.232.2034.1	92	96.232.8001.7	90
96.223.6092.8	75	96.232.2035.7	91	96.232.8003.1	91
96.223.6097.4	75	96.232.2036.7	92	96.232.8004.1	92
96.223.6097.8	75	96.232.2050.1	90	96.232.8005.7	91
96.223.6098.4	76	96.232.2053.1	91	96.232.8006.7	92
96.223.6098.8	76	96.232.2054.1	92	96.232.8030.1	90
96.223.7092.4	75	96.232.3000.1	90	96.232.8031.7	90
96.223.7092.8	75	96.232.3001.7	90	96.232.8033.1	91
96.223.7097.4	75	96.232.3003.1	91	96.232.8034.1	92
96.223.7097.8	75	96.232.3004.1	92	96.232.8035.7	91
96.223.7098.4	76	96.232.3005.7	91	96.232.8036.7	92
96.223.7098.8	76	96.232.3006.7	92	96.232.8050.1	90
96.223.8092.4	75	96.232.3030.1	90	96.232.8053.1	91
96.223.8092.8	75	96.232.3031.7	90	96.232.8054.1	92
96.223.8097.4	75	96.232.3033.1	91	96.233.10B0.1	95
96.223.8097.8	75	96.232.3034.1	92	96.233.10B1.7	95
96.223.8098.4	76	96.232.3036.7	92	96.233.10B3.1	96
96.223.8098.8	76	96.232.3050.1	90	96.233.10B4.1	97
96.232.10B0.1	90	96.232.3053.1	91	96.233.10B5.7	96
96.232.10B1.7	90	96.232.3054.1	92	96.233.10B6.7	97
96.232.10B3.1	91	96.232.4000.1	90	96.233.10C0.1	95
96.232.10B4.1	92	96.232.4001.7	90	96.233.10C1.7	95
96.232.10B5.7	91	96.232.4003.1	91	96.233.10C3.1	96
96.232.10B6.7	92	96.232.4004.1	92	96.233.10C4.1	97
96.232.10C0.1	90	96.232.4005.7	91	96.233.10C5.7	96
96.232.10C1.7	90	96.232.4006.7	92	96.233.10C6.7	97
96.232.10C3.1	91	96.232.4030.1	90	96.233.10D0.1	95
96.232.10C4.1	92	96.232.4031.7	90	96.233.10D1.7	95
96.232.10C5.7	91	96.232.4033.1	91	96.233.10D3.1	96
96.232.10C6.7	92	96.232.4034.1	92	96.233.10D4.1	97
96.232.10D0.1	90	96.232.4035.7	91	96.233.10D5.7	96
96.232.10D1.7	90	96.232.4036.7	92	96.233.10D6.7	97
96.232.10D3.1	91	96.232.4050.1	90	96.233.20B0.1	95
96.232.10D4.1	92	96.232.4053.1	91	96.233.20B1.7	95



INDEX

PART NUMBER | PAGE

96.233.20B3.1	96	96.233.5005.7	96	96.442.5033.1	105
96.233.20B4.1	97	96.233.5006.7	97	96.442.5034.1	106
96.233.20B5.7	96	96.233.5030.1	95	96.442.6000.1	105
96.233.20B6.7	97	96.233.5031.7	95	96.442.6003.1	105
96.233.20C0.1	95	96.233.5033.1	96	96.442.6004.1	106
96.233.20C1.7	95	96.233.5034.1	97	96.442.6030.1	105
96.233.20C3.1	96	96.233.5035.7	96	96.442.6033.1	105
96.233.20C4.1	97	96.233.5036.7	97	96.442.6034.1	106
96.233.20C5.7	96	96.233.5060.1	95	96.442.7000.1	105
96.233.20C6.7	97	96.233.5063.1	96	96.442.7003.1	105
96.233.20D0.1	95	96.233.5064.1	97	96.442.7004.1	106
96.233.20D1.7	95	96.233.6000.1	95	96.442.7030.1	105
96.233.20D3.1	96	96.233.6001.7	95	96.442.7033.1	105
96.233.20D4.1	97	96.233.6003.1	96	96.442.7034.1	106
96.233.20D5.7	96	96.233.6004.1	97	96.442.8000.1	105
96.233.20D6.7	97	96.233.6005.7	96	96.442.8003.1	105
96.233.30B0.1	95	96.233.6006.7	97	96.442.8004.1	106
96.233.50D0.1	95	96.233.6030.1	95	96.442.8030.1	105
96.233.60D0.1	95	96.233.6031.7	95	96.442.8033.1	105
96.233.1000.1	95	96.233.6033.1	96	96.442.8034.1	106
96.233.1001.7	95	96.233.6034.1	97	96.443.1000.1	107
96.233.1003.1	96	96.233.6035.7	96	96.443.1003.1	107
96.233.1004.1	97	96.233.6036.7	97	96.443.1004.1	108
96.233.1005.7	96	96.233.6060.1	95	96.443.1030.1	107
96.233.1006.7	97	96.233.6063.1	96	96.443.1033.1	107
96.233.1030.1	95	96.233.7000.1	95	96.443.1034.1	108
96.233.1031.7	95	96.233.7001.7	95	96.443.2000.1	107
96.233.1033.1	96	96.233.7003.1	96	96.443.2003.1	107
96.233.1034.1	97	96.233.7004.1	97	96.443.2004.1	108
96.233.1035.7	96	96.233.7005.7	96	96.443.2030.1	107
96.233.1036.7	97	96.233.7006.7	97	96.443.2033.1	107
96.233.1060.1	95	96.233.7030.1	95	96.443.2034.1	108
96.233.1063.1	96	96.233.7031.7	95	96.443.3000.1	107
96.233.1064.1	97	96.233.7033.1	96	96.443.3003.1	107
96.233.2000.1	95	96.233.7034.1	97	96.443.3004.1	108
96.233.2001.7	95	96.233.7035.7	96	96.443.3030.1	107
96.233.2003.1	96	96.233.7036.7	97	96.443.3033.1	107
96.233.2004.1	97	96.233.7060.1	95	96.443.3034.1	108
96.233.2005.7	96	96.233.7063.1	96	96.443.4000.1	107
96.233.2006.7	97	96.233.8000.1	95	96.443.4003.1	107
96.233.2030.1	95	96.233.8001.7	95	96.443.4004.1	108
96.233.2031.7	95	96.233.8003.1	96	96.443.4030.1	107
96.233.2033.1	96	96.233.8004.1	97	96.443.4033.1	107
96.233.2034.1	97	96.233.8005.7	96	96.443.4034.1	108
96.233.2035.7	96	96.233.8006.7	97	96.443.5000.1	107
96.233.2036.7	97	96.233.8030.1	95	96.443.5003.1	107
96.233.2060.1	95	96.233.8031.7	95	96.443.5004.1	108
96.233.2063.1	96	96.233.8033.1	96	96.443.5030.1	107
96.233.3000.1	95	96.233.8034.1	97	96.443.5033.1	107
96.233.3001.7	95	96.233.8035.7	96	96.443.5034.1	108
96.233.3003.1	96	96.233.8036.7	97	96.443.6000.1	107
96.233.3004.1	97	96.233.8060.1	95	96.443.6003.1	107
96.233.3005.7	96	96.233.8063.1	96	96.443.6004.1	108
96.233.3006.7	97	96.442.1000.1	105	96.443.6030.1	107
96.233.3030.1	95	96.442.1003.1	105	96.443.6033.1	107
96.233.3031.7	95	96.442.1004.1	106	96.443.6034.1	108
96.233.3033.1	96	96.442.1030.1	105	96.443.7000.1	107
96.233.3034.1	97	96.442.1033.1	105	96.443.7003.1	107
96.233.3035.7	96	96.442.1034.1	106	96.443.7004.1	108
96.233.3036.7	97	96.442.2000.1	105	96.443.7030.1	107
96.233.3060.1	95	96.442.2003.1	105	96.443.7033.1	107
96.233.3063.1	96	96.442.2004.1	106	96.443.7034.1	108
96.233.3064.1	97	96.442.2030.1	105	96.443.8000.1	107
96.233.4000.1	95	96.442.2033.1	105	96.443.8003.1	107
96.233.4001.7	95	96.442.2034.1	106	96.443.8004.1	108
96.233.4003.1	96	96.442.3000.1	105	96.443.8030.1	107
96.233.4004.1	97	96.442.3003.1	105	96.443.8033.1	107
96.233.4005.7	96	96.442.3004.1	106	96.443.8034.1	108
96.233.4006.7	97	96.442.3030.1	105	96.452.10B0.1	117
96.233.4030.1	95	96.442.3033.1	105	96.452.10B0.6	117
96.233.4031.7	95	96.442.3034.1	106	96.452.10B3.1	118
96.233.4033.1	96	96.442.4000.1	105	96.452.10B3.6	118
96.233.4034.1	97	96.442.4003.1	105	96.452.10B4.1	119
96.233.4035.7	96	96.442.4004.1	106	96.452.10B4.6	119
96.233.4036.7	97	96.442.4030.1	105	96.452.10C0.1	117
96.233.4060.1	95	96.442.4033.1	105	96.452.10C0.6	117
96.233.4063.1	96	96.442.4034.1	106	96.452.10C3.1	118
96.233.5000.1	95	96.442.5000.1	105	96.452.10C3.6	118
96.233.5001.7	95	96.442.5003.1	105	96.452.10C4.1	119
96.233.5003.1	96	96.442.5004.1	106	96.452.10C4.6	119
96.233.5004.1	97	96.442.5030.1	105	96.452.20B0.1	117

INDEX

PART NUMBER | PAGE

96.452.20B0.6	117	96.452.1003.1	118	96.452.6033.1	118
96.452.20B3.1	118	96.452.1003.6	118	96.452.6033.6	118
96.452.20B3.6	118	96.452.1004.1	119	96.452.6034.1	119
96.452.20B4.1	119	96.452.1004.6	119	96.452.6034.6	119
96.452.20B4.6	119	96.452.1030.1	117	96.452.6050.1	117
96.452.20C0.1	117	96.452.1030.6	117	96.452.6053.1	118
96.452.20C0.6	117	96.452.1033.1	118	96.452.6054.1	119
96.452.20C3.1	118	96.452.1033.6	118	96.452.7000.1	117
96.452.20C3.6	118	96.452.1034.1	119	96.452.7000.6	117
96.452.20C4.1	119	96.452.1034.6	119	96.452.7003.1	118
96.452.20C4.6	119	96.452.1050.1	117	96.452.7003.6	118
96.452.30B0.1	117	96.452.1053.1	118	96.452.7004.1	119
96.452.30B0.6	117	96.452.1054.1	119	96.452.7004.6	119
96.452.30B3.1	118	96.452.2000.1	117	96.452.7030.1	117
96.452.30B3.6	118	96.452.2000.6	117	96.452.7030.6	117
96.452.30B4.1	119	96.452.2003.1	118	96.452.7033.1	118
96.452.30B4.6	119	96.452.2003.6	118	96.452.7033.6	118
96.452.30C0.1	117	96.452.2004.1	119	96.452.7034.1	119
96.452.30C0.6	117	96.452.2004.6	119	96.452.7034.6	119
96.452.30C3.1	118	96.452.2030.1	117	96.452.7050.1	117
96.452.30C3.6	118	96.452.2030.6	117	96.452.7053.1	118
96.452.30C4.1	119	96.452.2033.1	118	96.452.7054.1	119
96.452.30C4.6	119	96.452.2033.6	118	96.452.8000.1	117
96.452.40B0.1	117	96.452.2034.1	119	96.452.8000.6	117
96.452.40B0.6	117	96.452.2034.6	119	96.452.8003.1	118
96.452.40B3.1	118	96.452.2050.1	117	96.452.8003.6	118
96.452.40B3.6	118	96.452.2053.1	118	96.452.8004.1	119
96.452.40B4.1	119	96.452.2054.1	119	96.452.8004.6	119
96.452.40B4.6	119	96.452.3000.1	117	96.452.8030.1	117
96.452.40C0.1	117	96.452.3000.6	117	96.452.8030.6	117
96.452.40C0.6	117	96.452.3003.1	118	96.452.8033.1	118
96.452.40C3.1	118	96.452.3003.6	118	96.452.8033.6	118
96.452.40C3.6	118	96.452.3004.1	119	96.452.8034.1	119
96.452.40C4.1	119	96.452.3004.6	119	96.452.8034.6	119
96.452.40C4.6	119	96.452.3030.1	117	96.452.8050.1	117
96.452.50B0.1	117	96.452.3030.6	117	96.452.8053.1	118
96.452.50B0.6	117	96.452.3033.1	118	96.452.8054.1	119
96.452.50B3.1	118	96.452.3033.6	118	96.453.10B0.1	120
96.452.50B3.6	118	96.452.3034.1	119	96.453.10B0.6	120
96.452.50B4.1	119	96.452.3034.6	119	96.453.10B3.1	121
96.452.50B4.6	119	96.452.3050.1	117	96.453.10B3.6	121
96.452.50C0.1	117	96.452.3053.1	118	96.453.10B4.1	122
96.452.50C0.6	117	96.452.3054.1	119	96.453.10B4.6	122
96.452.50C3.1	118	96.452.4000.1	117	96.453.10C0.1	120
96.452.50C3.6	118	96.452.4000.6	117	96.453.10C0.6	120
96.452.50C4.1	119	96.452.4003.1	118	96.453.10C3.1	121
96.452.50C4.6	119	96.452.4003.6	118	96.453.10C3.6	121
96.452.60B0.1	117	96.452.4004.1	119	96.453.10C4.1	122
96.452.60B0.6	117	96.452.4004.6	119	96.453.10C4.6	122
96.452.60B3.1	118	96.452.4030.1	117	96.453.10D0.1	120
96.452.60B3.6	118	96.452.4030.6	117	96.453.10D0.6	120
96.452.60B4.1	119	96.452.4033.1	118	96.453.10D3.1	121
96.452.60C0.1	117	96.452.4033.6	118	96.453.10D3.6	121
96.452.60C0.6	117	96.452.4034.1	119	96.453.10D4.1	122
96.452.60C3.1	118	96.452.4034.6	119	96.453.10D4.6	122
96.452.60C3.6	118	96.452.4050.1	117	96.453.20B0.1	120
96.452.60C4.1	119	96.452.4053.1	118	96.453.20B0.6	120
96.452.70B0.1	117	96.452.4054.1	119	96.453.20B3.1	121
96.452.70B0.6	117	96.452.5000.1	117	96.453.20B3.6	121
96.452.70B3.1	118	96.452.5000.6	117	96.453.20B4.1	122
96.452.70B3.6	118	96.452.5003.1	118	96.453.20B4.6	122
96.452.70B4.1	119	96.452.5003.6	118	96.453.20C0.1	120
96.452.70B4.6	119	96.452.5004.1	119	96.453.20C0.6	120
96.452.70C0.1	117	96.452.5004.6	119	96.453.20C3.1	121
96.452.70C0.6	117	96.452.5030.1	117	96.453.20C3.6	121
96.452.70C3.1	118	96.452.5030.6	117	96.453.20C4.1	122
96.452.70C3.6	118	96.452.5033.1	118	96.453.20C4.6	122
96.452.70C4.1	119	96.452.5033.6	118	96.453.20D0.1	120
96.452.70C4.6	119	96.452.5034.1	119	96.453.20D0.6	120
96.452.80B0.1	117	96.452.5034.6	119	96.453.20D3.1	121
96.452.80B0.6	117	96.452.5050.1	117	96.453.20D3.6	121
96.452.80B3.1	118	96.452.5053.1	118	96.453.20D4.1	122
96.452.80B4.1	119	96.452.5054.1	119	96.453.20D4.6	122
96.452.80B4.6	119	96.452.6000.1	117	96.453.30B0.1	120
96.452.80C0.1	117	96.452.6000.6	117	96.453.30B0.6	120
96.452.80C0.6	117	96.452.6003.1	118	96.453.30B3.1	121
96.452.80C3.1	118	96.452.6003.6	118	96.453.30B3.6	121
96.452.80C4.1	119	96.452.6004.1	119	96.453.30B4.1	122
96.452.80C4.6	119	96.452.6004.6	119	96.453.30B4.6	122
96.452.1000.1	117	96.452.6030.1	117	96.453.30C0.1	120
96.452.1000.6	117	96.452.6030.6	117	96.453.30C0.6	120



INDEX

PART NUMBER | PAGE

96.453.30C3.1	121	96.453.80C3.6	121	96.453.5054.1	122
96.453.30C3.6	121	96.453.80C4.1	122	96.453.6000.1	120
96.453.30C4.1	122	96.453.80D0.1	122	96.453.6000.6	120
96.453.30C4.6	122	96.453.80D0.6	120	96.453.6003.1	121
96.453.30D0.1	120	96.453.80D3.1	121	96.453.6003.6	121
96.453.30D0.6	120	96.453.80D3.6	121	96.453.6004.1	122
96.453.30D3.1	121	96.453.80D4.1	122	96.453.6004.6	122
96.453.30D3.6	121	96.453.1000.1	120	96.453.6030.1	120
96.453.30D4.1	122	96.453.1000.6	120	96.453.6030.6	120
96.453.30D4.6	122	96.453.1003.1	121	96.453.6033.1	121
96.453.40B0.1	120	96.453.1003.6	121	96.453.6033.6	121
96.453.40B0.6	120	96.453.1004.1	122	96.453.6034.1	122
96.453.40B3.1	121	96.453.1004.6	122	96.453.6034.6	122
96.453.40B3.6	121	96.453.1030.1	120	96.453.6050.1	120
96.453.40B4.1	122	96.453.1030.6	120	96.453.6053.1	121
96.453.40B4.6	122	96.453.1033.1	121	96.453.6054.1	122
96.453.40C0.1	120	96.453.1033.6	121	96.453.7000.1	120
96.453.40C0.6	120	96.453.1034.1	122	96.453.7000.6	120
96.453.40C3.1	121	96.453.1034.6	122	96.453.7003.1	121
96.453.40C3.6	121	96.453.1050.1	120	96.453.7003.6	121
96.453.40C4.1	122	96.453.1053.1	121	96.453.7004.1	122
96.453.40C4.6	122	96.453.1054.1	122	96.453.7004.6	122
96.453.40D0.1	120	96.453.2000.1	120	96.453.7030.1	120
96.453.40D0.6	120	96.453.2000.6	120	96.453.7030.6	120
96.453.40D3.1	121	96.453.2003.1	121	96.453.7033.1	121
96.453.40D3.6	121	96.453.2003.6	121	96.453.7033.6	121
96.453.40D4.1	122	96.453.2004.1	122	96.453.7034.1	122
96.453.40D4.6	122	96.453.2004.6	122	96.453.7034.6	122
96.453.50B0.1	120	96.453.2030.1	120	96.453.7050.1	120
96.453.50B0.6	120	96.453.2030.6	120	96.453.7053.1	121
96.453.50B3.1	121	96.453.2033.1	121	96.453.7054.1	122
96.453.50B3.6	121	96.453.2033.6	121	96.453.8000.1	120
96.453.50B4.1	122	96.453.2034.1	122	96.453.8000.6	120
96.453.50B4.6	122	96.453.2034.6	122	96.453.8003.1	121
96.453.50C0.1	120	96.453.2050.1	120	96.453.8003.6	121
96.453.50C0.6	120	96.453.2053.1	121	96.453.8004.1	122
96.453.50C3.1	121	96.453.2054.1	122	96.453.8004.6	122
96.453.50C3.6	121	96.453.3000.1	120	96.453.8030.1	120
96.453.50C4.1	122	96.453.3000.6	120	96.453.8030.6	120
96.453.50C4.6	122	96.453.3003.1	121	96.453.8033.1	121
96.453.50D0.1	120	96.453.3003.6	121	96.453.8033.6	121
96.453.50D0.6	120	96.453.3004.1	122	96.453.8034.1	122
96.453.50D3.1	121	96.453.3004.6	122	96.453.8034.6	122
96.453.50D3.6	121	96.453.3030.1	120	96.453.8050.1	120
96.453.50D4.1	122	96.453.3030.6	120	96.453.8053.1	121
96.453.50D4.6	122	96.453.3033.1	121	96.453.8054.1	122
96.453.60B0.1	120	96.453.3033.6	121	96.454.1000.1	123
96.453.60B0.6	120	96.453.3034.1	122	96.454.1000.6	123
96.453.60B3.1	121	96.453.3034.6	122	96.454.1003.1	123
96.453.60B3.6	121	96.453.3050.1	120	96.454.1003.6	123
96.453.60B4.1	122	96.453.3053.1	121	96.454.1004.1	124
96.453.60C0.1	120	96.453.3054.1	122	96.454.1004.6	124
96.453.60C0.6	120	96.453.4000.1	120	96.454.1030.1	123
96.453.60C3.1	121	96.453.4000.6	120	96.454.1030.6	123
96.453.60C3.6	121	96.453.4003.1	121	96.454.1033.1	123
96.453.60C4.1	122	96.453.4003.6	121	96.454.1033.6	123
96.453.60D0.1	120	96.453.4004.1	122	96.454.1034.1	124
96.453.60D0.6	120	96.453.4004.6	122	96.454.1034.6	124
96.453.60D3.1	121	96.453.4030.1	120	96.454.2000.1	123
96.453.60D3.6	121	96.453.4030.6	120	96.454.2000.6	123
96.453.60D4.1	122	96.453.4033.1	121	96.454.2003.1	123
96.453.70B0.1	120	96.453.4033.6	121	96.454.2003.6	123
96.453.70B0.6	120	96.453.4034.1	122	96.454.2004.1	124
96.453.70B3.1	121	96.453.4034.6	122	96.454.2004.6	124
96.453.70B4.1	122	96.453.4050.1	120	96.454.2030.1	123
96.453.70C0.1	120	96.453.4053.1	121	96.454.2030.6	123
96.453.70C0.6	120	96.453.4054.1	122	96.454.2033.1	123
96.453.70C3.1	121	96.453.5000.1	120	96.454.2033.6	123
96.453.70C4.1	122	96.453.5000.6	120	96.454.2034.1	124
96.453.70D0.1	120	96.453.5003.1	121	96.454.2034.6	124
96.453.70D0.6	120	96.453.5003.6	121	96.454.3000.1	123
96.453.70D3.1	121	96.453.5004.1	122	96.454.3000.6	123
96.453.70D4.1	122	96.453.5004.6	122	96.454.3003.1	123
96.453.80B0.1	120	96.453.5030.1	120	96.454.3003.6	123
96.453.80B0.6	120	96.453.5030.6	120	96.454.3004.1	124
96.453.80B3.1	121	96.453.5033.1	121	96.454.3004.6	124
96.453.80B3.6	121	96.453.5033.6	121	96.454.3030.1	123
96.453.80B4.1	122	96.453.5034.1	122	96.454.3030.6	123
96.453.80C0.1	120	96.453.5034.6	122	96.454.3033.1	123
96.453.80C0.6	120	96.453.5050.1	120	96.454.3033.6	123
96.453.80C3.1	121	96.453.5053.1	121	96.454.3034.1	124

INDEX

PART NUMBER | PAGE

96.454.3034.6	124	96.834.4003.3	154	99.578.0000.7	160
96.454.4000.1	123	96.834.4004.3	155	99.584.0000.7*	157
96.454.4000.6	123	96.834.4030.3	154	99.585.0000.7*	157
96.454.4003.1	123	96.834.4033.3	154	99.589.0000.7	165
96.454.4003.6	123	96.834.4034.3	155	99.591.0000.7	165
96.454.4004.1	124	96.854.1000.3	161	99.592.0000.7	64
96.454.4004.6	124	96.854.1003.3	161	99.593.0000.7	64
96.454.4030.1	123	96.854.1004.3	162	99.594.0000.7	78
96.454.4030.6	123	96.854.1030.3	161	99.606.0000.8	89
96.454.4033.1	123	96.854.1033.3	161	99.628.0000.0	198
96.454.4033.6	123	96.854.1034.3	162	99.663.0000.0	170
96.454.4034.1	124	96.854.2000.3	161	99.664.0000.0	170
96.454.4034.6	124	96.854.2003.3	161	99.675.0000.0	59
96.454.5000.1	123	96.854.2004.3	162	99.688.0000.0	60
96.454.5000.6	123	96.854.2030.3	161	99.700.0000.8	41
96.454.5003.1	123	96.854.2033.3	161	99.701.0000.8	41
96.454.5003.6	123	96.854.2034.3	162	99.705.0000.8	41
96.454.5004.1	124	96.854.3000.3	161	99.706.0000.8	41
96.454.5004.6	124	96.854.3003.3	161	99.707.0000.8	41
96.454.5030.1	123	96.854.3004.3	162	99.708.0000.8	41
96.454.5030.6	123	96.854.3030.3	161	99.709.0000.8	41
96.454.5033.1	123	96.854.3033.3	161	99.710.0000.8	41
96.454.5033.6	123	96.854.3034.3	162	99.712.0000.7	93
96.454.5034.1	124	96.854.4000.3	161	99.713.0000.7	93
96.454.5034.6	124	96.854.4003.3	161	99.714.0000.7	93
96.454.6000.1	123	96.854.4004.3	162	99.715.0000.7	93
96.454.6000.6	123	96.854.4030.3	161	99.716.0000.7	93
96.454.6003.1	123	96.854.4033.3	161	99.717.0000.7	93
96.454.6003.6	123	96.854.4034.3	162	99.718.0000.7	93
96.454.6004.1	124	97.041.4053.1	194	99.719.0000.7	93
96.454.6004.6	124	97.041.4253.1	194	99.902.0000.7	116
96.454.6030.1	123	97.041.5053.1	195	99.906.0000.7	89
96.454.6030.6	123	97.041.5553.1	195	99.910.0000.7	71
96.454.6033.1	123	97.042.4053.1	194	99.911.0000.7	104
96.454.6033.6	123	97.042.4253.1	194	99.929.0000.7	89
96.454.6034.1	124	97.042.5053.1	195	99.946.0000.7	71
96.454.6034.6	124	97.042.5553.1	195	99.988.0000.7	71
96.454.7000.1	123	97.051.4053.1	196	X6.021.0050.8*	175
96.454.7000.6	123	97.051.4253.1	196	X6.021.0051.4*	175
96.454.7003.1	123	97.051.5053.1	197	X6.021.0053.0*	175
96.454.7003.6	123	97.051.5553.1	197	X6.021.0053.1*	175
96.454.7004.1	124	97.052.4053.1	196	X6.021.0150.8*	175
96.454.7004.6	124	97.052.4253.1	196	X6.021.0151.4*	175
96.454.7030.1	123	97.052.5053.1	197	X6.021.0153.0*	175
96.454.7030.6	123	97.052.5553.1	197	X6.021.0153.1*	175
96.454.7033.1	123	99.000.9950.6	165	X6.021.1051.4*	177
96.454.7033.6	123	99.400.9999.7	169	X6.021.1053.0*	177
96.454.7034.1	124	99.404.9999.7	169	X6.021.1053.1*	177
96.454.7034.6	124	99.413.6205.2	164	X6.021.2051.4*	176
96.454.8000.1	123	99.414.6205.2	164	X6.021.2053.0*	176
96.454.8000.6	123	99.415.6205.2	164	X6.021.2053.1*	176
96.454.8003.1	123	99.416.6205.2	164	X6.021.4050.8	174
96.454.8003.6	123	99.429.0000.0	170	X6.021.4051.4	174
96.454.8004.1	124	99.430.0000.0	170	X6.021.4053.0	174
96.454.8004.6	124	99.431.0000.0	169	X6.021.4053.1	174
96.454.8030.1	123	99.436.0000.1	22	X6.021.4150.8	174
96.454.8030.6	123	99.438.0000.1	59	X6.021.4151.4	174
96.454.8033.1	123	99.439.0000.1	170	X6.021.4153.0	174
96.454.8033.6	123	99.441.0000.1	59	X6.021.4153.1	174
96.454.8034.1	124	99.506.0000.7	74	X6.021.4250.8	174
96.454.8034.6	124	99.507.0000.7	74	X6.021.4251.4	174
96.834.1000.3	154	99.508.0000.7	74	X6.021.4253.0	174
96.834.1003.3	154	99.511.0000.7	74	X6.021.4253.1	174
96.834.1004.3	155	99.513.0000.7	94	X6.021.4350.8	174
96.834.1030.3	154	99.514.0000.7	94	X6.021.4351.4	174
96.834.1033.3	154	99.515.0000.7	94	X6.021.4353.0	174
96.834.1034.3	155	99.516.0000.7	94	X6.021.4353.1	174
96.834.2000.3	154	99.517.0000.7	94	X6.021.5051.4	177
96.834.2003.3	154	99.518.0000.7	94	X6.021.5053.0	177
96.834.2004.3	155	99.529.0000.7	164	X6.021.5053.1	177
96.834.2030.3	154	99.530.0000.7	164	X6.021.6051.4	176
96.834.2033.3	154	99.531.0000.7	164	X6.021.6053.0	176
96.834.2034.3	155	99.532.0000.7	164	X6.021.6053.1	176
96.834.3000.3	154	99.533.0000.7	94	X6.022.0050.8*	175
96.834.3003.3	154	99.534.0000.7	74	X6.022.0051.4*	175
96.834.3004.3	155	99.535.0000.7	94	X6.022.0053.0*	175
96.834.3030.3	154	99.537.0000.7	169	X6.022.0053.1*	175
96.834.3033.3	154	99.575.0000.7	156	X6.022.0150.8*	175
96.834.3034.3	155	99.576.0000.7	156	X6.022.0151.4*	175
96.834.4000.3	154	99.577.0000.7	160	X6.022.0153.0*	175



INDEX

PART NUMBER | PAGE

X6.022.0153.1*	175	X6.032.1053.0*	181	X6.052.5053.0	190
X6.022.1051.4*	177	X6.032.1053.1*	181	X6.052.5053.1	190
X6.022.1053.0*	177	X6.032.1055.7*	181	X6.052.5053.6	190
X6.022.1053.1*	177	X6.032.2051.4*	180	X6.052.5053.9	190
X6.022.2051.4*	176	X6.032.2053.0*	180	X6.052.6051.4	189
X6.022.2053.0*	176	X6.032.2053.1*	180	X6.052.6053.0	189
X6.022.2053.1*	176	X6.032.2055.7*	180	X6.052.6053.1	189
X6.022.4050.8	174	X6.032.4051.4	178	X6.052.6053.6	189
X6.022.4051.4	174	X6.032.4053.0	178	X6.052.6253.6	190
X6.022.4053.0	174	X6.032.4053.1	178	X6.053.6053.1	189
X6.022.4053.1	174	X6.032.4053.9	178	Z5.564.4500.1	165
X6.022.4150.8	174	X6.032.4055.7	178	Z5.564.4553.0	164
X6.022.4151.4	174	X6.032.4151.4	178	Z5.564.4553.1	164
X6.022.4153.0	174	X6.032.4153.0	178	Z5.565.9853.0	164
X6.022.4153.1	174	X6.032.4153.1	178	Z5.565.9853.1	164
X6.022.5051.4	177	X6.032.4153.9	178	Z5.567.5653.0	198
X6.022.5053.0	177	X6.032.4155.7	178	Z5.569.5253.1	165
X6.022.5053.1	177	X6.032.4553.1	178	Z5.569.5353.1	165
X6.022.6051.4	176	X6.032.5051.4	181		
X6.022.6053.0	176	X6.032.5053.0	181		
X6.022.6053.1	176	X6.032.5053.1	181		
X6.030.0153.1	182	X6.032.5055.7	181		
X6.031.0051.4*	179	X6.032.6051.4	180		
X6.031.0053.0*	179	X6.032.6053.0	180		
X6.031.0053.1*	179	X6.032.6053.1	180		
X6.031.0053.9*	179	X6.032.6055.7	180		
X6.031.0055.7*	179	X6.033.4053.1	178		
X6.031.0151.4*	179	X6.033.6253.1	181		
X6.031.0153.0*	179	X6.034.6253.1	181		
X6.031.0153.1*	179	X6.041.4053.0	184		
X6.031.0153.9*	179	X6.041.4053.1	184		
X6.031.0155.7*	179	X6.041.4153.0	184		
X6.031.1051.4*	181	X6.041.4153.1	184		
X6.031.1053.0*	181	X6.041.5051.4	186		
X6.031.1053.1*	181	X6.041.5053.0	186		
X6.031.1055.7*	181	X6.041.5053.1	186		
X6.031.2051.4*	180	X6.041.6053.0	185		
X6.031.2053.0*	180	X6.041.6053.1	185		
X6.031.2053.1*	180	X6.042.4053.0	184		
X6.031.2055.7*	180	X6.042.4053.1	184		
X6.031.4051.4	178	X6.042.4153.0	184		
X6.031.4053.0	178	X6.042.4153.1	184		
X6.031.4053.1	178	X6.042.5051.4	186		
X6.031.4053.9	178	X6.042.5053.0	186		
X6.031.4055.7	178	X6.042.5053.1	186		
X6.031.4151.4	178	X6.042.6053.0	185		
X6.031.4153.0	178	X6.042.6053.1	185		
X6.031.4153.1	178	X6.051.4051.4	188		
X6.031.4153.9	178	X6.051.4053.0	188		
X6.031.4155.7	178	X6.051.4053.1	188		
X6.031.4251.4	178	X6.051.4053.6	188		
X6.031.4253.0	178	X6.051.4053.9	188		
X6.031.4253.1	178	X6.051.4151.4	188		
X6.031.4253.9	178	X6.051.4153.0	188		
X6.031.4255.7	178	X6.051.4153.1	188		
X6.031.4351.4	178	X6.051.4153.6	188		
X6.031.4353.0	178	X6.051.4153.9	188		
X6.031.4353.1	178	X6.051.4353.0	188		
X6.031.4353.9	178	X6.051.4553.1	188		
X6.031.4355.7	178	X6.051.5051.4	190		
X6.031.4553.1	178	X6.051.5053.0	190		
X6.031.5051.4	181	X6.051.5053.1	190		
X6.031.5053.0	181	X6.051.5053.6	190		
X6.031.5053.1	181	X6.051.5053.9	190		
X6.031.5055.7	181	X6.051.6051.4	189		
X6.031.6051.4	180	X6.051.6053.0	189		
X6.031.6053.0	180	X6.051.6053.1	189		
X6.031.6053.1	180	X6.051.6053.6	189		
X6.031.6055.7	180	X6.052.4051.4	188		
X6.032.0051.4*	179	X6.052.4053.0	188		
X6.032.0053.0*	179	X6.052.4053.1	188		
X6.032.0053.1*	179	X6.052.4053.6	188		
X6.032.0053.9*	179	X6.052.4053.9	188		
X6.032.0055.7*	179	X6.052.4151.4	188		
X6.032.0151.4*	179	X6.052.4153.0	188		
X6.032.0153.0*	179	X6.052.4153.1	188		
X6.032.0153.1*	179	X6.052.4153.6	188		
X6.032.0153.9*	179	X6.052.4153.9	188		
X6.032.0155.7*	179	X6.052.4553.1	188		
X6.032.1051.4*	181	X6.052.5051.4	190		



INFO TO GO.

All brochures from Wieland Electric are available for download on our website.

<https://www.wieland-electric.com/en/support/downloads>



Interesting for you

RST® ROUND CONNECTOR SYSTEM

Solutions + Applications
in highest IP protection class.

Part No. 0699.1



RST® MICRO

The innovative plug connector for lighting technology and industrial environments.

Part No. 0697.1



RST® INSTALLATION NOTES

Electrical installation instructions for outdoor areas.

Bestell-Nr. 0693.1



Wieland @YouTube

See our solutions
in motion

<https://www.youtube.com/user/WielandElectric>



Technical consultation

Building Solutions

Email: building@wieland-electric.com

Worldwide: <https://wie.li/contactinternational>



ONLY ONE TIP AWAY.

OUR WIELAND E-SHOP

In our online store you will find all the information about our products, prices, and technical data.

Order easily and conveniently online, and check availability.

<https://eshop.wieland-electric.com>

Scan QR code –
view products in the
E-SHOP.





wieland

HEADQUARTERS


Wieland Electric GmbH
Brennerstraße 10 – 14
96052 Bamberg · Germany

Phone +49 951 9324-0
Fax +49 951 9324-198
info@wieland-electric.com

0690.1 MC 07/25

Represented in over 70 countries worldwide:


www.wieland-electric.com

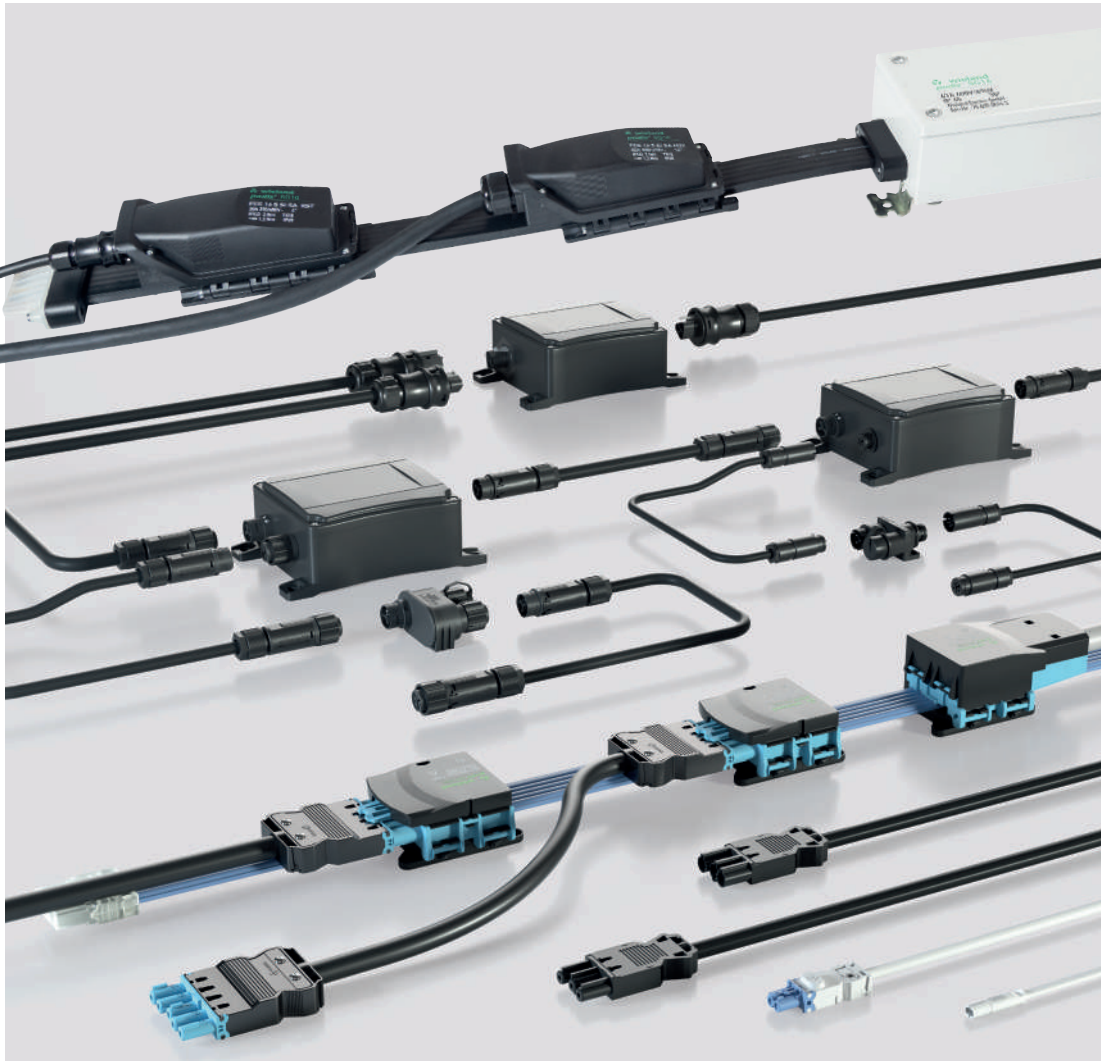

gesis® | RST® | podis® | IRVE

HELLO ESSENTIEL

L'essentiel de la connexion électrique plug & play
indoor & outdoor

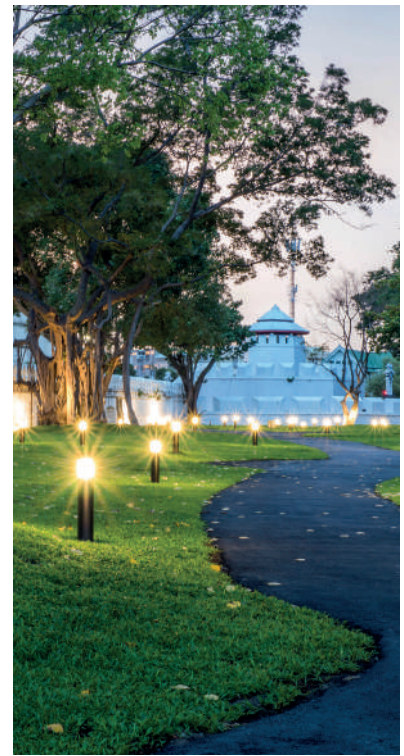

Des solutions intelligentes Plug & Play augmentent la sécurité et la flexibilité d'une part et réduisent l'investissement en termes de main d'œuvre, temps et coûts d'autre part dans de nombreuses applications, et aussi celles exigeant un besoin d'indice de protection élevé comme :

- ▶ Lieux de stockage
- ▶ Bâtiments industriels
- ▶ Espaces humides
- ▶ Serres et bâtiments agricoles (alimentation, éclairage)
- ▶ Parkings, garages
- ▶ Stations de charge électriques
- ▶ Espaces événementiels outdoor
- ▶ Éclairage public (rues, jardins, parcs)




SYSTÈMES GESIS® ET RST® EN ACTION POUR


- | | | |
|---|---|---|
| ▶ câblage d'infrastructure | ▶ automatisation décentralisée des bâtiments (KNX) | ▶ EnOcean (KNX) |
| ▶ alimentation de boîtiers au sol | ▶ commande brise soleil orientable / volet (KNX, relais, SMI) | ▶ câblage dans des constructions légères / parois mobiles |
| ▶ alimentation de chemins de câbles | ▶ FanCoil (KNX) | ▶ colonne d'installation |
| ▶ éclairage, commutation, régulation, commande (DALI) | | |

CALCUL COMPARATIF

SELON LA ZVEH KFE 2018/2019

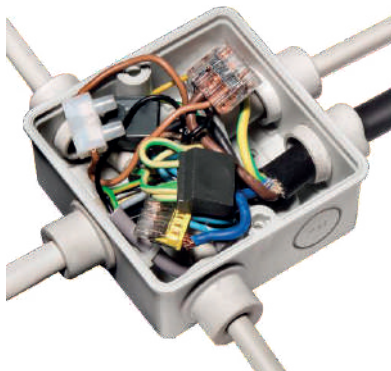

Boîte de distribution conventionnelle

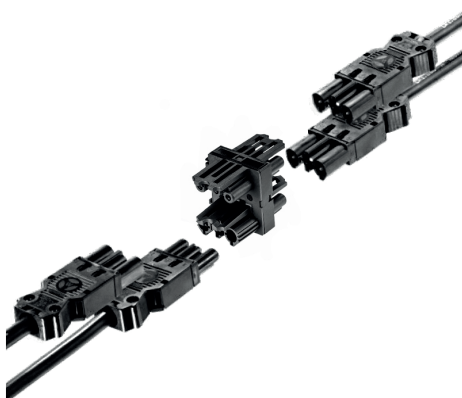


Blocs de distribution pluggables directement avec gesis® CLASSIC

AVANTAGES DE GESIS® CLASSIC

- + Blocs de distribution avec 2,3 ou 5 sorties directement pluggables
- + Les câbles sont simplement à « encliqueter » entre les blocs
- + Appareillages/luminaires commandés/livrés pré-équipés
- + 100% Fabrication de qualité industrielle
- + Maintenance des appareillages sans effort

TRADITIONNEL VS. GESIS®

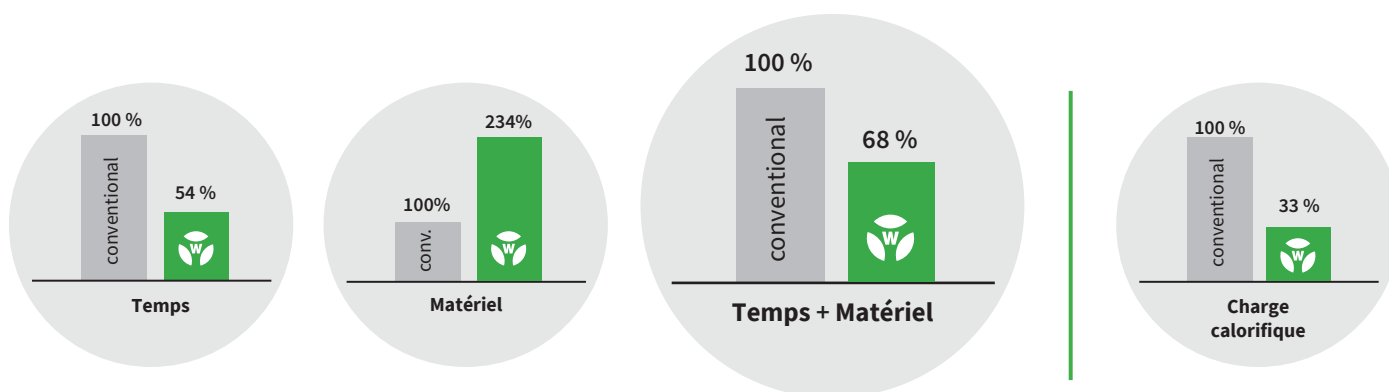

TRADITIONNEL

- + Temps : 134.2 min.
- + Matériel : 7.40€
- + Main-d'œuvre + matériel : 102.93€
- + Charge calorifique (boîte de dérivation) : 2kWh

GESIS®

- + Temps : 72.6 min.
- + Matériel : 17.34€
- + Main-d'œuvre + matériel : 70.16€
- + Charge calorifique (repartiteur en « H » + 4 cordons) : 0.67kWh

SOURCE : ZVEH KFE 2018/2019

- + 01.02 Câbles et fils
- + 03.10 Boîtes et accessoires
- + 06.01 Connection
- + 18.01 Installation plug-in

VUE D'ENSEMBLE DES SYSTÈMES D'INSTALLATION ÉLECTRIQUE DÉCENTRALISÉE.

PRODUITS SYSTÈME **podis®** IRVE + **gesis®** + **RST®**



PODIS® IRVE

Système de câble plat de raccordement électrique pour les bornes de recharge.


PAGE 6



GESIS® CLASSIC

Installation électrique enfichable pour boîtiers au sol, luminaires, etc.

PAGE 8

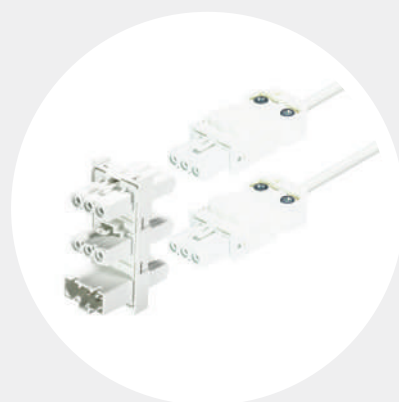

GESIS® MINI

Version à taille réduite optimisée pour les espaces confinés.


PAGE 20



GESIS® NRG

Système de câble plat flexible pour un câblage efficace de l'infrastructure.

PAGE 24

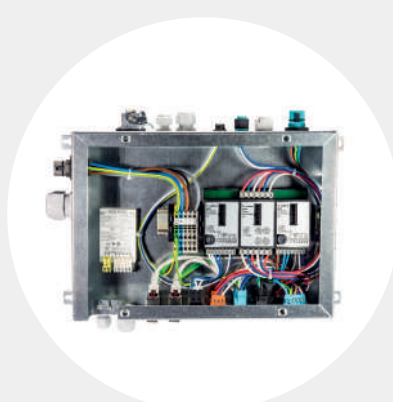

GESIS® RAN

Boîte de distribution spécifique au projet pour une installation intelligente.

PAGE 28




RST® MICRO / MINI / CLASSIC / POWER

Installation électrique avec protection IP pour l'extérieur.

PAGE 30

INNOVATION DE LA MOBILITÉ.

Le système de câble plat podis® est la solution innovante pour la distribution d'énergie décentralisée. Rapide à installer et extensible, il convient parfaitement pour adapter les bâtiments à la transition vers la mobilité et mettre en place l'infrastructure de recharge nécessaire à l'e-mobilité.

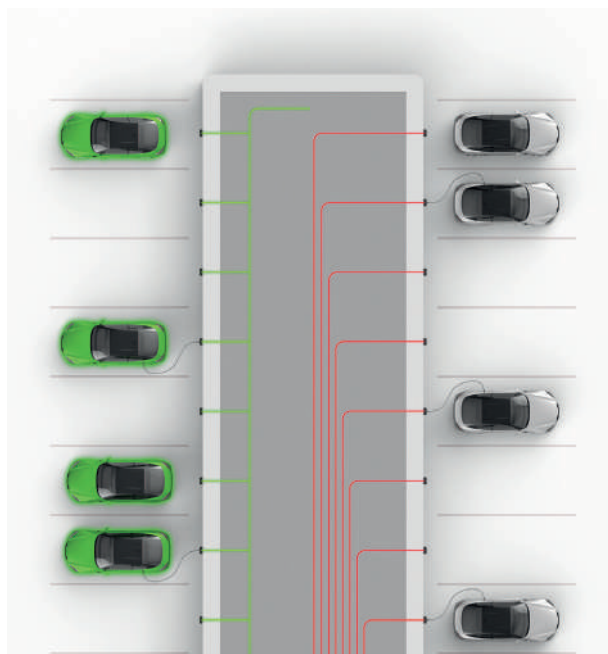

Décentralisée

Traditionnelle

INSTALLATION DÉCENTRALISÉE.

L'installation décentralisée avec podis vous permet de mettre en oeuvre la distribution d'énergie pour un parking entier avec une seule ligne d'alimentation et de placer les modules de dérivation exactement là où vous en avez besoin. Cela permet d'économiser de la place et de garantir une flexibilité et une évolutivité de votre parking.



66%

Temps gagné lors de la première installation



66%

Économies sur les matériaux

88%

Temps gagné pour les extensions

30%

Économies globales pour l'installation



Dans la gaine grillagée ou le chemin de câble



Sur le mur



Sur le plafond

Pour plus d'informations sur la mise en place d'une infrastructure de recharge avec distribution décentralisée de l'électricité, scannez le code :

PODIS®

STATIONS DE CHARGE




APERÇU DES COMPOSANTS + ACCESSOIRES.

Le système modulaire podis® comporte des modules d'alimentation et de distribution, des disjoncteurs de service, des dérivateurs, des kits de câble préfabriqués ainsi qu'une multitude d'accessoires.

ALIMENTATION

- raccordement cuivre ou alu/cuivre via câble plat 5G16 ou 5G25
- alimentation jusqu'à 5G70²
- courant max 100 A

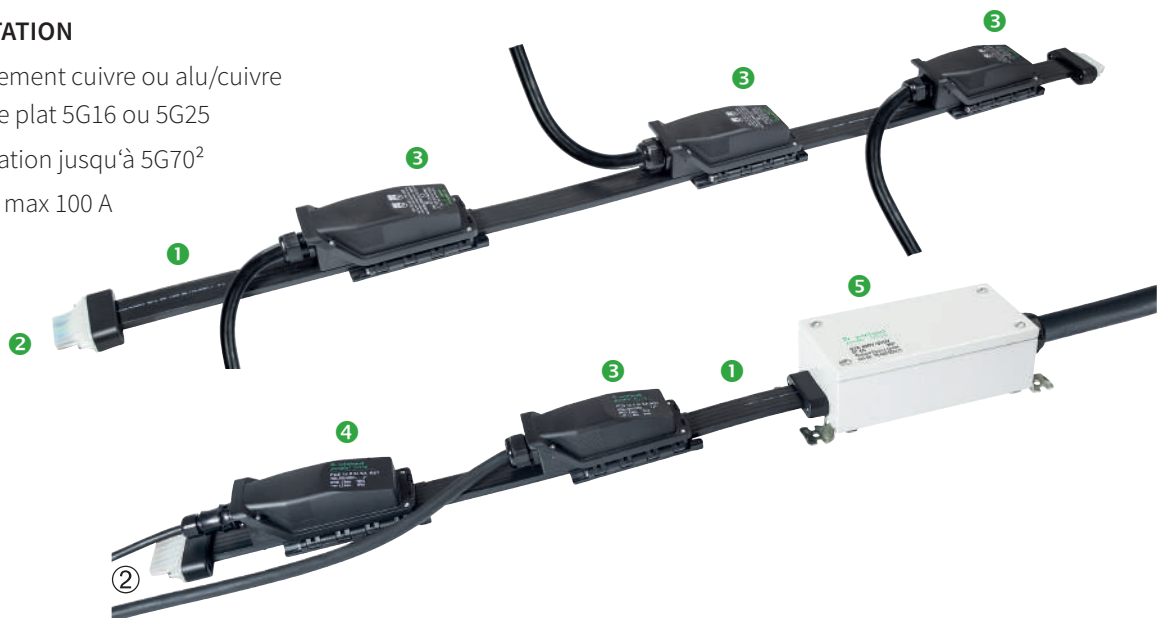

DONNÉES TECHNIQUES

Tension nominale :	690 V	Résistant aux UV
Courant nominal :	63 A	Données techniques complémentaires, cf. site internet
IP :	IP65 IK 10	

COMPOSANTS

Description	Type	Référence
1 Câble plat	5G16 LS0H (existe en 5G25 gris réf. 99.099.0000.8)	00.771.0307.1
2 Embout de câble	podis® 5G16	Z6.563.6553.0
3 Module d'alimentation et de dérivation M32	FCS 16 5 SI SA M32	75.456.0053.1
4 Module de dérivation	FCS 16 5 SI SA RST25	75.453.0053.1
5 Boîtier d'alimentation M50	FCS 16 5 SA SA M50K (diam. 25 - 31 mm)	75.450.0214.3

ACCESSOIRES



Description	Type	Référence
1 Presse-étoupe	M32x1,5, PA, (pour câble 18-25 mm) noir	Z5.507.1653.1
2 Presse-étoupe	M32x1,5, PA, (pour câble 10-21 mm) noir	Z5.507.1753.1
3 Contre-écrou	M32x1,5, PA, noir	05.505.0353.1
4 Support de fixation	podis® CON, à vis, mécanisme de verrouillage rapide, PVC noir	05.569.7453.0
5 Support de fixation	podis® CON, avec logement pour tube rigide D20, inox V2A	05.601.2419.0
6 Support de fixation	podis® CON, inox V2A	05.601.2519.0
7 Collier de serrage	pour tube rigide D20	F0.000.0055.7

Description	Type	Référence
Valise de démonstration	podis® CON 5G16, avec câble plat, modules de connexion pour presse-étoupe à vis M32, M25 et connecteurs RST, couteau de dénudage, outils et accessoires	99.785.0000.0
Valise de démonstration	podis® CON 5G16, avec câble plat, modules de connexion pour presse-étoupe à vis M32, outils et accessoires	99.788.0000.0

GESIS® CLASSIC

RAPIDE ET FACILE.

Composants préfabriqués industriellement et durables.

Avec un gain de temps impressionnant de 70% et une économie globale sur le chantier de 30% !

La gamme complète de produits GST18® permet une installation électrique simple, rentable et à l'épreuve du temps, du tableau électrique jusqu'au terminal bout de ligne.



CODAGE DES CONNECTEURS GST18®


GST18i3

Code 1 L, N, PE blanc noir	Code 2 L, N, PE pebble gray rouge tomate	Code 3 L, N, PE rouge saumon	Code 4 1, 2, 3 marron	Code 5 1, 2, 3 bleu pastel	Code 6 1, 2, 3 bleu turquoise	Code 7 1, PE, 2/N vert
Application	Application	Application	Application	Application	Application	Application
Secteur 250 V	Secteur 250 V USV	Secteur 250 V	Contact de type 250 V	Pas de TBTS (p.ex. DALI)	Sur mesure (sans PE)	Sur mesure (avec PE)

GST18i5

Code 1 3, N, PE, 2, 1 blanc noir	Code 2 L, N, PE, D2, D1 bleu pastel	Code 3 3, N, PE, 2, 1 pebble gray rouge tomate	Code 4 1, 2, PE, 3/N, 4 vert	Code 5 1, 2, 3, 4/N, 5 bleu turquoise	Code 6 1, 2, 3, 4, 5 bleu clair
Application	Application	Application	Application	Application	Application
Secteur 250 V	Pas de TBTS (p.ex. DALI)	Secteur 250 V USV	Sur mesure (avec PE)	Sur mesure (sans PE)	Basse Tension/ TBTS (50 V)


LES COMPOSANTS DU SYSTÈME GESIS®

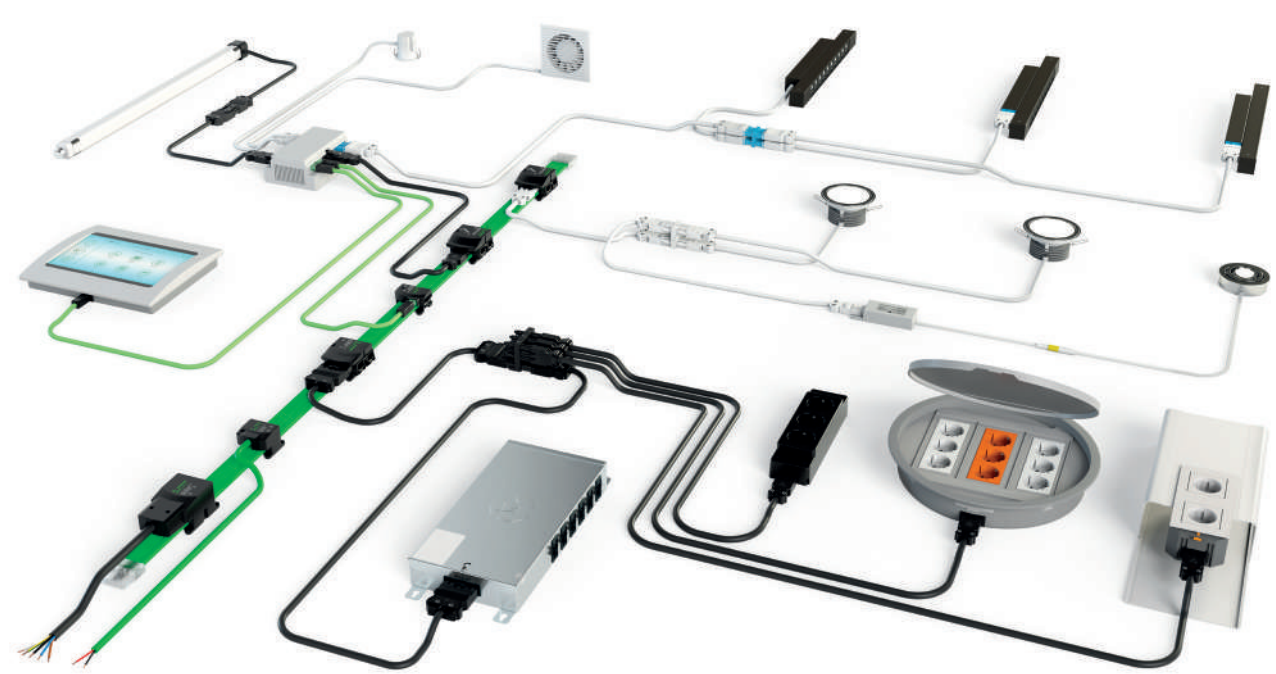

gesis® CLASSIC

OPTIMISATION DES ESPACES DE TRAVAIL

L'extrême flexibilité de gesis® permet une reconfiguration quasi instantanée et sans limite des espaces. Elle répond à la réglementation relative à l'efficacité énergétique des installations électriques. Nos répartiteurs vous permettent de commander des luminaires via interrupteur simple allumage, interrupteur double allumage, interrupteur va et vient ou détecteur de présence, sans avoir à câbler une boîte de distribution, sans erreur possible et sans avoir à se servir d'outils.

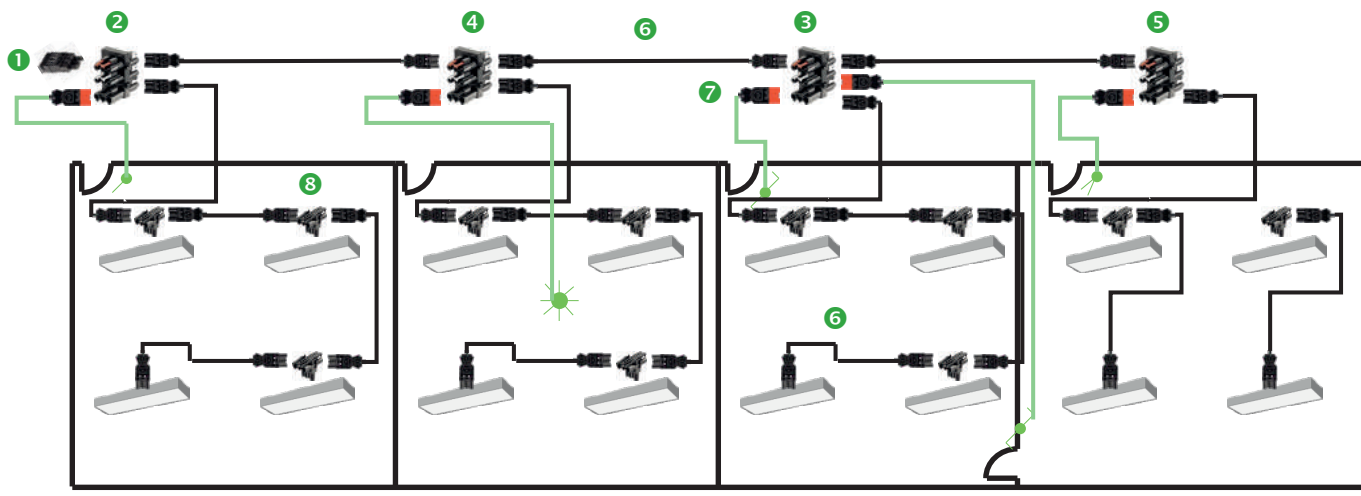

SYSTEM GESIS®
ENFICHABLE



	Référence	Désignation
1	92.933.0053.1	Connecteur GST18i3 femelle noir
2	92.030.0053.1	Répartiteur de commande simple allumage
3	92.030.0253.1	Répartiteur de commande va et vient
4	92.030.0153.1	Répartiteur de commande détection de mouvement
5	92.030.0353.1	Répartiteur de commande double allumage
6	92.232.X000.1	Cordon GST18i3 mâle / femelle de x ml 1,5mm² HO5VVF noir
7	92.934.0453.0	Connecteur GST18i3 male marron
8	92.030.3053.1	Répartiteur GST18i3 en T

GST18I3, 3 PÔLES

CONNECTEUR À RESSORT

DONNÉES TECHNIQUES

Tension nominale :	250 V	Section du connecteur	0,75 mm ² - 1,5 mm ²
Courant nominal :	20 A	fils souples :	
IP :	IP20	Section du connecteur	0,75 mm ² - 2,5 mm ²
Terminaisons par pôle :	2	solide :	
Verrouillable :	auto-bloquant (déverrouillage par outil)	Données techniques complémentaires, cf. site internet	

femelle

mâle



Pour cordons Ø 7.8-10.3 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	Secteur 250 V	L, N, PE	92.933.0053.1	92.934.0053.1
□ blanc	Secteur 250 V	L, N, PE	92.933.0053.0	92.934.0053.0
■ rouge saumon	Secteur 250 V	L, N, PE	92.933.0553.0	92.934.0553.0
■ marron	switch funktion 250 V	1, 2, 3	92.933.0453.0	92.934.0453.0
■ gris silex	USV 250 V	L, N, PE	92.933.0153.0	92.934.0153.0
■ rouge tomate	USV 250 V	L, N, PE	92.933.0153.5	92.934.0153.5
■ vert	Sur mesure (avec PE)	1, PE, 2/N	92.933.0753.0	92.934.0753.0
■ bleu turquoise	Sur mesure (sans PE)	1, 2, 3	92.933.0653.0	92.934.0653.0

VERSION À VIS SUR DEMANDE

RÉPARTITEUR



Répartiteur en T, avec option de fixation pour 07.413.6853.1/0, cascable

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250 V	L, N, PE	92.030.3153.1
□ blanc	Secteur 250 V	L, N, PE	92.030.3153.0
■ gris silex	USV 250 V	L, N, PE	92.030.3653.0
■ rouge tomate	USV 250 V	L, N, PE	92.030.3653.5

Répartiteur en H, avec option de fixation pour 07.413.6853.1/0

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250 V	L, N, PE	92.030.6953.1
□ blanc	Secteur 250 V	L, N, PE	92.030.6953.0
■ rouge saumon	Secteur 250 V	L, N, PE	92.030.7553.0
■ gris silex	USV 250 V	L, N, PE	92.030.7053.0
■ rouge tomate	USV 250 V	L, N, PE	92.030.7053.5
■ vert	Sur mesure (avec PE)	1, PE, 2/N	92.030.7253.0
■ bleu turquoise	Sur mesure (sans PE)	1, 2, 3	92.030.7153.0

Répartiteur en H, avec option de fixation pour 07.413.6853.1/0

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250 V	L, N, PE	92.030.0953.1
□ blanc	Secteur 250 V	L, N, PE	92.030.0953.0

Répartiteur de commandes, avec option de fixation pour 07.413.6853.1/0

Application	Marquage des pôles	Référence
On/Off - simple allumage	1, 2, 3	92.030.0053.1
Détecteur de mouvement	1, 2, 3	92.030.0153.1
Circuit va et vient	1, 2, 3	92.030.0253.1
Double allumage	1, 2, 3	92.030.0353.1

SCHÉMAS DE CÂBLAGE VOIR PAGE CI-CONTRE.

DÉRIVATEUR AUTO-DÉNUDANT

femelle



DONNÉES TECHNIQUES

Tension nominale :	250 V	Section du connecteur	1,5 mm ² - 2,5 mm ²
Courant nominal :	20 A	fils souples :	
IP :	IP20	Section du connecteur	1,5 mm ² - 2,5 mm ²
Terminaisons par pôle :	1	solide :	
Verrouillable :	auto-bloquant (déverrouillage par outil)	Données techniques complémentaires, cf. site internet	

Pour cordons Ø 5.5-12 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence
□ blanc	Secteur 250 V	L, N, PE	92.731.6053.0


Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques

GST18I3, 3 PÔLES

MODULE DE COMMANDE : SCHÉMAS DE CÂBLAGE


CIRCUIT VA ET VIENT

92.030.0253.1

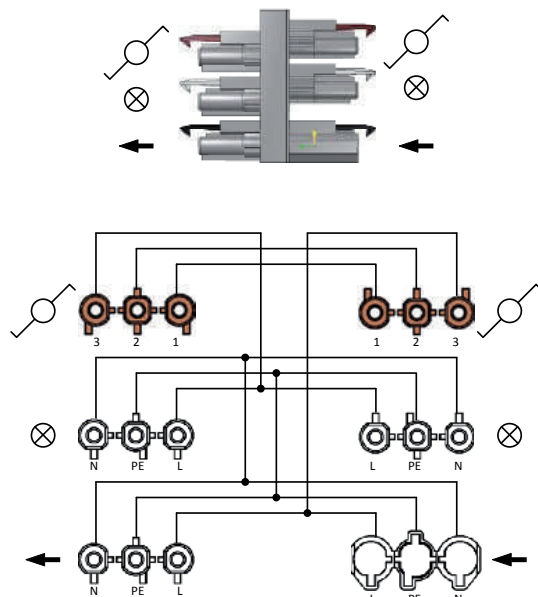

DÉTECTEUR DE MOUVEMENT

92.030.0153.1

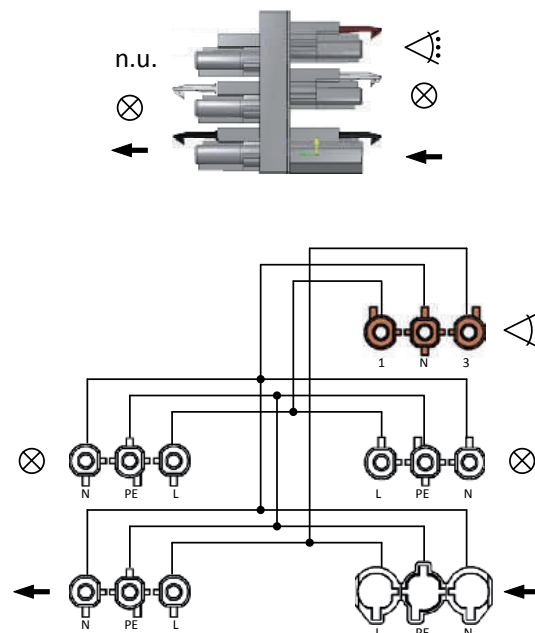

EXEMPLE DE CÂBLAGE



GST18I3, 3 PÔLES

CORDON CONFECTIONNÉ, FEMELLE - MÂLE, 1.5 MM², 16 A



DONNÉES TECHNIQUES

Tension nominale : 250 V
Courant nominal : 16 A
IP : IP20

Verrouillable : auto-bloquant (déverrouillage par outil)
Données techniques complémentaires, cf. site internet

Couleur du câble :
Couleur de codage : ■ noir
Application : Secteur 250 V
Marquage des pôles : L, N, PE

Couleur du câble :
Couleur de codage : □ blanc
Application : Secteur 250 V
Marquage des pôles : L, N, PE

Couleur du câble :
Couleur de codage : ■ rouge saumon
Application : Secteur 250 V
Marquage des pôles : L, N, PE

Longueur (m)	H05VV-F PVC Eca	H05Z1Z1-F sans halogène Cca s1 d1 a1
	Référence	Référence
1	■ noir 92.232.1000.1	■ noir 92.232.1050.1
2	92.232.2000.1	92.232.2050.1
3	92.232.3000.1	92.232.3050.1
4	92.232.4000.1	92.232.4050.1
5	92.232.5000.1	92.232.5050.1
6	92.232.6000.1	92.232.6050.1
7	92.232.7000.1	92.232.7050.1
8	92.232.8000.1	92.232.8050.1
1	■ noir 92.232.1000.2	□ blanc 92.232.1050.2
2	92.232.2000.2	92.232.2050.2
3	92.232.3000.2	92.232.3050.2
4	92.232.4000.2	92.232.4050.2
5	92.232.5000.2	92.232.5050.2
6	92.232.6000.2	92.232.6050.2
7	92.232.7000.2	92.232.7050.2
8	92.232.8000.2	92.232.8050.1
1	■ noir 92.232.1000.5	■ noir 92.232.1050.5
2	92.232.2000.5	92.232.2050.5
3	92.232.3000.5	92.232.3050.5
4	92.232.4000.5	92.232.4050.5
5	92.232.5000.5	92.232.5050.5
6	92.232.6000.5	92.232.6050.5
7	92.232.7000.5	92.232.7050.5
8	92.232.8000.5	92.232.8050.5

CORDON CONFECTIONNÉ, FEMELLE - MÂLE, 2.5 MM², 20 A



DONNÉES TECHNIQUES

Tension nominale : 250 V
Courant nominal : 20 A
IP : IP20

Verrouillable : auto-bloquant (déverrouillage par outil)
Données techniques complémentaires, cf. site internet

Couleur du câble :
Couleur de codage : ■ noir
Application : Secteur 250 V
Marquage des pôles : L, N, PE

Couleur du câble :
Couleur de codage : □ blanc
Application : Secteur 250 V
Marquage des pôles : L, N, PE

Couleur du câble :
Couleur de codage : ■ rouge saumon
Application : Secteur 250 V
Marquage des pôles : L, N, PE

Longueur (m)	H07RN-F	H05VV-F PVC Eca	H05Z1Z1-F sans halogène Cca s1 d1 a1
	Référence	Référence	Référence
2	■ noir G3.032.0203.1	■ noir 92.238.2000.1	■ noir 92.238.2050.1
3	G3.032.0303.1	92.238.3000.1	92.238.3050.1
4	G3.032.0403.1	92.238.4000.1	92.238.4050.1
5	G3.032.0503.1	92.238.5000.1	92.238.5050.1
6	G3.032.0603.1	92.238.6000.1	92.238.6050.1
7	G3.032.0703.1	92.238.7000.1	92.238.7050.1
8	G3.032.0803.1	92.238.8000.1	92.238.8050.1
2	■ noir G3.032.0203.2	□ blanc 92.238.2000.2	□ blanc 92.238.2050.2
3	G3.032.0303.2	92.238.3000.2	92.238.3050.2
4	G3.032.0403.2	92.238.4000.2	92.238.4050.2
5	G3.032.0503.2	92.238.5000.2	92.238.5050.2
6	G3.032.0603.2	92.238.6000.2	92.238.6050.2
7	G3.032.0703.2	92.238.7000.2	92.238.7050.2
8	G3.032.0803.2	92.238.8000.2	92.238.8050.2
2	■ noir G3.032.0203.5	■ noir 92.238.2000.5	■ noir 92.238.2050.5
3	G3.032.0303.5	92.238.3000.5	92.238.3050.5
4	G3.032.0403.5	92.238.4000.5	92.238.4050.5
5	G3.032.0503.5	92.238.5000.5	92.238.5050.5
6	G3.032.0603.5	92.238.6000.5	92.238.6050.5
7	G3.032.0703.5	92.238.7000.5	92.238.7050.5
8	G3.032.0803.5	92.238.8000.5	92.238.8050.5

Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques

GST18I3, 3 PÔLES

CORDON CONFECTIONNÉ, MÂLE DÉNUDÉ, 1.5 MM², 16 A



DONNÉES TECHNIQUES

Tension nominale : 250 V
Courant nominal : 16 A
IP : IP20

Verrouillable : auto-bloquant (déverrouillage par outil)
Préparation des terminaisons : extrémités de fil comprimées par ultrasons
Données techniques complémentaires, cf. site internet

Couleur du câble :
Couleur de codage : ■ noir
Application : Secteur 250 V
Marquage des pôles : L, N, PE

Couleur du câble :
Couleur de codage : □ blanc
Application : Secteur 250 V
Marquage des pôles : L, N, PE

	H07RN-F	H05VV-F PVC Eca	H05Z1Z1-F sans halogène Cca s1 d1 a1
Longueur (m)	Référence	Référence	Référence
	■ noir	■ noir	■ noir
1	G3.432.0102.1	92.232.1004.1	92.232.1054.1
2	G3.432.0202.1	92.232.2004.1	92.232.2054.1
3	G3.432.0302.1	92.232.3004.1	92.232.3054.1
4	G3.432.0402.1	92.232.4004.1	92.232.4054.1
5	G3.432.0502.1	92.232.5004.1	92.232.5054.1
6	G3.432.0602.1	92.232.6004.1	92.232.6054.1
7	G3.432.0702.1	92.232.7004.1	92.232.7054.1
8	G3.432.0802.1	92.232.8004.1	92.232.8054.1
	■ noir	□ blanc	□ blanc
1	G3.432.0102.2	92.232.1004.2	92.232.1054.2
2	G3.432.0202.2	92.232.2004.2	92.232.2054.2
3	G3.432.0302.2	92.232.3004.2	92.232.3054.2
4	G3.432.0402.2	92.232.4004.2	92.232.4054.2
5	G3.432.0502.2	92.232.5004.2	92.232.5054.2
6	G3.432.0602.2	92.232.6004.2	92.232.6054.2
7	G3.432.0702.2	92.232.7004.2	92.232.7054.2
8	G3.432.0802.2	92.232.8004.2	92.232.8054.2

gesis® CLASSIC

CORDON CONFECTIONNÉ, MÂLE DÉNUDÉ, 2.5 MM², 20 A



DONNÉES TECHNIQUES

Tension nominale : 250 V
Courant nominal : 16 A
IP : IP20

Verrouillable : auto-bloquant (déverrouillage par outil)
Préparation des terminaisons : extrémités de fil comprimées par ultrasons
Données techniques complémentaires, cf. site internet

Couleur du câble :
Couleur de codage : ■ noir
Application : Secteur 250 V
Marquage des pôles : L, N, PE

Couleur du câble :
Couleur de codage : □ blanc
Application : Secteur 250 V
Marquage des pôles : L, N, PE

	H07RN-F	H05VV-F PVC Eca	H05Z1Z1-F sans halogène Cca s1 d1 a1
Longueur (m)	Référence	Référence	Référence
	■ noir	■ noir	■ noir
1	G3.432.0103.1	92.238.1004.1	92.238.1054.1
2	G3.432.0203.1	92.238.2004.1	92.238.2054.1
3	G3.432.0303.1	92.238.3004.1	92.238.3054.1
4	G3.432.0403.1	92.238.4004.1	92.238.4054.1
5	G3.432.0503.1	92.238.5004.1	92.238.5054.1
6	G3.432.0603.1	92.238.6004.1	92.238.6054.1
7	G3.432.0703.1	92.238.7004.1	92.238.7054.1
8	G3.432.0803.1	92.238.8004.1	92.238.8054.1
	■ noir	□ blanc	□ blanc
1	G3.432.0103.2	92.238.1004.2	92.238.1054.2
2	G3.432.0203.2	92.238.2004.2	92.238.2054.2
3	G3.432.0303.2	92.238.3004.2	92.238.3054.2
4	G3.432.0403.2	92.238.4004.2	92.238.4054.2
5	G3.432.0503.2	92.238.5004.2	92.238.5054.2
6	G3.432.0603.2	92.238.6004.2	92.238.6054.2
7	G3.432.0703.2	92.238.7004.2	92.238.7054.2
8	G3.432.0803.2	92.238.8004.2	92.238.8054.2

GST15I5/GST18I

CORDON CONFECTIONNÉ HYBRIDE, MÂLE GST15I5 / FEMELLE GST18I5, 1.5 MM², 16 A



DONNÉES TECHNIQUES

Tension nominale :	250 V / 400 V	Verrouillable :	oui
Courant nominal :	16 A	Tension de choc nominale :	4 kV
IP :	IP20		
Degré de pollution :	2		

Couleur du câble :
Couleur de codage : ■ bleu pastel
Application : Secteur 250/400 V
Marquage des pôles : D1, D2, L, N, PE

H05Z1Z1-F
sans halogène
Cca s1 d1 a1

Longueur (m)	Référence
	■ noir
2	G0.000.0656.0
3	G0.000.0656.1
4	G0.000.0573.8
5	G0.000.0573.9
6	G0.000.0574.0
7	G0.000.0574.1
8	G0.000.0574.2
9	G0.000.0574.3
10	G0.000.0655.9




GST18I3, 3 PÔLES

BOÎTE DE DISTRIBUTION



Black box, entrée GST18i3, sortie 7x GST18i3

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250 V	L, N, PE	99.238.0028.0
■ rouge saumon	Secteur 250 V	L, N, PE	99.300.0028.0
□ blanc	Secteur 250 V	L, N, PE	99.289.0028.0






GST18I3, 5 PÔLES

BOÎTE DE DISTRIBUTION



Black box, entrée GST18i5, sortie 6 x GST18i3 & 1 x GST18i5

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250/400 V	1, 2, PE, 3, 4/N	99.237.0028.0
□ blanc	Secteur 250/400 V	1, 2, PE, 3, 4/N	99.324.0028.0
■ noir et rouge saumon	Secteur 250/400 V	1, 2, PE, 3, 4/N	99.281.0028.0



Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions
(mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques

GST18I5, 5 PÔLES

RACCORDEMENT À VIS

DONNÉES TECHNIQUES

Tension nominale :	250 V / 400 V	Section du connecteur fils 0,75 mm ² - 2,5 mm ²
Courant nominal :	20 A	souples :
IP :	IP20	Section du connecteur 0,75 mm ² - 2,5 mm ²
Terminaisons par pôle :	1	solide :
Verrouillable :	auto-bloquant (déverrouillage par outil)	Données techniques complémentaires, cf. site internet

femelle



mâle



Pour cordons Ø 7-13.5 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	Secteur 250/400 V	3, N, PE, 2, 1	92.953.4053.1	92.954.4053.1
□ blanc	Secteur 250/400 V	3, N, PE, 2, 1	92.953.4053.0	92.954.4053.0
■ bleu pastel	Secteur 250 V + pas de TBTS	L, N, PE, D2, D1	92.953.4453.0	92.954.4453.0
■ bleu clair	TBTS	1, 2, 3, 4, 5	92.953.4153.0*	92.954.4153.0*
■ gris silex	UPS 250/400 V	3, N, PE, 2, 1	92.953.4553.0	92.954.4553.0
■ rouge tomate	UPS 250/400 V	3, N, PE, 2, 1	92.953.4553.5	92.954.4553.5
■ vert	Sur mesure (avec PE)	1, 2, PE, 3/N, 4	92.953.4253.0	92.954.4253.0
■ bleu turquoise	Sur mesure (sans PE)	1, 2, 3, 4/N, 5	92.953.4353.0*	92.954.4353.0*

gesis® CLASSIC

RÉPARTITEUR



Répartiteur en T, avec option de fixation pour 07.413.6853.1/0, cascadeable

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250/400 V	3, N, PE, 2, 1	92.050.3053.1
□ blanc	Secteur 250/400 V	3, N, PE, 2, 1	92.050.3053.0
■ bleu pastel	Secteur 250 V + pas de TBTS	L, N, PE, D2, D1	92.050.3453.0
■ gris silex	UPS 250/400 V	3, N, PE, 2, 1	92.050.3553.0
■ rouge tomate	UPS 250/400 V	3, N, PE, 2, 1	92.050.3553.5

Répartiteur en H, avec option de fixation pour 07.413.6853.1/0

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250/400 V	3, N, PE, 2, 1	92.050.6953.1
□ blanc	Secteur 250/400 V	3, N, PE, 2, 1	92.050.6953.0
■ bleu pastel	Secteur 250 V + pas de TBTS	L, N, PE, D2, D1	92.050.7453.0
■ bleu clair	TBTS	1, 2, 3, 4, 5	92.050.7353.0*
■ gris silex	UPS 250/400 V	3, N, PE, 2, 1	92.050.7053.0
■ rouge tomate	UPS 250/400 V	3, N, PE, 2, 1	92.050.7053.5
■ vert	Sur mesure (avec PE)	1, 2, PE, 3/N, 4	92.050.7253.0
■ bleu turquoise	Sur mesure (sans PE)	1, 2, 3, 4/N, 5	92.050.7153.0*

Répartiteur avec sélecteur de phase, avec option de fixation pour 07.413.6853.1/0

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250/400 V	3, N, PE, 2, 1	92.050.0153.1
□ blanc	Secteur 250/400 V	3, N, PE, 2, 1	92.050.0153.0
■ rouge tomate	UPS 250/400 V	1, 2, 3, N, PE	92.050.2153.5

ACCESSOIRES



Vérrou, pour connexions volantes

Couleur	Référence
■ noir	05.587.3156.1
□ blanc	05.587.3156.0

Support de fixation pour interface de distribution

Couleur	Référence
■ noir	07.413.6853.1
□ blanc	07.413.6853.0

GST18I5, 5 PÔLES

CORDONS CONFECTIONNÉS, FEMELLE - MÂLE, 1.5 MM², 16 A



DONNÉES TECHNIQUES

Tension nominale : 250 V / 400 V
Courant nominal : 16 A
IP : IP20

Verrouillable : auto-bloquant (déverrouillage par outil)

Données techniques complémentaires, cf. site internet

Couleur du câble :
Couleur de codage : ■ noir
Application : Secteur 250/400 V
Marquage des pôles : 3, N, PE, 2, 1

Couleur du câble :
Couleur de codage : □ blanc
Application : Secteur 250/400 V
Marquage des pôles : 3, N, PE, 2, 1

Couleur du câble :
Couleur de codage : ■ bleu pastel
Application : Secteur 250V+ pas de TBTS
Marquage des pôles : L, N, PE, D2, D1

	H05VV-F PVC Eca	H05Z1Z1-F sans halogène B2ca s1 d1 a1	H05Z1Z1-F sans halogène Cca s1 d1 a1
Longueur (m)	Référence	Référence	Référence
	■ noir	■ noir	■ noir
2	92.257.2000.1	92.257.2070.1	92.257.2050.1
3	92.257.3000.1	92.257.3070.1	92.257.3050.1
4	92.257.4000.1	92.257.4070.1	92.257.4050.1
5	92.257.5000.1	92.257.5070.1	92.257.5050.1
6	92.257.6000.1	92.257.6070.1	92.257.6050.1
7	92.257.7000.1	92.257.7070.1	92.257.7050.1
8	92.257.8000.1	92.257.8070.1	92.257.8050.1
	□ blanc	□ blanc	□ blanc
2	92.257.2000.2	92.257.2070.2	92.257.2050.2
3	92.257.3000.2	92.257.3070.2	92.257.3050.2
4	92.257.4000.2	92.257.4070.2	92.257.4050.2
5	92.257.5000.2	92.257.5070.2	92.257.5050.2
6	92.257.6000.2	92.257.6070.2	92.257.6050.2
7	92.257.7000.2	92.257.7070.2	92.257.7050.2
8	92.257.8000.2	92.257.8070.2	92.257.8050.2
	■ noir	■ noir	■ noir
2	92.257.2000.9	92.257.2070.9	92.257.2050.9
3	92.257.3000.9	92.257.3070.9	92.257.3050.9
4	92.257.4000.9	92.257.4070.9	92.257.4050.9
5	92.257.5000.9	92.257.5070.9	92.257.5050.9
6	92.257.6000.9	92.257.6070.9	92.257.6050.9
7	92.257.7000.9	92.257.7070.9	92.257.7050.9
8	92.257.8000.9	92.257.8070.9	92.257.8050.9

CORDONS CONFECTIONNÉS, FEMELLE - MÂLE, 2.5 MM², 20 A



DONNÉES TECHNIQUES

Tension nominale : 250 V / 400 V
Courant nominal : 20 A
IP : IP20

Verrouillable : auto-bloquant (déverrouillage par outil)

Données techniques complémentaires, cf. site internet

Couleur du câble :
Couleur de codage : ■ noir
Application : Secteur 250/400 V
Marquage des pôles : 3, N, PE, 2, 1

Couleur du câble :
Couleur de codage : □ blanc
Application : Secteur 250/400 V
Marquage des pôles : 3, N, PE, 2, 1

Couleur du câble :
Couleur de codage : ■ bleu pastel
Application : Secteur 250V+ pas de TBTS
Marquage des pôles : L, N, PE, D2, D1

	H05VV-F PVC Eca	H05Z1Z1-F sans halogène Eca	H05Z1Z1-F sans halogène Cca s1 d1 a1
Longueur (m)	Référence	Référence	Référence
	■ noir	■ noir	■ noir
2	92.258.2000.1	92.258.2060.1	92.258.2050.1
3	92.258.3000.1	92.258.3060.1	92.258.3050.1
4	92.258.4000.1	92.258.4060.1	92.258.4050.1
5	92.258.5000.1	92.258.5060.1	92.258.5050.1
6	92.258.6000.1	92.258.6060.1	92.258.6050.1
7	92.258.7000.1	92.258.7060.1	92.258.7050.1
8	92.258.8000.1	92.258.8060.1	92.258.8050.1
	□ blanc	□ blanc	□ blanc
2	92.258.2000.2	92.258.2060.2	92.258.2050.2
3	92.258.3000.2	92.258.3060.2	92.258.3050.2
4	92.258.4000.2	92.258.4060.2	92.258.4050.2
5	92.258.5000.2	92.258.5060.2	92.258.5050.2
6	92.258.6000.2	92.258.6060.2	92.258.6050.2
7	92.258.7000.2	92.258.7060.2	92.258.7050.2
8	92.258.8000.2	92.258.8060.2	92.258.8050.2
	■ noir	■ noir	■ noir
2	92.258.2000.9	92.258.2060.9	92.258.2050.9
3	92.258.3000.9	92.258.3060.9	92.258.3050.9
4	92.258.4000.9	92.258.4060.9	92.258.4050.9
5	92.258.5000.9	92.258.5060.9	92.258.5050.9
6	92.258.6000.9	92.258.6060.9	92.258.6050.9
7	92.258.7000.9	92.258.7060.9	92.258.7050.9
8	92.258.8000.9	92.258.8060.9	92.258.8050.9

Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques

GST18I5, 5 PÔLES

CORDONS CONFECTIONNÉS, MÂLE DÉNUDÉ, 1.5 MM², 16 A



DONNÉES TECHNIQUES

Tension nominale : 250 V
Courant nominal : 16 A
IP : IP20
Verrouillable : auto-bloquant (déverrouillage par outil)

Préparation des terminaisons : extrémités de fil comprimées par ultrasons du conducteur :
Données techniques complémentaires, cf. site internet

Couleur du câble :
Couleur de codage : ■ noir
Application : Secteur 250/400 V
Marquage des pôles : 3, N, PE, 2, 1

Couleur du câble :
Couleur de codage : □ blanc
Application : Secteur 250/400 V
Marquage des pôles : 3, N, PE, 2, 1

Couleur du câble :
Couleur de codage : ■ bleu pastel
Application : Secteur 250 V + non SELV
Marquage des pôles : L, N, PE, D2, D1

	H05VV-F PVC Eca	H05Z1Z1-F sans halogène B2ca s1 d1 a1	H05Z1Z1-F sans halogène Cca s1 d1 a1
Longueur (m)	Référence	Référence	Référence
	■ noir	■ noir	■ noir
1	92.257.1004.1	92.257.1074.1	92.257.1054.1
2	92.257.2004.1	92.257.2074.1	92.257.2054.1
3	92.257.3004.1	92.257.3074.1	92.257.3054.1
4	92.257.4004.1	92.257.4074.1	92.257.4054.1
5	92.257.5004.1	92.257.5074.1	92.257.5054.1
6	92.257.6004.1	92.257.6074.1	92.257.6054.1
7	92.257.7004.1	92.257.7074.1	92.257.7054.1
8	92.257.8004.1	92.257.8074.1	92.257.8054.1
	□ blanc	□ blanc	□ blanc
1	92.257.1004.2	92.257.1074.2	92.257.1054.2
2	92.257.2004.2	92.257.2074.2	92.257.2054.2
3	92.257.3004.2	92.257.3074.2	92.257.3054.2
4	92.257.4004.2	92.257.4074.2	92.257.4054.2
5	92.257.5004.2	92.257.5074.2	92.257.5054.2
6	92.257.6004.2	92.257.6074.2	92.257.6054.2
7	92.257.7004.2	92.257.7074.2	92.257.7054.2
8	92.257.8004.2	92.257.8074.2	92.257.8054.2
	■ noir	■ noir	■ noir
1	92.257.1004.9	92.257.1074.9	92.257.1054.9
2	92.257.2004.9	92.257.2074.9	92.257.2054.9
3	92.257.3004.9	92.257.3074.9	92.257.3054.9
4	92.257.4004.9	92.257.4074.9	92.257.4054.9
5	92.257.5004.9	92.257.5074.9	92.257.5054.9
6	92.257.6004.9	92.257.6074.9	92.257.6054.9
7	92.257.7004.9	92.257.7074.9	92.257.7054.9
8	92.257.8004.9	92.257.8074.9	92.257.8054.9



Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques

DISTRIBUTION DES CONTRÔLEURS D'ÉCLAIRAGE


ALIMENTATION DES CONTRÔLEURS D'ÉCLAIRAGE EN IDC

L'alimentation des contrôleurs est faite par l'intermédiaire d'un connecteur IDC de type Wieland, ce dernier permet d'assurer une connexion rapide autodénudante sur un câble de type U1000R02V.

ALIMENTATION DES LUMINAIRES DE BUREAU

L'alimentation des luminaires est faite par l'intermédiaire de cordons équipés de connecteurs GST pré confectionnés en usine.


Référence	Désignation
1 92.731.6053.0	Connecteur GST18i3 femelle idc blanc
2 91.232.X009.2	Cordon M GST18i3 / F GST15i3 x ml 1,5 ² HO5VVF blanc (Eca)
3 G0.000.0656.1	Cordon GST15i5m-GST18i5f 3ml 5G 1,5 ² HO5VVF bleu (Eca)
3 G0.000.0573.9	Cordon GST15i5m-GST18i5f 5ml 5G 1,5 ² HO5VVF bleu (Eca)
3 G0.000.0574.1	Cordon GST15i5m-GST18i5f 9ml 5G 1,5 ² HO5VVF bleu (Eca)
4 92.050.3453.0	Répartiteur 1E/2S GST18i5 en T bleu pastel
5 92.257.4000.9	Cordon GST18i5 4m M/F 1,5 ² HO5VVF bleu pastel (Eca)
6 05.587.3156.0	Levier de verrouillage blanc

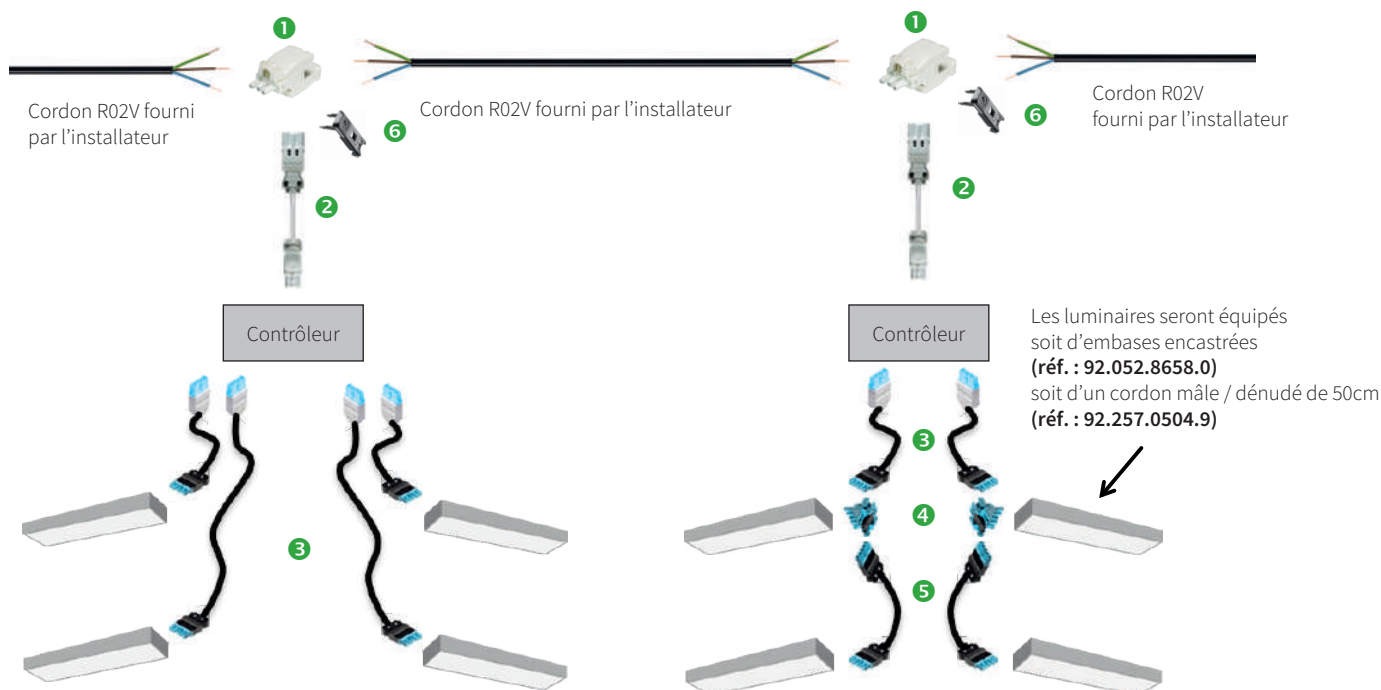

DISTRIBUTION DES CIRCULATIONS (COMMANDÉE)

ALIMENTATION DE LUMINAIRES CIRCULATION

La distribution en cordons, répartiteurs en T et répartiteurs simple allumage vous permettra de câbler puis de commander votre circulation avec facilité.

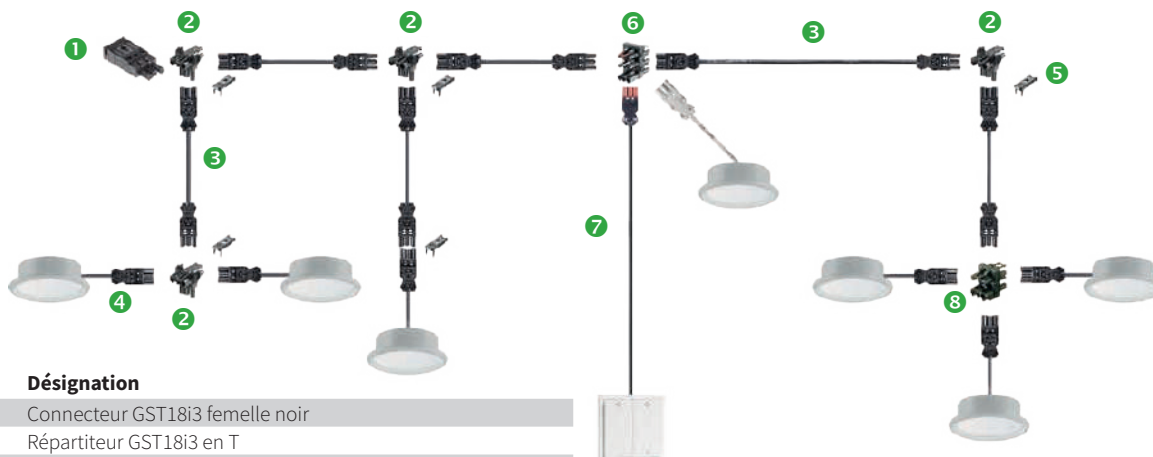

Référence	Désignation
1 92.933.0053.1	Connecteur GST18i3 femelle noir
2 92.030.3053.1	Répartiteur GST18i3 en T
3 92.232.X000.1	Cordon GST18i5 mâle / femelle de x ml 1,5mm ² HO5VVF noir
4 92.232.X004.1	Cordon GST18i3 mâle / dénudé de x ml 1,5mm ² HO5VVF noir
5 05.587.3156.1	Levier de verrouillage noir
6 92.030.0053.1	Répartiteur de commande simple allumage
7 92.934.0453.0	Connecteur GST18i3 mâle à ressort marron
8 92.030.6953.1	Répartiteur GST18i3

Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques


CÂBLAGE D'ÉCLAIRAGE

GESIS® NRG EN COMBINAISON AVEC GESIS® CLASSIC

gradable, DALI ou 1-10 V

Le câble plat gesis® NRG combiné au système gesis® CLASSIC permet d'alimenter en courant de manière extrêmement simple des luminaires DALI par exemple. La technique de connexion des luminaires peut ainsi être conçue en toute flexibilité.

Un câble plat gesis® NRG à 7 pôles pour combiner le courant triphasé et le signal de variation de l'intensité est disponible pour les applications de grande superficie et des longueurs de ligne importantes.

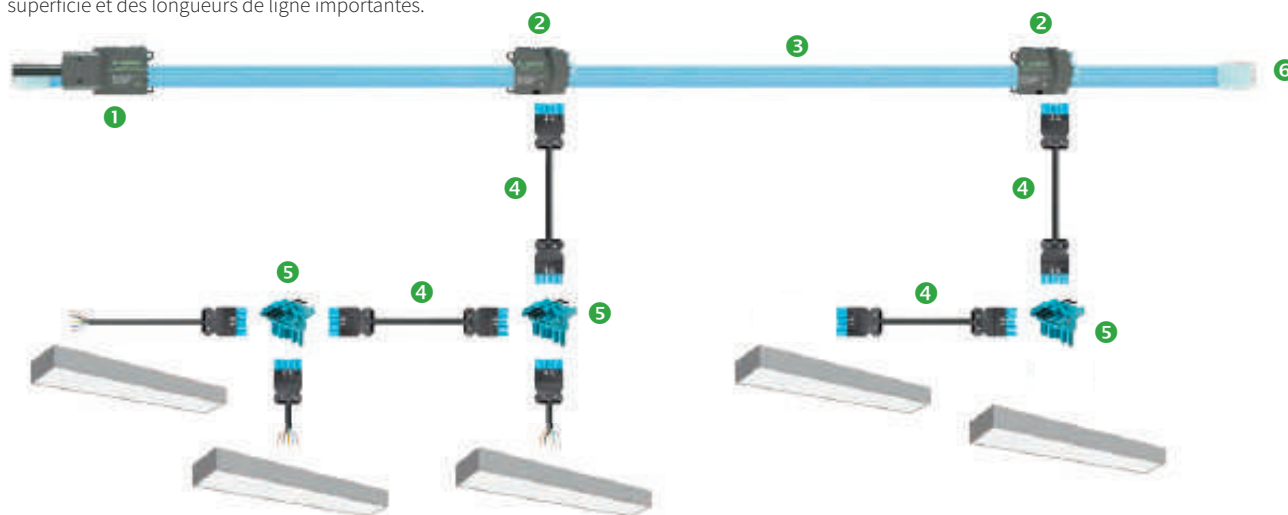


Référence	Désignation
1	92.050.1653.0 Bloc d'alimentation
2	92.051.5553.0 Dérivateur câble plat
3	00.712.0303.6 Câble plat bleu pastel gesis® NRG 5G 2,5 mm ² , avec halogène, Eca
4	92.257.X000.9 Cordon GST18i5 mâle/femelle, 1,5 mm ² de X mètres
5	92.050.3453.0 Répartiteur en T GST 18i5 bleu pastel
6	06.562.0653.0 Bouchon de terminaison

DISTRIBUTION DES POSTES DE TRAVAIL (TRI)

ALIMENTATION DES NOURRICES PAR BOITE DE DISTRIBUTION TÉTRA

L'alimentation des nourrices est réalisée au moyen de Blackbox gesis® d'une épaisseur de 3 cm posées en faux planchers. Ces boîtes sont équipées de connecteurs sécurisés GST et déconnectables à l'aide d'un outil.

Les boîtes sont traversantes (en tétra) et permettent l'alimentation de 6 nourrices en monophasé (12 nourrices max par départ). Les liaisons entre les boîtes de distribution et les nourrices sont assurées à l'aide de cordons de 7 mètres en HO7RNF (catégorie Eca), équipés de connecteurs mâle et femelle de type Wieland.

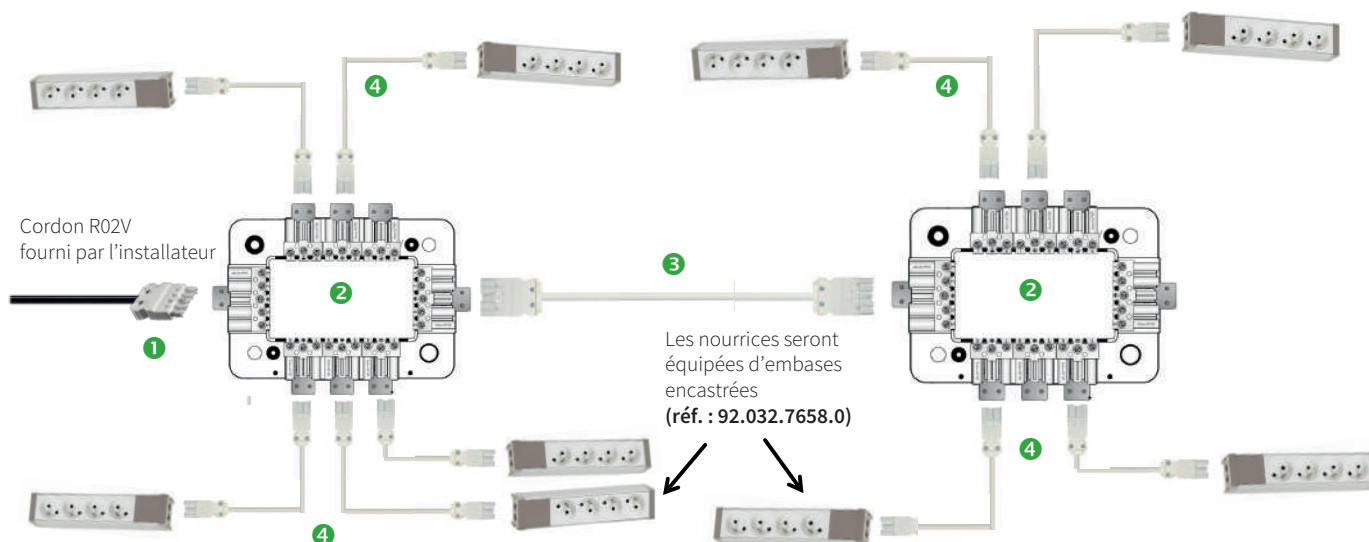



Référence	Désignation
1	92.953.4053.0 Connecteur GST18i5 femelle blanc
2	99.324.0028.0 Boîte de dérivation GST18i5 tri / mono, 6 sorties blanches
3	92.258.X000.2 Cordon GST18i5 mâle / femelle de x ml 2,5mm ² HO5VVF blanc
4	G3.032.0X03.2 Cordon GST18i3 mâle / femelle de x ml 2,5mm ² HO7RNF blanc

Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques

GESIS® MINI

RAPIDE ET SÛR.

Ce système d'installation de connecteurs enfichables combine des dimensions minimales avec une flexibilité maximale. gesis® MINI est idéal comme système d'installation électrique peu encombrant aussi bien pour les connexions internes des équipements que comme connecteur d'équipement – conformément aux exigences de l'installation fixe, bien sûr.

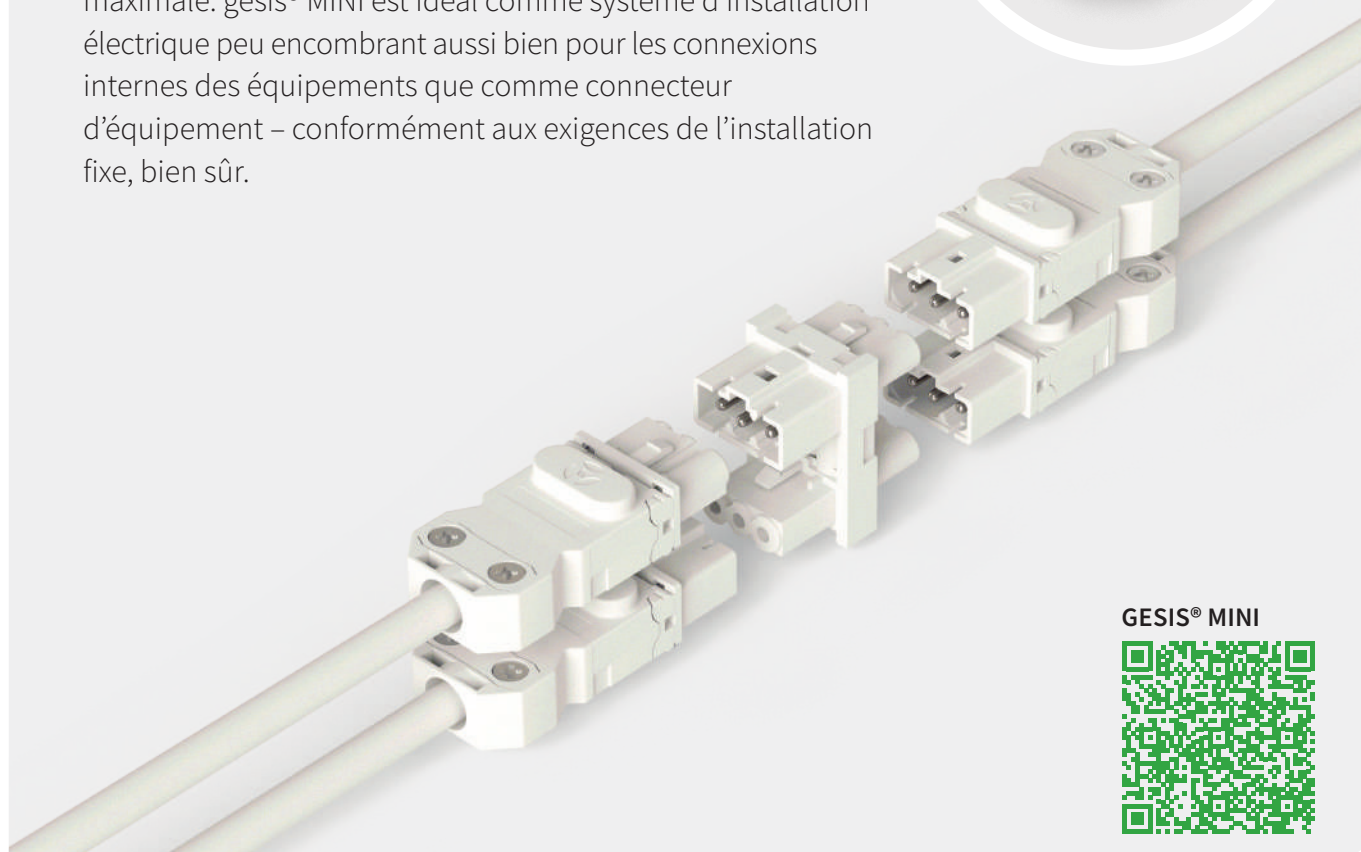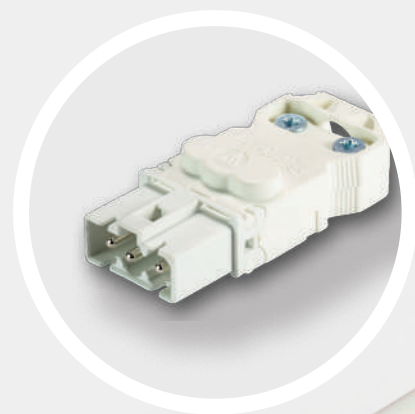

GESIS® MINI



CODAGE DES CONNECTEURS **GST15**

GST15i2

Code 1 L, N blanc, noir	Code 2 D1, D2 bleu pastel	Code 3 1, 2 bleu clair
Application Secteur 250 V Classe de protection II	Application Pas de TBTS (p.ex. DALI)	Application Basse tension/TBTS (50V)

GST15i3

Code 1 L, N, PE blanc, noir	Code 4 1, 2, 3 marron
Application Secteur 250 V	Application Commutation

AUTRES CODAGES DES DIFF. VERSIONS DE PRISES SUR DEMANDE.

GST15I2, CONNECTEURS, 2 PÔLES


RACCORDEMENT À VIS

DONNÉES TECHNIQUES

Tension nominale :	250 V	Section du connecteur fils 0,5 mm ² - 2,5 mm ²
Courant nominal :	16 A	souples :
IP :	IP20	Section du connecteur 0,5 mm ² - 2,5 mm ²
Terminaisons par pôle :	1	solide :
Verrouillable :	auto-bloquant (déverrouillage par outil)	Données techniques complémentaires, cf. site internet

femelle

mâle

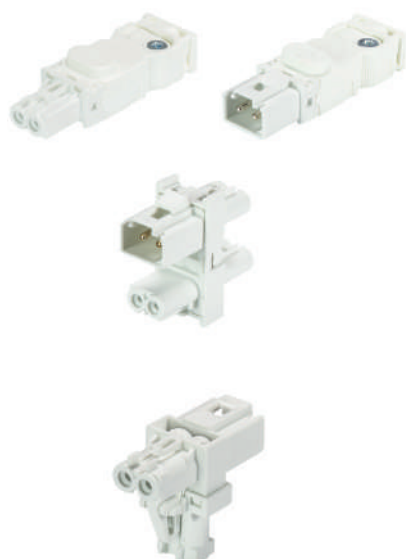

Pour cordons Ø 3.4-5.5 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	Indice de protection II 250 V	L, N	91.921.2053.1	91.922.2053.1
□ blanc	Indice de protection II 250 V	L, N	91.921.2053.0	91.922.2053.0
■ bleu pastel	pas de TBTS	D1, D2	91.921.2453.0*	91.922.2453.0*
■ bleu clair	TBTS	1, 2	91.921.2353.0*	91.922.2353.0*

Répartiteur en H, avec option de fixation pour 07.418.9153.1

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Indice de protection II 250 V	L, N	91.020.4953.1
□ blanc	Indice de protection II 250 V	L, N	91.020.4953.0
■ bleu pastel	pas de TBTS	D1, D2	91.020.5053.0*
■ bleu clair	TBTS	1, 2	91.020.5153.0*

Répartiteur en T, avec option de fixation, cascable

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	IP II 250 V	L, N	91.020.1053.1
□ blanc	IP II 250 V	L, N	91.020.1053.0
■ bleu pastel	pas de TBTS	D1, D2	91.020.1253.0*
■ bleu clair	TBTS	1, 2	91.020.1453.0*

GST15I3, CONNECTEURS, 3 PÔLES


RACCORDEMENT À VIS

DONNÉES TECHNIQUES

Tension nominale :	250 V	Section du connecteur fils 0,5 mm ² - 2,5 mm ²
Courant nominal :	16 A	souples :
IP :	IP20	Section du connecteur 0,5 mm ² - 2,5 mm ²
Terminaisons par pôle :	1	solide :
Verrouillable :	auto-bloquant (déverrouillage par outil)	Données techniques complémentaires, cf. site internet

femelle

mâle

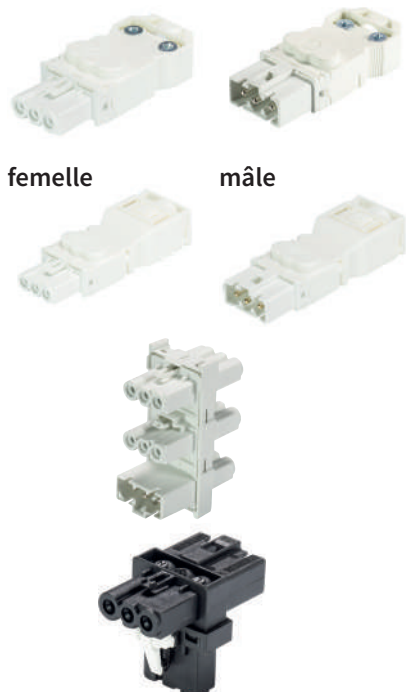

Pour cordons Ø 5.5-9 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	Secteur 250 V	L, N, PE	91.931.3053.1	91.932.3053.1
□ blanc	Secteur 250 V	L, N, PE	91.931.3053.0	91.932.3053.0
■ marron	Commutation 250 V	1, 2, 3	91.931.3853.0	91.932.3853.0
□ no-flame blanc	no-flame acc. IEC 60335-1	L, N, PE	91.931.3057.0	91.932.3057.0

Pour cordons Ø 5.6-11 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	Secteur 250 V	L, N, PE	91.931.4053.1	91.932.4053.1
□ blanc	Secteur 250 V	L, N, PE	91.931.4053.0	91.932.4053.0

Répartiteur en H, avec option de fixation pour 07.418.9253.1

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250 V	L, N, PE	91.030.5253.1
□ blanc	Secteur 250 V	L, N, PE	91.030.5253.0

Répartiteur en T, avec option de fixation, cascable

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250 V	L, N, PE	91.030.1053.1
□ blanc	Secteur 250 V	L, N, PE	91.030.1053.0

Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques

GST15I2, 2 PÔLES

CORDONS CONFECTIONNÉS, FEMELLE - MÂLE, 1.5 MM², 16 A



DONNÉES TECHNIQUES

Tension nominale : 250 V
Courant nominal : 16 A
IP : IP20

Verrouillable : auto-bloquant (déverrouillage par outil)
Données techniques complémentaires, cf. site internet

Couleur du câble :
Couleur de codage : ☐ blanc
Application : IP II
250 V
Marquage des pôles : L, N

Couleur du câble :
Couleur de codage : ☒ bleu pastel
Application : pas de TBTS
Marquage des pôles : D1, D2

	H05VV-F PVC Eca	H05Z1Z1-F Sans halogène B2ca s1 d1 a1	H05Z1Z1-F Sans halogène Cca s1 d1 a1
Longueur (m)	Référence	Référence	Référence
	☐ blanc	☐ blanc	☐ blanc
1	91.222.1000.2	91.222.1070.2	91.222.1050.2
2	91.222.2000.2	91.222.2070.2	91.222.2050.2
3	91.222.3000.2	91.222.3070.2	91.222.3050.2
4	91.222.4000.2	91.222.4070.2	91.222.4050.2
5	91.222.5000.2	91.222.5070.2	91.222.5050.2
6	91.222.6000.2	91.222.6070.2	91.222.6050.2
7	91.222.7000.2	91.222.7070.2	91.222.7050.2
8	91.222.8000.2	91.222.8070.2	91.222.8050.2
	☐ blanc	☐ blanc	☐ blanc
1	91.222.1000.9*	91.222.1070.9*	91.222.1050.9*
2	91.222.2000.9*	91.222.2070.9*	91.222.2050.9*
3	91.222.3000.9*	91.222.3070.9*	91.222.3050.9*
4	91.222.4000.9*	91.222.4070.9*	91.222.4050.9*
5	91.222.5000.9*	91.222.5070.9*	91.222.5050.9*
6	91.222.6000.9*	91.222.6070.9*	91.222.6050.9*
7	91.222.7000.9*	91.222.7070.9*	91.222.7050.9*
8	91.222.8000.9*	91.222.8070.9*	91.222.8050.9*

CORDONS CONFECTIONNÉS, FEMELLE - MÂLE, 1.5 MM², 16 A



DONNÉES TECHNIQUES

Tension nominale : 250 V
Courant nominal : 16 A
IP : IP20

Verrouillable : auto-bloquant (déverrouillage par outil)
Données techniques complémentaires, cf. site internet

Couleur du câble :
Couleur de codage : ☒ noir
Application : Secteur 250 V
Marquage des pôles : L, N, PE

Couleur du câble :
Couleur de codage : ☐ blanc
Application : Secteur 250 V
Marquage des pôles : L, N, PE

	H05VV-F PVC Eca	H05Z1Z1-F Sans halogène B2ca s1 d1 a1	H05Z1Z1-F Sans halogène Cca s1 d1 a1
Longueur (m)	Référence	Référence	Référence
	☒ noir	☒ noir	☒ noir
1	91.232.1000.1	91.232.1070.1	91.232.1050.1
2	91.232.2000.1	91.232.2070.1	91.232.2050.1
3	91.232.3000.1	91.232.3070.1	91.232.3050.1
4	91.232.4000.1	91.232.4070.1	91.232.4050.1
5	91.232.5000.1	91.232.5070.1	91.232.5050.1
6	91.232.6000.1	91.232.6070.1	91.232.6050.1
7	91.232.7000.1	91.232.7070.1	91.232.7050.1
8	91.232.8000.1	91.232.8070.1	91.232.8050.1
	☐ blanc	☐ blanc	☐ blanc
1	91.232.1000.2	91.232.1070.2	91.232.1050.2
2	91.232.2000.2	91.232.2070.2	91.232.2050.2
3	91.232.3000.2	91.232.3070.2	91.232.3050.2
4	91.232.4000.2	91.232.4070.2	91.232.4050.2
5	91.232.5000.2	91.232.5070.2	91.232.5050.2
6	91.232.6000.2	91.232.6070.2	91.232.6050.2
7	91.232.7000.2	91.232.7070.2	91.232.7050.2
8	91.232.8000.2	91.232.8070.2	91.232.8050.2

GST15, ACCESSOIRES



Platine de fixation, pour répartiteur h/H, avec option de fixation

Couleur	Référence
■ noir	07.418.9153.1



Platine de fixation, pour répartiteur HH, avec option de fixation

Couleur	Référence
■ noir	07.418.9253.1

gesis®MINI

CONFIGURATEUR EN LIGNE

CONCEVEZ EN QUELQUES CLICS VOS SOLUTIONS POUR LE BÂTIMENT

Chez Wieland on considère que la plus value apportée à nos clients doit commencer au moment de la naissance des chantiers.

Notre outil de conception en ligne permet la conception de vos installations électriques enfichables pour les boîtes de sol de différentes tailles. Les listes de pièces sont générées en quelques clics, tandis que la faisabilité est constamment vérifiée en parallèle. Les données peuvent ensuite être traitées individuellement en les exportant vers des tableurs ou notre catalogue électronique.

L'application fonctionne sur les appareils mobiles et de bureau.





CONFIGURATEUR
EN LIGNE




GESIS® NRG

LE CÂBLE PLAT FLEXIBLE.

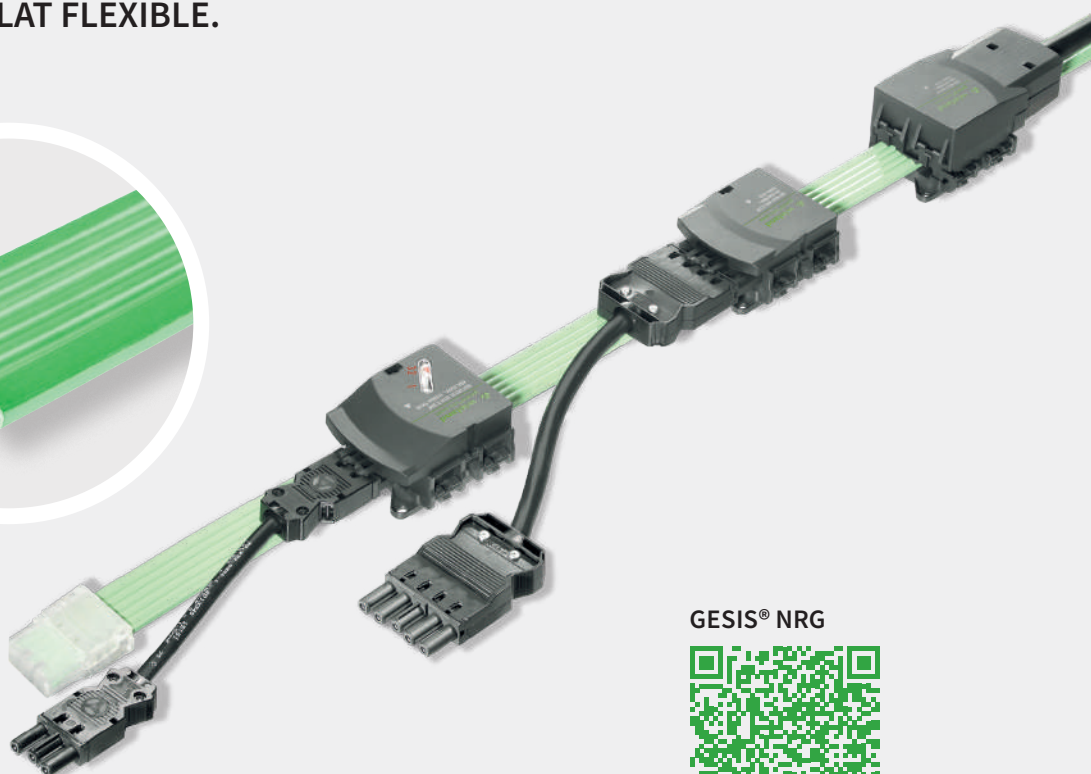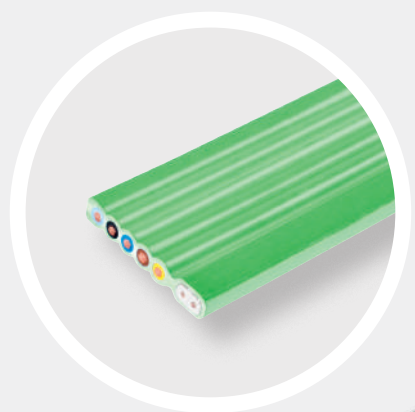

GESIS® NRG



MODULARITÉ

Tous les câbles de 2,5 / 4 mm² avec ou sans bus de la même conception permettent de réaliser une grande variété d'applications avec seulement quelques adaptateurs, ce qui permet d'avoir des listes de pièces claires.

FLEXIBILITÉ

Les adaptateurs peuvent être placés n'importe où à tout moment, ce qui réduit le temps de planification et augmente la flexibilité.

BESOIN DE PEU D'ESPACE

Tous les adaptateurs disposent de câbles ronds et de prises parallèles au câble plat, ce qui permet d'économiser de l'espace d'installation.

COHÉRENCE

Tous les adaptateurs de sortie sont enfichables, avec des valeurs nominales identiques à celles du connecteur (GST18®, GST15, BST14) ce qui permet de réaliser une installation électrique complète.



DESIGN PLUS
powered by: **light+building**

GESIS® NRG, CÂBLE PLAT

5G2,5/4



DONNÉES TECHNIQUES

Tension nominale :	600 V / 1.000 V	Données techniques complémentaires, cf. site internet
Courant nominal :	20 A	

5G2,5 mm²

Couleur du câble	Application	PVC Eca Référence	Sans halogène B2ca s1a d1 a1 Référence
■ noir	Secteur 250/400 V	00.712.0303.1	00.770.0303.1
■ vert	Secteur 250/400 V	00.712.0303.7	00.770.0303.7
■ bleu pastel	Secteur 250 V + pas de TBTS	00.712.0303.6	00.770.0303.6

5G4 mm²

Couleur du câble	Application	Sans halogène B2ca s1a d1 a1 Référence
■ noir	Secteur 250/400 V	00.770.0304.1
■ green	Secteur 250/400 V	00.770.0304.7
■ bleu pastel	Secteur 250 V + pas de TBTS	00.770.0304.6

CÂBLE PLAT 7 PÔLES ET ACCESSOIRES DISPONIBLE SUR DEMANDE.

gesis® NRG

GESIS® NRG, ADAPTATEUR POUR CÂBLE PLAT

DONNÉES TECHNIQUES

Courant nominal :	20 A	Section du connecteur fils 2,5 mm ² - 4 mm ²
IP :	IP20	souples :
Verrouillable :	auto-bloquant (déverrouillage par outil)	Section du connecteur 2,5 mm ² - 6 mm ²
		solide :
		Données techniques complémentaires, cf. site internet

5G2,5/4, pour cordons ronds 12...16 mm

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250/400 V	L3, L2, PE, N, L1	92.050.1553.1
■ bleu pastel	Secteur 250 V + pas de TBTS	D1, D2, L, PE, N	92.050.1653.0

5G2,5/4, avec selecteur de phase, pluggable avec GST18i3

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250 V	L, N, PE	92.031.5453.1

5G2,5/4, pluggable avec GST18i5

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	Secteur 250/400 V	L3, L2, PE, N, L1	92.051.5453.1
■ bleu pastel	Secteur 250 V + pas de TBTS	D1, D2, L, PE, N	92.051.5553.0

Terminaison, pour 5G2,5/4

Couleur	Application	Référence
transparent	Secteur 250/400 V	06.562.0653.0

câble cutter, pour 5G2,5/4 and 5+2


Couleur	Référence
■ gris	95.300.0600.0

Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques



CÂBLAGE D'INFRASTRUCTURE

DISTRIBUTION STRUCTURÉE DE L'ÉNERGIE DANS LE SOL OU LE PLAFOND

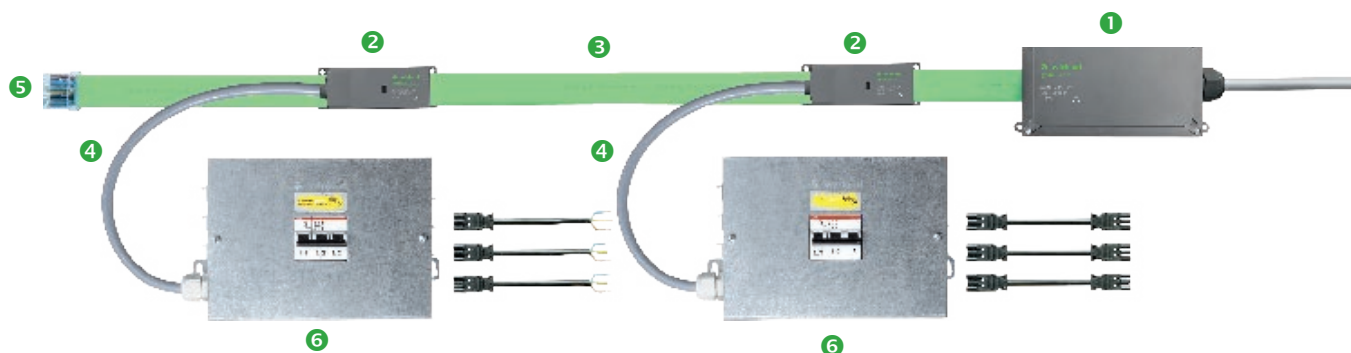

Le câble plat gesis® NRG 5G 10mm² est particulièrement approprié pour une distribution électrique décentralisée. Il peut supporter jusqu'à 50A en triphasé. Wieland fournit des coffrets de protection totalement enfichables.

Référence	Désignation
1 92.050.9053.0	Bloc d'alimentation 5G16 ² pour gesis® NRG 5G10 ² (extrémité de CP)
2 92.050.9153.0	Bloc de dérivation 5G6 ² pour gesis® NRG 5G10 ²
3 00.702.0306.7	Câble plat 10 ² PVC vert clair (Eca)
4 92.238.X000.1	Cordon GST18i3 Xm M/F 2,5 ² HO5VVF noir (Eca)
5 05.563.9553.0	Extrémité câble plat 5G10
6 GESIS® RAN	Coffret métallique sur mesure

DISTRIBUTION DES LUMINAIRES

CIRCULATION AVEC DES DETECTEURS ET BLOCS SECOURS



gis® NRG


ALIMENTATION DES CIRCULATIONS EN CÂBLE PLAT 7 PÔLES

L'alimentation des circulations sera assurée par un système câble plat gesis® NRG 7G2,5mm² prémonté en usine. Il sera équipé de dérivations à sélection de phase permettant l'alimentation des luminaires, détecteurs et blocs secours. Le câble plat sera installé en chemin de câble, chaque câble sera équipé de bouchon d'extrémité au tenant et aboutissant et d'une alimentation acceptant jusqu'à 6mm². Les liaisons entre le câble, luminaires, détecteurs et blocs secours seront assurées à l'aide de cordons HO5VVF

Référence	Désignation
1	00.712.1323.1 Câble plat gesis® NRG 7G2,5mm² PVC noir (Eca)
2	92.050.1553.1 Alimentation secteur (2,5²-6²) pour câble plat 7 pôles
3	91.020.5453.0 Alimentation BUS 2x1,5mm² pour câble plat 7 pôles
4	92.031.5453.1 Adaptateur GST18i3 femelle à sélection de phase
5	92.051.5453.1 Adaptateur GST18i5 noir
6	92.051.5653.0 Adaptateur GST18i5 femelle à sélection de phase bleu
7	92.232.X004.1 Cordon GST 18i3 mâle / dénudé de x ml 1,5mm² HO5VVF noir
8	34.416.0008.9 Détecteur équipé d'un cordon GST18i5 M/- 1ml
9	92.257.X004.9 Cordon GST18i3 mâle / dénudé de x ml 1,5mm² HO5VVF noir
10	06.562.4353.0 Bouchon d'extrémité pour câble plat 7 pôles

ALIMENTATION DE BOITIERS AU SOL

ALIMENTATION EN COURANT TRIPHASÉ JUSTE DEVANT LES BOÎTIERS DE SOL

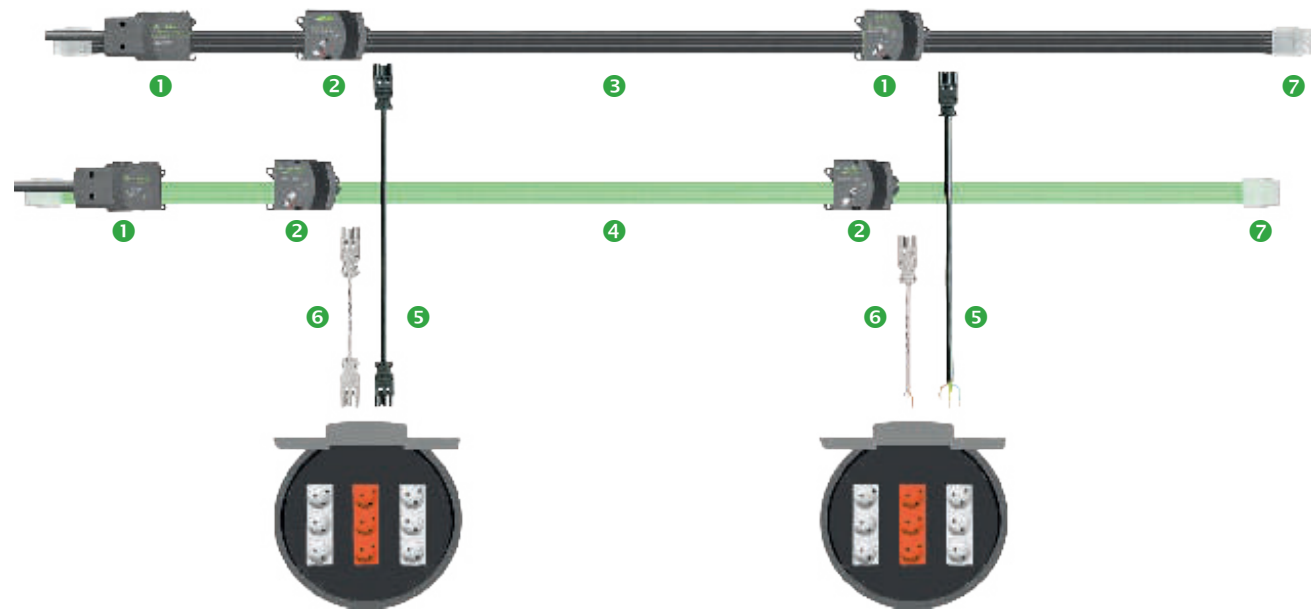

Référence	Désignation
1	92.050.1553.1 Alimentation secteur (2,5²-6²) pour CP 5p
2	92.031.5453.1 Adaptateur GST18i3 femelle sélecteur de phase pour cp 5p
3	00.712.0303.1 Câble plat gesis® NRG 5G2,5² PVC noir (Eca)
4	00.712.0303.7 Câble plat gesis® NRG 5G2,5² PVC vert (Eca)
5	92.238.X004.1 Cordon GST18i3 Xm M/- 2,5² HO5VVF noir (Eca)
6	92.238.X004.2 Cordon GST18i3 Xm M/- 2,5² HO5VVF blanc (Eca)
7	06.562.0653.0 Extrémité de câble plat gesis® NRG 5p

GESIS® RAN BOX

LA BOÎTE DE DISTRIBUTION MULTI
METIERS **SUR MESURE** POUR LA
**GESTION DU CVC, DE L'ÉCLAIRAGE
ET DES STORES.**




GESIS® RAN BOX



AVANTAGES

- + Tous les automates de contrôle à un seul endroit
- + Technologie de raccordement décentralisée
- + Longueurs de câbles réduites, câblage structuré
- + Branchement rapide, flexible, extensible, sans erreur et sans déchets
- + Respect des nouvelles normes environnementales
- + Dupliquable dans les bâtiments type immeuble de bureaux, chambre d'hôtel, hôpital, groupe scolaire etc...

ARCHITECTURE GESIS® RAN BOX MULTI MÉTIERS

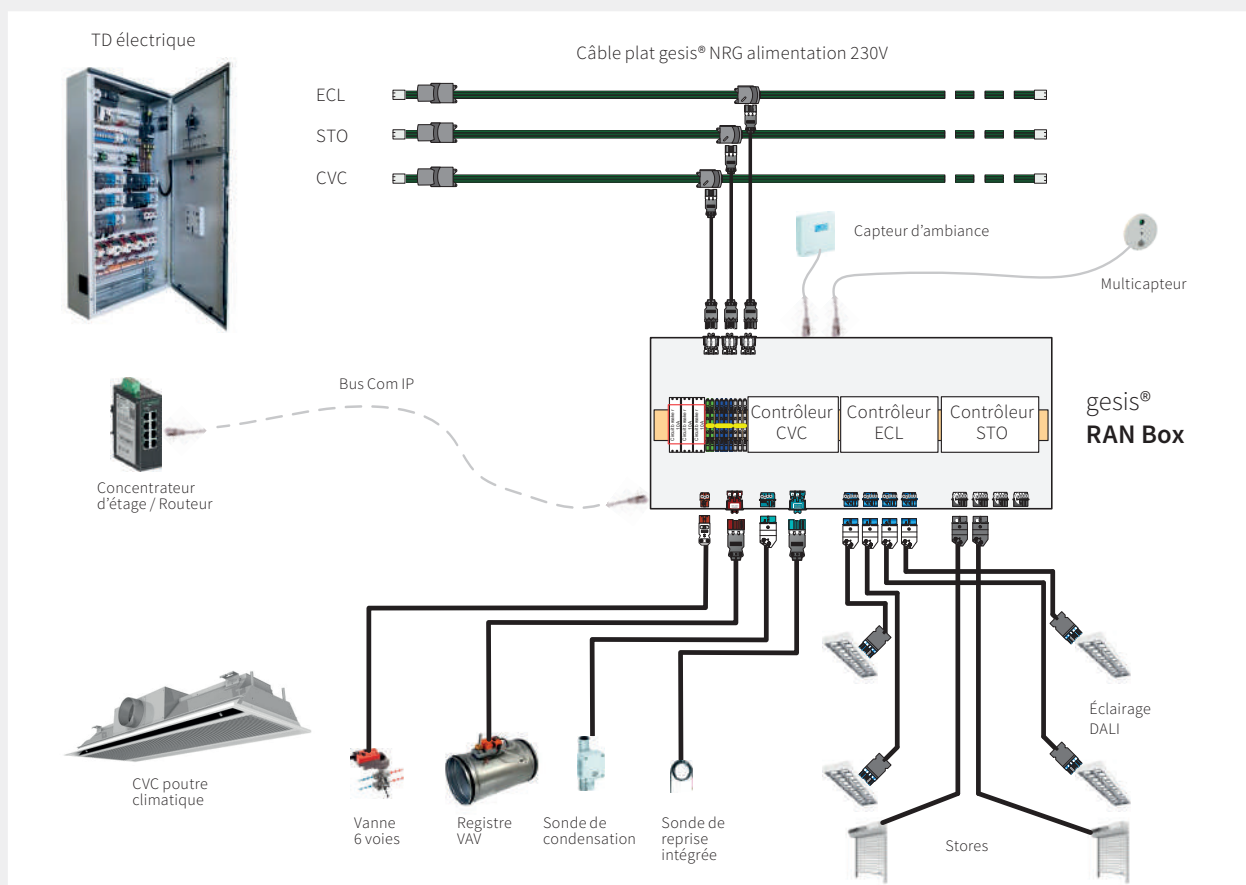



Exemple d'application Wieland PREFAB®



**Distributeur
Wieland PREFAB®**
préinstallé et prêt à être
branché

**Infrastructure
Wieland PREFAB®**
préfabriquée
industriellement

**Interfaces utilisateurs
Wieland PREFAB®**
prises et interrupteurs
pré-assemblés



Wieland PREFAB® est une solution innovante et complète pour le câblage d'infrastructure électrique enfichable des bâtiments parfaitement adaptée pour les exigences de la construction modulaire. Il s'agit des systèmes de connecteurs préfabriqués industriellement gesis® et RST® qui sont assemblés sur mesure.

Grâce à leur fonctionnalité plug & play, ils peuvent être introduits dans le processus de production de bâtiments fabriqués en série de manière simple, sûre et rapide, qu'il s'agisse de construction modulaire sèche ou humide.

RST®

CONNECTEURS RONDS ÉTANCHES



RST® MICRO / MINI / CLASSIC / POWER



ROBUSTES, STABLES, RÉSISTANTS ET ÉTANCHE.

Les différents modèles du système de connecteurs ronds RST® proposent des solutions pour toutes vos applications en milieu difficile, avec des indices de protection adaptés :



APPLICATIONS

- + Data center
- + Coffret de chantier
- + Horticulture
- + Éolien
- + Installation solaire
- + Tunnels et parkings
- + Événementiel extérieur
- + Parcs et jardins
- + Construction navale



Totalement protégé contre les projections d'eau



Immersion prolongée (3m ; 2h)



Vapeur d'eau à **haute pression et le nettoyage**



Nettoyage intensif avec des **jets à haute pression** et à **haute et basse température**

RST®
CATALOGUE



COMPARAISON DE TEMPS : INSTALLATION D'UN LUMINAIRE

INSTALLATION CONVENTIONNELLE



20 MIN

ÉTAPES DE TRAVAIL

BRANCHEMENT AU RÉSEAU

- 1 Dénuder la gaine du câble
- 2 Insérer le câble dans la boîte de jonction
- 3 Dénuder les fils
- 4 Connecter les fils
- 5 Fermer la boîte de jonction

INSTALLATION DU LUMINAIRE

- 1 Ouvrir le luminaire
- 2 Couper le câble à la longueur voulue
- 3 Insérer le câble dans le luminaire
- 4 Dénuder les fils
- 5 Connecter les fils
- 6 Fermer le luminaire



SOLUTION ENFICHABLE DE WIELAND AVEC RST®



4 MIN

ÉTAPES DE TRAVAIL

BRANCHEMENT AU RÉSEAU

- 1 Sélectionner la longueur souhaitée du câble préconfectionné
- 2 Brancher dans le bloc de distribution

INSTALLATION DU LUMINAIRE

- 1 Plug & play



VIDEO DE COMPARAISON

Enfichable vs. traditionnel
L'avenir est pluggable.



Scannez le code QR -
regardez la vidéo sur YouTube.

RST® MICRO

CONNECTEUR MINIATURE AVEC PROTECTION IP MAXIMALE.

Avec son indice de protection le plus élevé (IP69), le RST MICRO permet même une installation sûre dans des conditions environnementales difficiles, ce qui le rend idéal pour une utilisation à l'extérieur, par exemple pour les lampes Led, les signaux et le réseau. Grâce à ses valeurs nominales, les applications en réseau ne posent pas non plus de problème.



- + 2 à 5 pôles
- + Section du connecteur 0,2 à 1,0 mm²
- + Tension nominale 250/400 V
- + Courant nominal 8 A (10 A à 1,0 mm²)

RST08i2



Codage mécanique (interface femelle) selon application	noir	bleu clair	gris foncé	gris clair
Tension nominale	250 V	250/400 V	~50/-120 V	~50/-120 V
Marquage des pôles	1, 2/N,	1, 2/N	1, 2	1, 2

RST08i3



Codage mécanique (interface femelle) selon application	noir	bleu clair	gris foncé	gris clair
Tension nominale	250 V + PE	250/400 V	~50/-120 V	~50/-120 V + PE
Marquage des pôles	1, PE, 2/N,	1, 2/N, 3	1, 2, 3	1, 2, PE

RST08i4



Codage mécanique (interface femelle) selon application	noir	bleu clair	gris foncé	gris clair
Tension nominale	250/400 V + PE	250/400 V	~50/-120 V	~50/-120 V
Marquage des pôles	1, PE, 2/N, 3	1, 2/N, 3, 4	1, 2, 3, 4	1, 2, 3, 4

RST08i5



Codage mécanique (interface femelle) selon application	noir	bleu clair	gris foncé	gris clair
Tension nominale	250/400 V + PE	250/400 V	~50/-120 V	~50/-120 V + PE
Marquage des pôles	1, 2N, 3, 4, PE	1, 2/N, 3, 4, 5	1, 2, 3, 4, 5	1, 2, 3, 4, PE

RST08I3, 3 PÔLES

CONNECTEURS À VIS

femelle

mâle



DONNÉES TECHNIQUES

Tension nominale :	8 A	Section fils souples :	0,22 mm ² - 1 mm ²
IP :	66/68 (3m;2h) /IP69	Section fils rigides :	0,2 mm ² - 1 mm ²
Terminaisons par pôle :	1	Données techniques complémentaires, cf. site internet	
Verrouillable :	auto-bloquant (déverrouillage manuel)		

Connexion à vis, droit, pour cordons Ø 4-7 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	250/400 V avec PE	1, PE, 2/N	41.031.3053.1	41.032.3053.1
■ bleu clair	250/400 V	1, 2/N, 3	41.031.3043.9	41.032.3043.9



Répartiteur 1 entrée / 2 sorties, en parallèle, avec option de fixation

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	250/400 V avec PE	1, PE, 2/N	4L.030.1153.1
■ bleu clair	250/400 V	1, 2/N, 3	4L.030.1143.9



Répartiteur 1 entrée / 3 sorties, en parallèle, avec option de fixation

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	250/400 V avec PE	1, PE, 2/N	4L.030.0153.1
■ bleu clair	250/400 V	1, 2/N, 3	4L.030.0143.9

RST08I3, CORDONS CONFECTIONNÉS 0,75 mm², 3 PÔLES

DONNÉES TECHNIQUES

Tension nominale :	6 A	Type de fixation :	à vis
IP :	66/68 (3m;2h) /IP69	Données techniques complémentaires, cf. site internet	
Verrouillable :	auto-bloquant (déverrouillage manuel)		

Cordon confectionné, mâle - femelle

Couleur du câble :	
Couleur de codage :	■ noir
Application :	250/400 V avec PE
Marquage des pôles :	1, PE, 2/N
avec étanchéité longitudinal	



H05RN-F halogéné	
Longueur (m)	Référence
0,5	4L.437.0530.1
1	4L.437.1030.1
1,5	4L.437.1530.1
2	4L.437.2030.1
2,5	4L.437.2530.1
3	4L.437.3030.1
3,5	4L.437.3530.1

ACCESSOIRES



Bouchon avec filin pour connecteur 2-/3 pôles

Couleur	femelle Référence	mâle Référence
■ noir	06.563.5053.1	06.563.5153.1



Tournevis

Référence
06.502.6300.0

Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques



wieland

33

RST® MICRO

RST® MINI



CONNECTEUR DE PETITE TAILLE ÉTANCHE POUR DES ESPACES TRÈS CONFINÉS.

- + 2 à 5 pôles
- + Section du connecteur 0,2 à 2,5 mm²
- + Tension nominale 250/400 V
- + Courant nominal 16 A
- + Technologie TWISTLOCK avec verrouillage automatique



RST® MINI



RST16i2



Codage mécanique (interface femelle) selon application	noir	gris clair	vert	bleu clair	turquoise	marron
Tension nominale	250 V	250 V	250/400 V	250/400 V	250/400 V	~50/-120 V
Marquage des pôles	1, N	1, N	1, 2	1, 2	D1, D2	1, 2

RST16i3



Codage mécanique (interface femelle) selon application	noir	gris clair	vert	bleu clair	turquoise	marron
Tension nominale	250 V + PE	250 V + PE	250/400 V + PE	250/400 V	250/400 V + PE	~50/-120 V
Marquage des pôles	1, N, PL	1, N, PL	1, 2, PL	1, 2, 3	D1, D2, PL	1, 2, 3

RST16i4



Codage mécanique (interface femelle) selon application	noir	gris clair	marron
Tension nominale	250 V + PE	250 V + PE	~50/-120 V
Marquage des pôles	1, 2, 3, PE	1, 2, 3, PE	1, 2, 3, 4

RST16i5



Codage mécanique (interface femelle) selon application	noir	gris clair	turquoise	bleu clair	marron
Tension nominale	250/400 V + PE	250/400 V + PE	250 V + PE	250/400 V + PE	~50/-120 V
Marquage des pôles	1, 2, 3, N, PL	1, 2, 3, N, PL	L, N, PE, 1, 2	1, 2, 3, 4, 5	1, 2, 3, 4, 5

RST16I3, 3 PÔLES

CONNECTEURS

femelle

mâle



DONNÉES TECHNIQUES

Tension nominale :	16 A	Section du connecteur	0,25 mm ² - 2,5 mm ²
IP :	IP66/68 (3m;2h) /IP69	fils souples :	
Terminaisons par pôle :	1	Section du connecteur	0,25 mm ² - 2,5 mm ²
Verrouillable :	auto-bloquant (déverrouillage manuel)	solide :	
Données techniques complémentaires, cf. site internet			

Connexion à vis, droit, pour cordons de Ø 5-9,5 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	250 V avec PE	L, N, PE	46.031.4553.1	46.032.4553.1
■ bleu clair	250/400 V	1, 2, 3	46.031.4553.9	46.032.4553.9

RÉPARTITEURS



DONNÉES TECHNIQUES

Tension nominale :	16 A	Verrouillable :	auto-bloquant (déverrouillage manuel)
IP :	IP66/68 (3m;2h) /IP69	Données techniques complémentaires, cf. site internet	

Répartiteur 1 entrée / 2 sorties, en parallèle, avec option de fixation sur 06.562.5853.0 / 06.562.5853.1

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	250 V avec PE	L, N, PE	46.030.1253.1
■ bleu clair	250/400 V	1, 2, 3	46.030.1253.9

CORDONS CONFECTIONNÉS

1,5 mm², 16 A

DONNÉES TECHNIQUES

Tension nominale :	16 A	Verrouillable :	auto-bloquant (déverrouillage manuel)
IP :	IP66/68 (3m;2h) /IP69	Données techniques complémentaires, cf. site internet	

Cordon confectionné, mâle - femelle

	H07RN-F Eca	H05VV-F Eca	H05Z1Z1-F sans halogène
Longueur (m)	Référence	Référence	Référence
	■ noir	■ noir	■ noir
Couleur du câble :			
Couleur de codage :	■ noir		
Application :	250 V avec PE		
Marquage des pôles :	L, N, PE		
0,5	46.432.0530.1	46.432.0500.1	
1	46.432.1030.1	46.432.1000.1	46.432.10C0.1
2	46.432.2030.1	46.432.2000.1	46.432.20C0.1
3	46.432.3030.1	46.432.3000.1	
4	46.432.4030.1	46.432.4000.1	
5	46.432.5030.1	46.432.5000.1	



ACCESSOIRES



Bouchon avec filin pour connecteur 2-/3 pôles

Couleur	femelle Référence	mâle Référence
■ noir	06.563.8753.1	06.563.8953.1

RST® CLASSIC



- + 2 à 7 pôles
- + Section du connecteur 0,2 à 6 mm²
- + Tension nominale 250/400 V
- + Courant nominal 20 A/25 A (32 A à 6 mm²)
- + Système à la flexibilité maximale



RST20i2



Codage mécanique selon application	noir	gris clair	vert	gris silex	marron
Tension nominale	250 V	250 V	250 V	~50/-120 V	~50/-120 V

RST20i3



Codage mécanique selon application	noir	gris silex	vert	bleu clair	marron
Tension nominale	250 V	250 V	250/400 V	250/400 V	~50/-120 V

RST20i5



Codage mécanique selon application	noir	gris silex	bleu turquoise	bleu clair	jaune	marron
Tension nominale	250/400 V	250/400 V	250 V	250/400 V	250/400 V	~50/-120 V

RST20i7



Codage mécanique (interface femelle) selon application	noir	gris clair	turquoise	bleu clair
Tension nominale	250/400 V + PE	250/400 V + PE	250/400 V + PE	250/400 V

RST25i3 et 25i5



Codage mécanique (interface femelle) selon application	gris beton	gris beton
Tension nominale	250V + PE	250/400V + PE

Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques

RST20I3, 3 PÔLES

CONNECTEURS À VIS

femelle



mâle



DONNÉES TECHNIQUES

Tension nominale :	20 A	Section du connecteur fils	0,75 mm ² - 6 mm ²
IP :	IP66/68 (3m;2h) /IP69	souples :	
Terminaisons par pôle :	1	Section du connecteur	0,75 mm ² - 6 mm ²
Verrouillable :	auto-bloquant (déverrouillage par outil)	solide :	
		Données techniques complémentaires, cf. site internet	

droit, pour cordons Ø 6-10 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	250 V avec PE	L, N, PE	96.031.4053.1	96.032.4053.1

droit, pour cordons Ø 10-14 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	250 V avec PE	L, N, PE	96.031.4153.1	96.032.4153.1

DÉRIVATIONS

femelle



mâle



Dérivation double, pour cordons Ø 10-14 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	250 V avec PE	L, N, PE	96.031.4353.1	96.032.4353.1

CONNECTEURS À RESSORTS

DONNÉES TECHNIQUES

Tension nominale :	20 A	Section du connecteur fils	0,5 mm ² - 1,5 mm ²
IP :	IP66/68 (3m;2h) /IP69	souples :	
Terminaisons par pôle :	2	Section du connecteur	0,5 mm ² - 2,5 mm ²
Verrouillable :	auto-bloquant (déverrouillage par outil)	solide :	
		Données techniques complémentaires, cf. site internet	

droit, pour cordons Ø 6-10 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	250 V avec PE	L, N, PE	96.031.0053.1	96.032.0053.1

droit, pour cordons Ø 10-14 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	250 V avec PE	L, N, PE	96.031.0153.1	96.032.0153.1

femelle



mâle



DÉRIVATIONS

femelle



mâle



Dérivation double, pour cordons Ø 10-14 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	250 V avec PE	L, N, PE	96.031.0353.1	96.032.0353.1

RÉPARTITEURS

DONNÉES TECHNIQUES

Tension nominale :	20 A	Données techniques complémentaires, cf. site internet	
IP :	IP66/68 (3m;2h) /IP69		
Verrouillable :	auto-bloquant (déverrouillage par outil)		

Répartiteur 1 entrée / 3 sorties, en parallèle, avec option de fixation

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	250 V avec PE	L, N, PE	96.030.0153.1

Boîte de répartition 1 entrée / 7 sorties, en parallèle, avec option de fixation

Couleur de codage	Application	Marquage des pôles	Référence
■ noir	250 V avec PE	L, N, PE	99.929.0000.7



Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques



RST20I3, 3 PÔLES

CORDONS CONFECTIONNÉS

1,5 MM², 16 A



DONNÉES TECHNIQUES

Tension nominale :	16 A	Données techniques complémentaires, cf. site internet
IP :	IP66/68 (3m;2h)	
Verrouillable :	auto-bloquant (déverrouillage par outil)	

Cordon confectionné, mâle - femelle

Couleur du câble :
Couleur de codage : ■ noir
Application : 250 V avec PE
Marquage des pôles : L, N, PE

	H07RN-F	H05Z1Z1-F Sans halogène Cca s1 d1 a1	H05VV-F PVC Eca
Longueur (m)	Référence	Référence	Référence
	■ noir	■ noir	■ noir
1	96.232.1030.1	96.232.10C0.1	96.232.1000.1
2	96.232.2030.1	96.232.20C0.1	96.232.2000.1
3	96.232.3030.1		96.232.3000.1
4	96.232.4030.1		96.232.4000.1
5	96.232.5030.1		96.232.5000.1
6	96.232.6030.1		96.232.6000.1
7	96.232.7030.1		96.232.7000.1
8	96.232.8030.1		96.232.8000.1

RST20I5, 5 PÔLES

CONNECTEURS À VIS

DONNÉES TECHNIQUES

Tension nominale :	20 A	Section du connecteur fils 0,75 mm ² - 4 mm ²
IP :	IP66/68 (3m;2h) /IP69	souples :
Terminaisons par pôle :	1	Section du connecteur 0,75 mm ² - 4 mm ²
Verrouillable :	auto-bloquant (déverrouillage par outil)	solide :
		Données techniques complémentaires, cf. site internet

femelle



mâle



Connecteur droit, pour cordons Ø 10-14 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	250/400 V avec PE	1, 2, 3, N, PE	96.051.4153.1	96.052.4153.1
■ bleu turquoise	250 V avec PE	D1, D2, L, PE, N	96.051.4153.6	96.052.4153.6

DÉRIVATIONS

femelle



mâle



Dérivation double, pour cordons Ø 10-14 mm

Couleur de codage	Application	Marquage des pôles	femelle Référence	mâle Référence
■ noir	250/400 V avec PE	1, 2, 3, N, PE	96.051.4353.1	96.052.4353.1
■ bleu clair	250/400 V	1, 2, 3, 4, 5	96.051.4353.9	
■ bleu turquoise	250 V avec PE	D1, D2, L, PE, N	96.051.4353.6	96.052.4353.6
■ marron	~50/~120 V avec PE	1, 2, 3, 4, 5	96.051.4351.4	

ACCESSOIRES



Bouchon avec filin

Couleur		femelle Référence	mâle Référence
■ noir	pour connecteur 2-/3 pôles	99.414.6205.2	99.416.6205.2
■ noir	pour connecteur 5-/5 pôles	99.530.0000.7	99.532.0000.7

RST® CLASSIC ATEX

Les connecteurs pour une utilisation dans des conditions environnementales dangereuses.

RST® CLASSIC



CARACTÉRISTIQUES

- + 2- à 5-pôles
- + ATEX pour zones 2/22
- + Classification
Ex II 3G Ex ec IIC T6 Gc
Ex II 3D Ex tc IIIC T85 °C Dc

RST® CLASSIC



INSTALLATIONS
OUTDOOR RST®



RST® POWER

CONNECTEUR À COURANT ÉLEVÉ POUR LES GRANDES SECTIONS.

La série RST® POWER est particulièrement destinée à la construction d'appareils. Avec une capacité de charge de 50 A et une conception extrêmement compacte, ce connecteur peut être utilisé pratiquement partout.



DATACENTER

- + 4 et 5 pôles
- + Section du connecteur 4,0 à 16 mm²
- + Tension nominale 250/400 V
- + Courant nominal 50 A
- + M32 et M40

RST50i4



Codage mécanique (interface femelle) selon application

noir

Tension nominale

250V/400 + PE

Marquage des pôles

1, 2, 3, PE

RST50i5



Codage mécanique (interface femelle) selon application

noir

Tension nominale

250V/400 + PE

Marquage des pôles

1, 2, 3, N, PE

RST® POWER



RST50I5, 5 PÔLES

CONNECTEURS À VIS



DONNÉES TECHNIQUES				
Tension nominale :	50 A	Section du connecteur fils	4 mm ² - 16 mm ²	
IP :	IP66/67/69	souples :		
Terminaisons par pôle :	1	Section du connecteur	4 mm ² - 6 mm ²	
Verrouillable :	auto-bloquant (déverrouillage par outil)	solide :		
		Données techniques complémentaires, cf. site internet		
droit, pour cordons Ø 15-25 mm			femelle	mâle
Couleur de codage	Application	Marquage des pôles	Référence	Référence
■ noir	250/400 V avec PE	1, 2, 3, N, PE	97.051.4053.1	97.052.4053.1
droit, pour cordons Ø 20-32mm			femelle	mâle
Couleur de codage	Application	Marquage des pôles	Référence	Référence
■ noir	250/400 V avec PE	1, 2, 3, N, PE	97.051.4253.1	97.051.4253.1

CONNECTEURS À VIS POUR APPAREILLAGE M32, 5 PÔLES



DONNÉES TECHNIQUES				
Tension nominale :	50 A	Section du connecteur fils	4 mm ² - 16 mm ²	
IP :	IP66/67/69	souples :		
Terminaisons par pôle :	1	Section du connecteur	4 mm ² - 16 mm ²	
Verrouillable :	auto-bloquant (déverrouillage par outil)	solide :		
		Données techniques complémentaires, cf. site internet		
droit, position verrouillé			femelle	mâle
Couleur de codage	Application	Marquage des pôles	Référence	Référence
■ noir	250/400 V avec PE	1, 2, 3, N, PE	97.051.5553.1	97.052.55053.1
droit, position non verrouillée			femelle	mâle
Couleur de codage	Application	Marquage des pôles	Référence	Référence
■ noir	250/400 V avec PE	1, 2, 3, N, PE	97.051.5053.1	97.051.5053.1

ACCESSOIRES



Bouchon pour femelle et mâle	
Couleur	Référence
■ noir	Z5.567.5653.0



Autres codages de couleur, autres nombres de pôles, cordons en diff. longueurs et versions (mâle ou femelle dénudé, avec ou sans halogène) disponibles sur demande.
Sous réserve de changements techniques

TESTEZ NOS SOLUTIONS



Malette d'échantillons
podis® CON
Réf. 99.785.0000.0



Malette d'échantillons
podis® CON avec RST® CLASSIC
Réf. 99.789.0000.0



Malette d'échantillons
gesis® MINI
Réf. 99.491.0000.0



Malette d'échantillons
gesis® CLASSIC
Réf. 99.460.0000.1



Malette d'échantillons
gesis® NRG
Réf. 99.681.0000.0



Malette d'échantillons
gesis® RAN
Réf. 99.433.0000.1



Malette d'échantillons
RST08i3 RST® MiCRO
Réf. 99.431.0000.1



Malette d'échantillons
RST20i3
Réf. 99.4290000.0



Malette d'échantillons
RST20i25
Réf. 99.430.0000.0



Malette d'échantillons
RST20i2 ... i7
Réf. 99.431.0000.0



Malette d'échantillons
RST20i7
Réf. 99.439.0000.1



Malette d'échantillons
RST16i3
Réf. 99.674.0000.0



Malette d'échantillons
RST16i5 RST® MINI
Réf. 99.675.0000.0



Malette d'échantillons
RST20i7, 6 et 7 pôles
Réf. 99.696.0000.0



Malette d'échantillons
RST50i5 RST® POWER
Réf. 99.628.0000.0

RST

DES KITS **RST®** SONT DISPONIBLES DANS LES POINTS DE VENTE
AUPRÈS DES DISTRIBUTEURS.



SIMPLE



DOUBLE



TRIPLE

Référence Désignation

34.428.0000.2	Kit simple dérivation
34.428.0000.4	Kit double dérivation
34.428.0000.6	Kit triple dérivation

Certifications





INFO TO GO

TOUTES LES BROCHURES DE WIELAND ELECTRIC SONT DISPONIBLES EN TÉLÉCHARGEMENT SUR NOTRE SITE.

<https://www.wieland-electric.com/en/support/downloads>

Intéressant pour vous :

GESIS® DISTRIBUTION BOXES

Automatisation décentralisée des bâtiments fonctionnels avec plug & play
Catalogue Réf. 0702.1 (anglais)



GESIS® CATALOGUE

L'installation électrique enfichable
Catalogue Réf. 0670.1 (anglais)



GESIS® NRG

Exemples d'application pour le câble plat
Catalogue Réf. 0663.1 (anglais)



INFO TO GO



WIELAND SUR YOUTUBE

VOIR NOS PRODUITS EN MOUVEMENT

EN : <https://www.youtube.com/user/WielandElectric>
FR : <https://www.youtube.com/user/WielandElectricFrance>



EN : <https://www.linkedin.com/company/wielandelectric>
FR : <https://www.linkedin.com/company/wieland-electric-france>



CONSULTATION TECHNIQUE SOLUTIONS POUR LE BÂTIMENT

info.france@wieland-electric.com
Dans le monde : <https://wie.li/contactinternational>



JUSTE UN CLIC PLUS LOIN

LE WIELAND E-SHOP

PLUS DE 25.000 PRODUITS -
À TOUT MOMENT

Dans notre boutique en ligne, vous trouverez toutes les informations sur nos produits, les prix et les données techniques.

<https://eshop.wieland-electric.com>

Scannez le QR code -
voir nos produits
dans le E-SHOP.





wieland

Wieland Electric SARL
47 avenue des Genottes
Le Cérame / Hall 6 - CS48313
95803 Cergy-Pontoise · France

Tél +33130320707
Fax +33130320717
info.france@wieland-electric.com

0940.2 LN 04/22

Représenté dans plus de 70 pays :

www.wieland-electric.com